


0827NL SERIES NO LEAD FORGED BRASS BALL VALVE (THREADED)

SPECIFICATION:

- Threads conform to ANSI / ASME B1.20.1
- 1/4" thru 2" rated 600 PSI CWP, 2-1/2" thru 4" rated 400 PSI CWP
- CWP - Cold Working Pressure, is an indication of the pressure rating for valves at a temperature range of up to +100°F (37°C)
- WSP (Working Steam Pressure) Rating: 150 PSI Saturated Steam
- Working Temperature: -20°~300°F (-28°~150°C)
- Forged brass body
- Blow-out proof stem
- Solid Stainless Steel Ball - sizes 1/4" through 1"
- Hollow Stainless Steel Ball - sizes 1-1/4" through 4"
- Zinc plated steel handle with yellow plastic sleeve



CERTIFICATION:

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard IGC 157 Certified: 1/4" to 2" FPT
- CSA listed to the following standards, ♦ applies to 1/4" to 2" FPT only
 - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2 PSI)
 - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
 - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
- UL listed to the following standards, 1/4" to 2" FPT
 - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" to 1") 300 PSI (1-1/4" to 2")
 - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" to 1") 300 PSI (1-1/4" to 2")
 - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" to 1") 300 PSI (1-1/4" to 2")
 - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" to 1") 300 PSI (1-1/4" to 2")
 - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" to 1") 300 PSI (1-1/4" to 2")
- FM Standard 1140 Certified: 1/4" to 2" FPT
- CRN Registered


MATERIAL LIST	
Part Name	Material
Body	Brass
Seat	PTFE
Ball	Stainless Steel
O-Ring	NBR Rubber
Packing Nut	NL Brass
Stem	Chrome Plated Brass (1/4" - 2")
	Stainless Steel (2-1/2" - 4")
Handle Nut	Plated Steel
Lock Washer	Plated Steel
Packing	PTFE
Handle	Plated Steel
Cap	NL Brass

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com

0827NL SERIES NO LEAD FORGED BRASS BALL VALVE (THREADED)

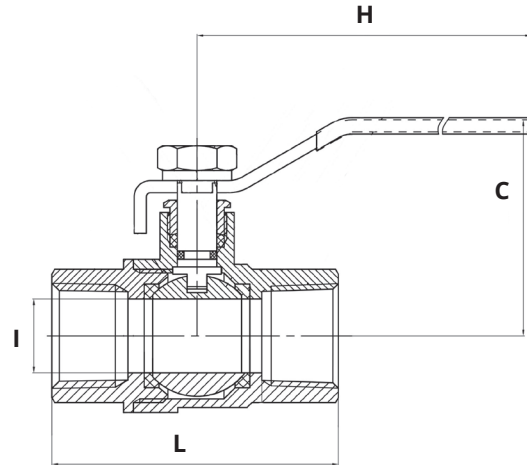

DIMENSIONS										
Part No.	Description	I		L		H		C		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	
0827-02NL ◇	1/4" FPT	0.39	10.00	1.73	44.00	3.46	88.00	1.68	42.70	140
0827-03NL ◇	3/8" FPT	0.39	10.00	1.75	44.50	3.46	88.00	1.68	42.70	140
0827-05NL ◇	1/2" FPT	0.59	15.00	2.24	57.00	3.46	88.00	1.81	46.00	200
0827-07NL ◇	3/4" FPT	0.75	19.00	2.52	64.00	4.29	109.00	2.09	53.20	330
0827-10NL ◇	1" FPT	0.98	25.00	2.97	75.50	4.29	109.00	2.25	57.20	510
0827-12NL ◇	1-1/4" FPT	1.26	32.00	3.44	87.50	5.63	143.00	2.53	64.20	760
0827-15NL ◇	1-1/2" FPT	1.57	40.00	3.88	98.50	5.63	143.00	2.74	69.70	1060
0827-20NL ◇	2" FPT	1.94	49.30	4.29	109.00	5.63	143.00	3.04	77.20	1510
0827-25NL	2-1/2" FPT	2.56	65.00	9.45	240.03	5.22	132.59	4.72	119.89	3115
0827-30NL	3" FPT	2.95	75.01	9.45	240.03	5.77	146.56	5.32	135.13	4125
0827-40NL	4" FPT	3.90	99.01	9.53	242.06	7.38	187.45	5.70	144.78	7450

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ **blog.boshart.com**

© 2020 Boshart Industries Inc. All Rights Reserved.

BII-0827NL-1020(2481)