

SUBMITTAL DATA SHEET

No-Lead Low Pressure Valves
Bronze Y-Strainer – 72052S

SWT X SWT



A.Y. McDonald Mfg. Co. No-Lead Low Pressure Valves are constructed from heavy duty no-lead bronze and are recommended for residential and commercial applications and positive shut-off with various inlet configurations.

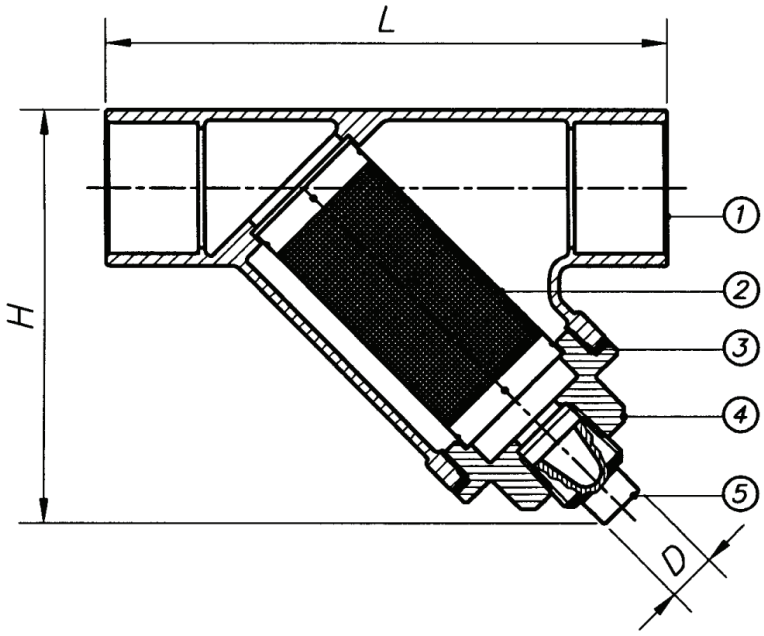

Dimensions

Size	D	H	L
1/2”	0.45	2.83	3.42
3/4”	0.45	3.26	4.31
1”	0.52	3.77	5.09
1 1/4”	0.52	4.37	5.90
1 1/2”	0.52	4.82	6.88
2”	0.52	5.90	8.62

Materials

No.	Part	Material
1	Body	No-Lead Bronze
2	Filter	Stainless Steel 304
3	Packing	Fibre “H”
4	Bonnet	No-Lead Bronze
5	Plug	No-Lead Bronze

SUBMITTAL INFORMATION

- 300 WOG - 150 WSP
- Sizes: 1/2”, 3/4”, 1”, 1 1/4”, 1 1/2”, & 2”
- Threads conform to ANSI B1.20.1
- Solder ends conform to ANSI B16.18
- 20 Mesh SS screen
- Directional
- Complies with NSF/ANSI 372-2010

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.

A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: