
## SUBMITTAL DATA SHEET

## NL Ball Style Curb Stop – 76100-33



-33 PEP Compression x -33 PEP Compression

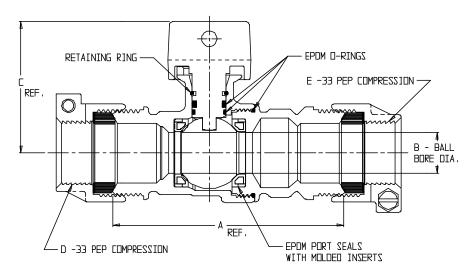

MODEL	SIZE	A	В	Ε	D	Е
76100-33	3⁄4	4.25	,75	2.42	3⁄4	3⁄4
76100-33	3⁄4 X 1 X 3⁄4	4,49	1.00	2,65	3/4	3/4
76100-33	3⁄4 X 1 X 1	4.79	1.00	2,65	3/4	1
76100-33	1	4,79	1.00	2.65	1	1
76100-33	1 1/4	5.72	1.25	2.94	1 1/4	1 1/4
76100-33	1 1/2 X 2 X 1 1/2	8.52	2.00	Э.71	1 1/2	1 1/2
76100-33	2	8.76	2.00	3.71	2	2

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.** P.O. Box 508 Dubuque, IA 52004-508 **Toll Free:** 1-800-292-2737 **Fax:** 1-800-832-9296 **Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

## Submitted by: