

# SUBMITTAL DATA SHEET

## NL Ball Style Meter Stop – 76100MW-44


-44 PVC Compression x Meter



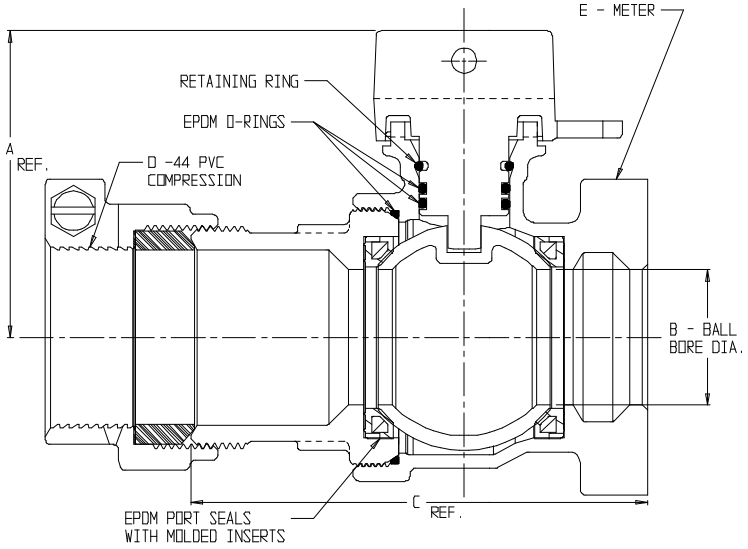


| MODEL | SIZE | A | B | C | D | E |
|---|---|---|---|---|---|---|
| 76100MW-44 | 1 1/2 | 3.40 | 1.50 | 5.05 | 1 1/2 | 1 1/2 |
| 76100MW-44 | 2 | 3.71 | 2.00 | 7.32 | 2 | 1 1/2 OR 2 |

DRAWING MAY NOT RESEMBLE ACTUAL VALVE CONFIGURATION

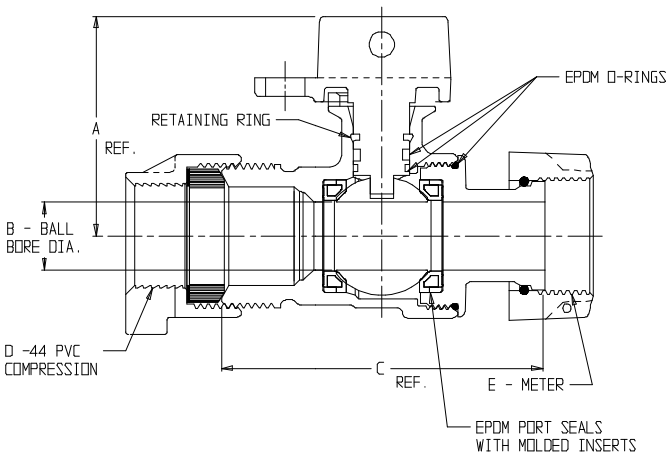


| MODEL NO. | SIZE | A | B | C | D | E |
|---|---|---|---|---|---|---|
| 76100MW-44 | 3/4 X 5/8 X 3/4 | 2.33 | .63 | 3.90 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MW-44 | 3/4 | 2.43 | .75 | 3.56 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MW-44 | 3/4 X 3/4 x 5/8 | 2.33 | .75 | 3.90 | 3/4 | 5/8 |
| 76100MW-44 | 1 | 2.65 | 1.00 | 4.89 | 1 | 1 |

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker


**A.Y. McDonald Mfg. Co.**
P.O. Box 508
Dubuque, IA 52004-508

**Toll Free:** 1-800-292-2737
**Fax:** 1-800-832-9296
**Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com



A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.


**Submitted by:**