
SUBMITTAL DATA SHEET

No-Lead Low Pressure Valves
Iron Y-Strainer – 2053T

FNPT x FNPT



A.Y. McDonald Mfg. Co. Low Pressure Valves are constructed from heavy duty brass and are recommended for residential and commercial applications and provide positive shut-off with various inlet configurations.

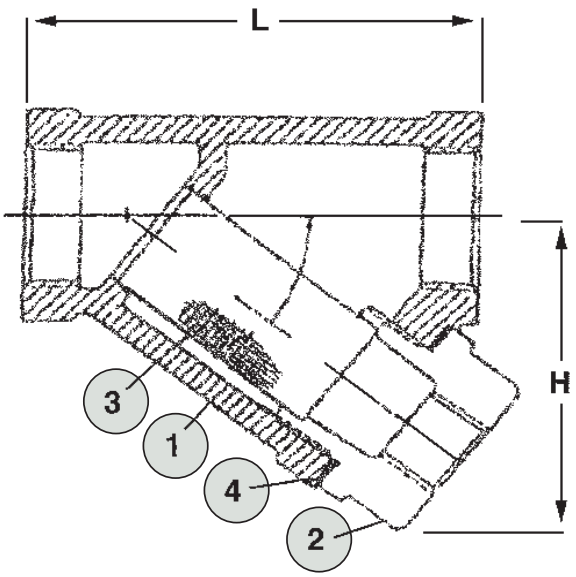

Dimensions

Size	A	B	C	D	E
1/2”	1.63	1.04	.72	1.85	.82
3/4”	1.85	1.26	.72	2.03	1.07
3/4” x 1/2”	1.85	1.26	.72	1.89	.82
1”	2.14	1.54	.72	2.27	1.32
1 1/4”	2.56	1.86	.85	2.52	1.57
1 1/2”	2.95	2.15	.97	2.53	1.83
2”	3.76	2.74	1.06	2.85	2.38

Materials

No.	Part	Material
1	Body	Cast Iron
2	Cover	Cast Iron
3	Screen	20 Mesh SS
4	Gasket	Non-Asbestos

SUBMITTAL INFORMATION

- Sizes: 1/2”, 3/4”, 1”, 1 1/4”, 1 1/2”, 2”
- 500 WOG - 250 WSP
- Threads conform to ANSI B1.20.1
- 20 Mesh SS screen
- Directional

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.

A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: