
SUBMITTAL DATA SHEET

Ball Valves - Full Port w/Locking Handle Ball Valve - 2032TL

FNPT X FNPT



A.Y. McDonald Mfg. Co. Full Port Ball Valves are constructed of heavy duty brass and can be used with a full range of liquids and gases in commercial, industrial and residential applications. Full Port valves allow for maximum flow with minimum pressure drop.

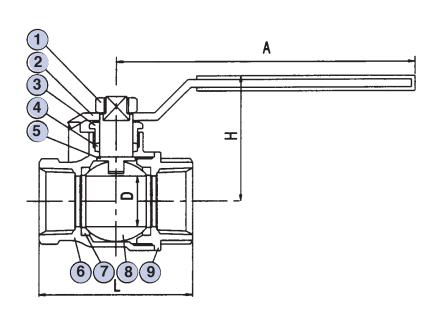

Dimensions

Size	L	Н	D	Α
1/2"	1.99	1.52	.50	3.28
3/4"	2.34	1.95	.78	4.60
1"	.85	2.11	.98	4.60
1 1/4"	3.28	2.57	1.25	5.23
1 1/2"	3.59	2.73	1.48	5.23
2"	4.17	3.43	1.95	7.80

Materials

No.	Part	Material	
1	Nut	Steel	
2	Handle	Steel	
3	Stem Gland Screw	Brass	
4	Stem Packing	Teflon	
5	Stem	Brass	
6	Body 1/2" - 1 1/2" 2"	Forged Brass Cast Brass	
7	Ball Disc Packing	Teflon	
8	Ball	Chrome Plated Brass	
9	End Plug	Forged Brass	

SUBMITTAL INFORMATION

- 600 WOG, 150 WSP (Padlock not included)
- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
- Threads conform to ANSI B1.20.1
- Blow out proof stem



Non-Potable Use Only

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.

P.O. Box 508

Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737 Fax: 1-800-832-9296

Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 10-13