



SUBMITTAL DATA SHEET

PVC Valves PVC Union – 2070S

Solvent



A.Y. McDonald Mfg. Co. PVC/CPVC Ball Valves & Fittings feature convenience of operation with excellent flow characteristics. Use these sturdy valves for water supply in residential, commercial, and industrial applications.

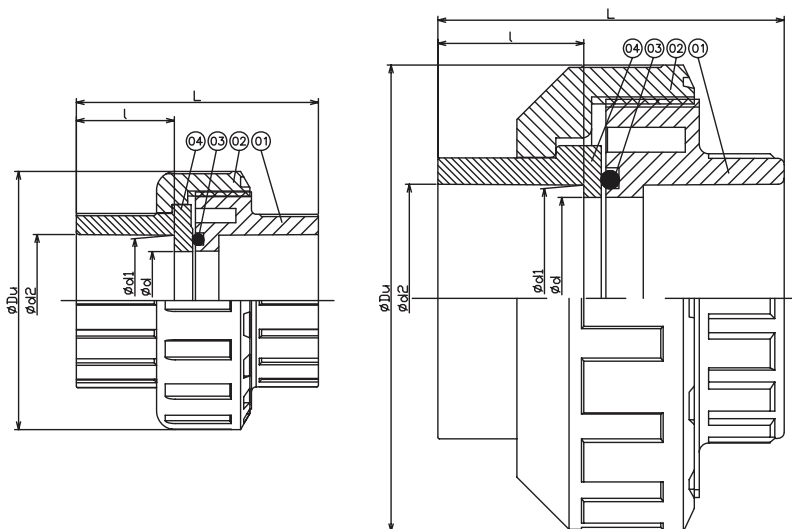

Dimensions

Size	L	ød	øDu
1/2"	2.16	.59	2.07
3/4"	2.51	.78	2.40
1"	2.83	.98	2.79
1 1/4"	3.03	1.25	3.26
1 1/2"	3.38	1.57	3.77
2"	3.74	1.96	4.56

Materials

No.	Part	Material
1	Body	PVC
2	Union Nut	PVC
3	O-ring	EPDM
4	Union End	PVC

SUBMITTAL INFORMATION

- Schedule 80
- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
- Fits schedule 40 & 80 PVC pipe

Temperature Ratings:

- 150 PSI at 73°F
- 50 PSI at 140°F

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: