
# SUBMITTAL DATA SHEET

## NL Ball Style Curb Stop – 74606BG

G CTS Compression x FNPT

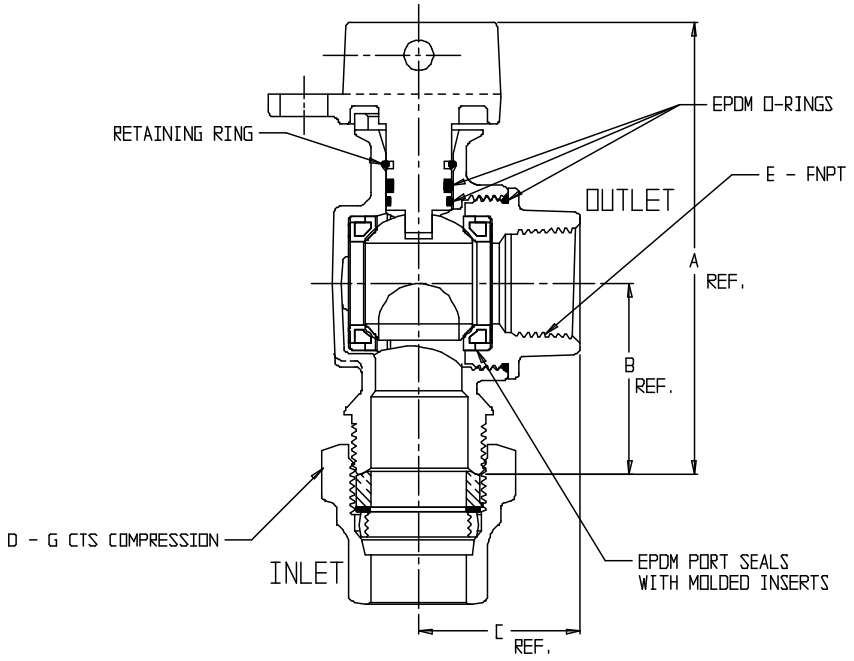


| SIZE | A | B | C | D | E |
|---|---|---|---|---|---|
| 3/4 | 4.22 | 1.78 | 1.50 | 3/4 | 3/4 |
| 1 | 4.89 | 2.25 | 1.75 | 1 | 1 |
| 2 | 6.92 | 3.22 | 2.84 | 2 | 2 |

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections

**A.Y. McDonald Mfg. Co.**
P.O. Box 508
Dubuque, IA 52004-508

**Toll Free:** 1-800-292-2737
**Fax:** 1-800-832-9296
**Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**