## SUBMITTAL DATA SHEET


NL Ball Style Curb Stop – 76102W-22

-22 CTS Compression x FNPT



MODEL	SIZE	A	В	С	D	E
76102W-22	3/4 X 5/B X 3/4	2,95	.63	2.31	3⁄4	3/4
76102W-22	1 X 5⁄8 X 3⁄4	3.58	.63	2.31	1	3/4
75102W-22	3⁄4	3.24	.75	2,42	3⁄4	3⁄4
76102W-22	3⁄4 X 4,06	4.05	. 75	2,42	3⁄4	3⁄4
76102W-22	3⁄4 X 3⁄4 X l	3.3B	.75	2.42	3⁄4	1
76102W-22	1 X 3⁄4 X 3⁄4	3.22	.75	2,42	1	3/4
75102W-22	1 X 3⁄4 X I	3.38	. 75	2.42	1	1
76102W-22	1	3.76	1.00	2.64	l	1
76102W-22	1 1/4 X 1 X 1	4.18	1.00	2.64	1 1/4	1
76102W-22	1 1/4 X 1 X 1 1/4	4,32	1.00	2.64	l 1/4	1 1⁄4
76102W-22	l 1/4	4,94	1.25	2.94	1 1/4	1 1/4
76102W-22	l 1/2	5.47	1.50	3,40	1 1/2	1 1/2
76102W-22	2	5.80	2.00	3.71	2	2

## DRAWING MAY NOT RESEMBLE ACTUAL VALVE CONFIGURATION

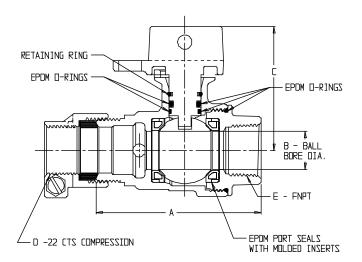

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.** P.O. Box 508 Dubuque, IA 52004-508 **Toll Free:** 1-800-292-2737 **Fax:** 1-800-832-9296 **Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

## Submitted by: