
## **SUBMITTAL DATA SHEET**


Brass Low Pressure Gas Valve - Plug Style - Gas Only Lockwing Less Check – 10621



Inlet: FNPT Thread, Outlet: FNPT Thread

Brass body and plug manually operated low pressure natural or propane gas valve for use indoors on house piping system between the meter oulet and the inlet connection of the gas appliance at ambient temperatures of 32 to 125 degrees Fahrenheit.



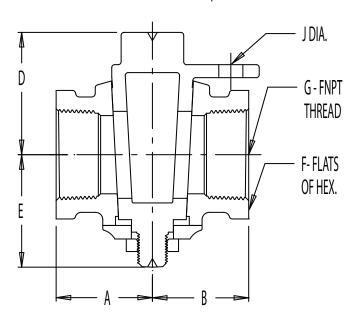

Dimensions									
Size	А	В	С	D	Е	F	G	Н	J
1/2"	.97	.97	.69	1.55	1.24	1.10	1/2	.31	.44
3/4"	1.15	1.15	.81	1.86	1.52	1.31	3/4	.31	.50
1"	1.48	1.48	1.00	2.22	1.78	1.53	1	.50	.50
1 1/4"	1.75	1.75	1.16	2.53	2.03	2.06	1 1/4	.53	.50
1 1/2"	2.00	2.00	1.30	2.54	2.33	2.31	1 1/2	.61	.50
2"	2.53	2.53	1.75	3.24	2.91	2.78	2	.75	.50

## SUBMITTAL INFORMATION

- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
- 25 PSIG



- NOTE: All A.Y. McDonald plug style gas valves are factory set. DO NOT TAMPER WITH BOTTOM NUT.

WARNING: It is unlawful in CALIFORNIA & VERMONT (effective 1/1/2010); MARYLAND (effective 1/1/2012); LOUISIANA (effective 1/1/2013) and the UNITED STATES OF AMERICA (effective 1/4/2014) to use THIS PRODUCT in the installation or repair of any public water system or any plumbing in a facility or system that provides water for human consumption. The wetted surface area of THIS PRODUCT has a weighted average lead content greater than 0.25%.



A.Y. McDonald Mfg. Co. P.O. Box 508 Dubuque, IA 52004-0508 Toll Free: 1-800-292-2737 Fax: 1-800-832-9296 Hours: 7:00 a.m. - 5:00 p.m., CST sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.