

SUBMITTAL DATA SHEET


NL Ball Style Meter Stop - 76100M-22





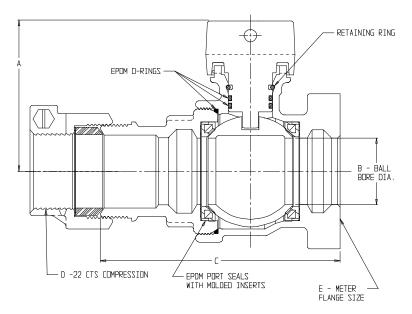

| MODEL | SIZE | A | В | С | D | Е |
|-----------|-------|------|------|------|-------|------------|
| 76100M-22 | 1 1/2 | 3.40 | 1.50 | 5.43 | 1 1/2 | 1 1/2 |
| 76100M-22 | 2 | 3.70 | 2.00 | 6.32 | 2 | 1 1/2 OR 2 |



| MODEL | SIZE | А | В | С | D | E |
|-----------|-----------------|------|------|------|-------|----------------|
| 76100M-22 | 3/4 X 5/8 X 5/8 | 2.29 | . 62 | 3.22 | 3/4 | 5/8 |
| 76100M-22 | 3/4 X 5/8 X 3/4 | 2.29 | .62 | 3.24 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100M-22 | 3/4 | 2.39 | . 75 | 3.52 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100M-22 | 1 X 3/4 X 3/4 | 2.39 | . 75 | 3.56 | 1 | 5/8 X 3/4, 3/4 |
| 76100M-22 | 1 X 3/4 X 1 | 2.39 | .75 | 3.65 | 1 | 1 |
| 76100M-22 | 1 | 2.65 | 1.00 | 4.47 | 1 | l |
| 76100M-22 | 1 1/4 X 1 X 1 | 2.65 | 1.00 | 4.77 | 1 1/4 | 1 |

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co.

P.O. Box 508

Dubuque, IA 52004-508

Toll Free: 1-800-292-2737 Fax: 1-800-832-9296

Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 09-14