

JOB NAME

ITEM NO.


SUBMITTED AS SHOWN

SUBMITTED AS NOTED

SEE ATTACHED FOR
SUBMITTED MODIFICATION



ADA APPLIES
TO VALVE
CONTROLS ONLY

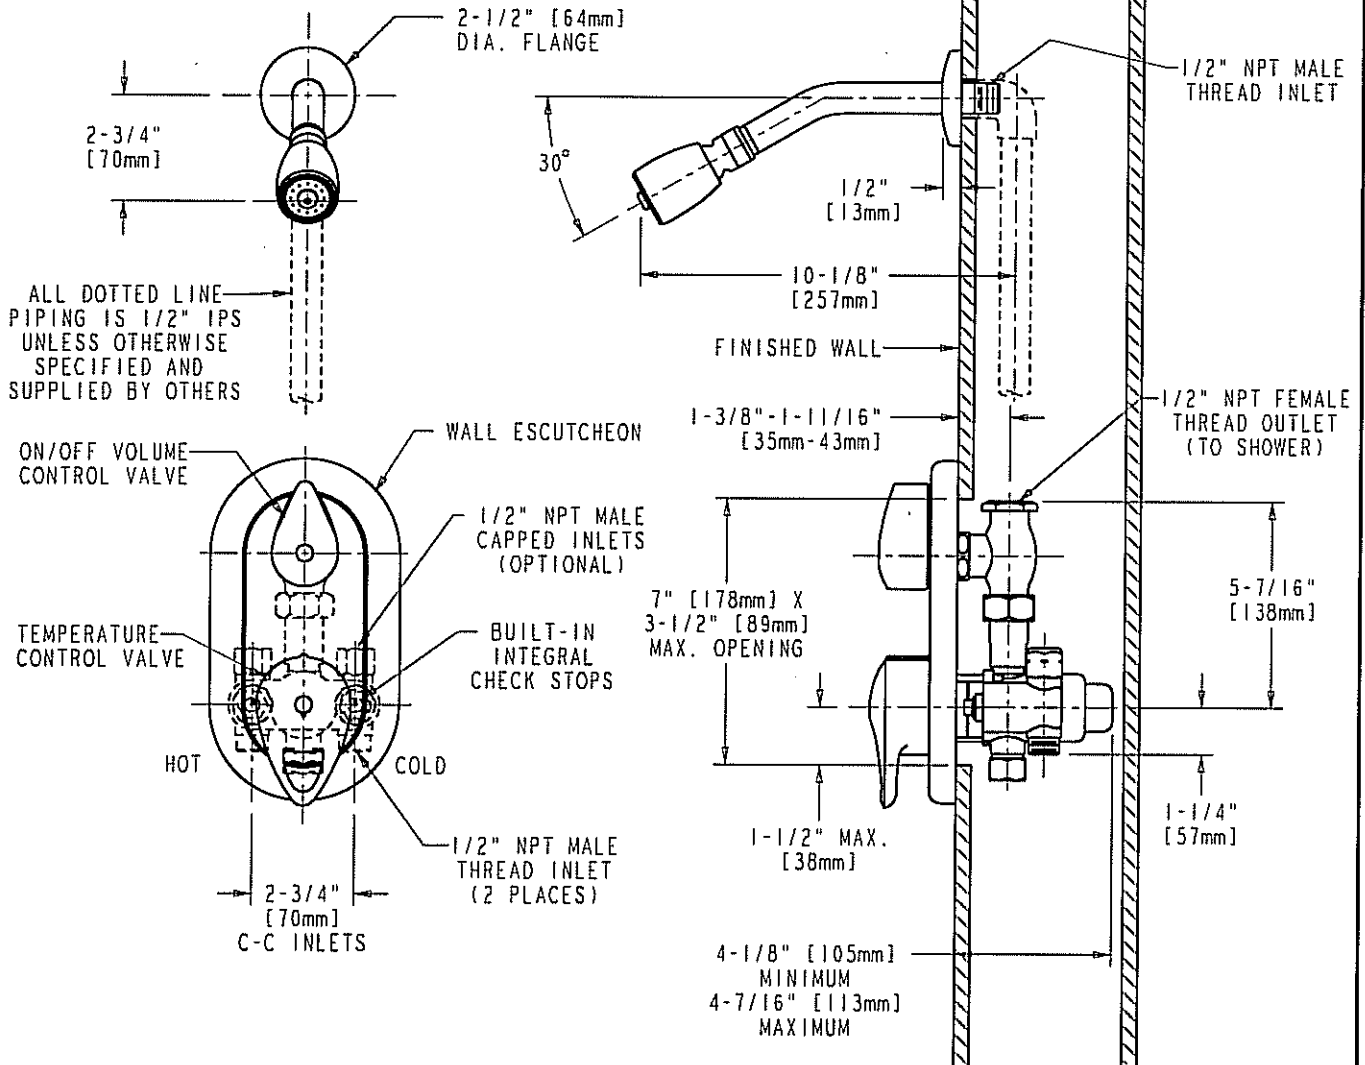

DIMENSIONS IN INCHES AND [MILLIMETERS].

TECHNICAL DATA

- TEMPSHIELD™ BUILT-IN SHOWER FITTING
- COMBINATION THERMOSTATIC/PRESSURE BALANCING VALVE
- INTEGRAL CHECK/SERVICE STOPS
- 620 SHOWER HEAD 2.5 GPM [9.5 L/min. @ 80 PSI]
- HOT WATER LIMIT STOP, 112°F [44°C] FACTORY SETTING
- FINISH: CHROME PLATE

- QUATURN UNIT IN VOLUME CONTROL VALVE
- ASME A112.18.1M COMPLIANT
- CSA B125 COMPLIANT
- ASSE 1016 APPROVED

DATE: 09-21-04

BY: JAR

CHK'D: *JAR*

APP'D: *ST*

REV: A

2502