ROUGHING IN DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA.

CHICAGO FAUCETS®
a Geberit company

2100 South Clearwater Drive
Des Plaines, IL 60018
Phone: 847-803-5000
Fax: 847-803-5454
www.chicagofaucets.com

FOR TECHNICAL ASSISTANCE
1-800-TEC-TRUE (1-800-832-8783)


ROUGH-IN

FITTING NO.	
923-219375AB	
BY: SID	DATE: 06-13-18
SUBMITTED MODEL NO.	
CHK:	REV:

SUBMITTED AS SHOWN		SUBMITTED AS NOTED		SEE ATTACHED FOR SUBMITTED MODIFICATION	

JOB NAME

ITEM NO.

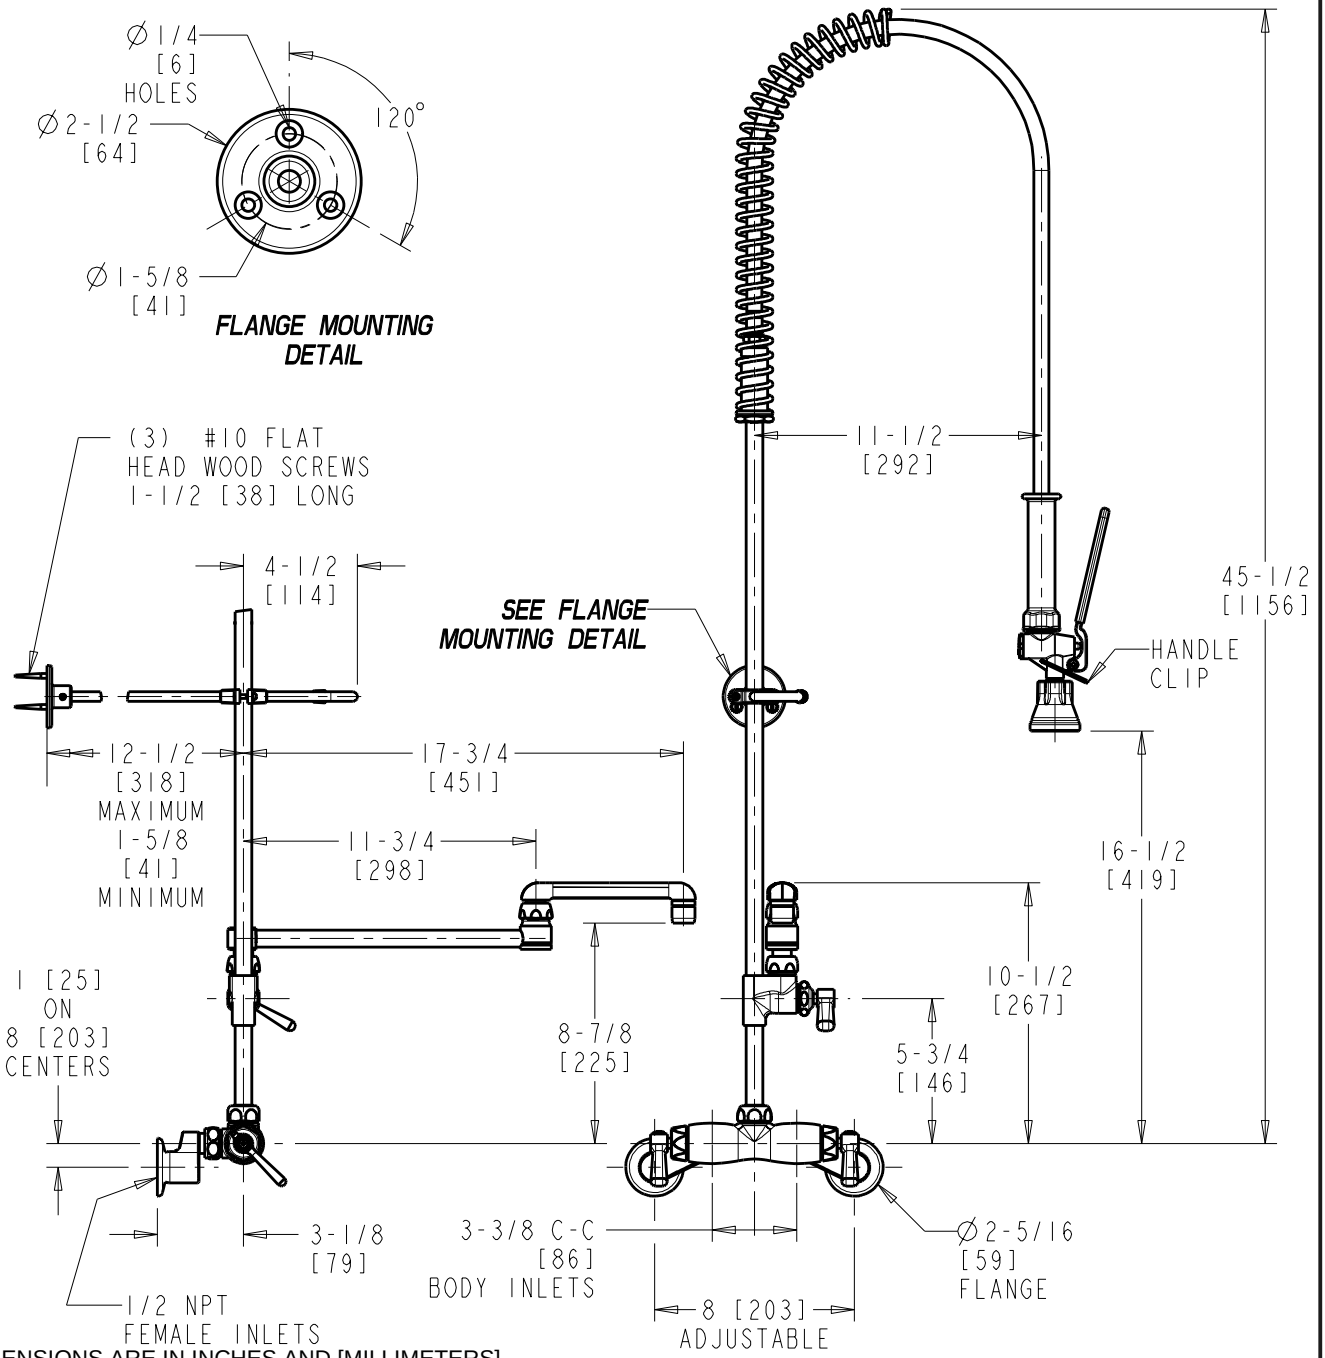

DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

TECHNICAL DATA

- WALL MOUNTED PRE-RINSE
- 613-A PRE-RINSE ADAPTA FAUCET
- DJ18 DOUBLE JOINTED SWING SPOUT WITH E29 OUTLET
- 369 INDEXED LEVER HANDLES
- QUATURN OPERATING CARTRIDGES
- "HC" 2 1/2" OFFSET INLET SUPPLY ARMS WITH INTEGRAL CHECK
- 23" RISER WITH SPRING GUIDE
- FINISH: CHROME PLATE
- 90-HAB HOSE REEL PRE-RINSE SPRAY VALVE
- 2.5 GPM [9.5 L/min.] MAXIMUM FLOW RATE
- 44" FLEXIBLE S.S. HOSE WITH INSULATED HANDLE
- INTEGRATED PIPE SUPPORT AND HOOK ASSEMBLY
- ASME A112.18.1/CSA B125.1 COMPLIANT
- MEETS THE LEAD CONTENT REQUIREMENTS OF: CALIFORNIA, VERMONT AND NSF/ANSI 372
- COMPLIANT TO NSF/ANSI 61, SECTION 9