

## 802-VE2805CP

Deck Mounted Lavatory Faucet with 4" Integral Spout

### PRODUCT TYPE

Deck mounted lavatory faucet with 4" integral spout

### FEATURES & SPECIFICATIONS

- Polished chrome plated finish
- Solid brass body construction
- 4" C-C Integral spout
- .5 GPM (1.9 L/min) pressure compensating vandal resistant outlet projects a conical spray pattern, catalog #E2805
- 2 1/2" Curved metal handles with eight point tapered broach, secured color coded index buttons, catalog #390
- Quaturn™ quarter-turn renewable compression cartridge that closes with water pressure with tapered square broach to facilitate handle removal, catalog #1-100XT and 1-099XT
- 1/2" NPSM supply inlets with coupling nuts for 3/8" or 1/2" flexible risers
- Mounting hardware included

### PERFORMANCE SPECIFICATION

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140° F

### WARRANTY

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

### COMPLIANT To

- ASME A112.18.1M
- CSA B125
- NSF 61, Sec. 9
- ADA

Job Name \_\_\_\_\_  
Item Number \_\_\_\_\_  
Section/Tag \_\_\_\_\_  
Model Specified \_\_\_\_\_  
Architect \_\_\_\_\_  
Engineer \_\_\_\_\_  
Contractor \_\_\_\_\_  
☐ Submitted as Shown ☐ Submitted with Variations  
Date \_\_\_\_\_



# 802-VE2805CP


Deck Mounted Lavatory Faucet with 4" Integral Spout

**CHICAGO  
FAUCETS**

a Geberit company

## ARCHITECT/ENGINEER SPECIFICATION

Chicago Faucets No. 802-VE2805CP, Polished chrome plated solid cast brass body construction with integral 4" C-C spout and integral inlet shanks on 4" centers. 0.5 GPM pressure compensating vandal resistant aerator outlet projects conical spray pattern. 2 1/2" Curved metal lever handles with eight point tapered broach. Secured color coded index buttons. Quatum™ quarter-turn renewable compression cartridge designed to close with water pressure with square tapered broach feature to help facilitate handle removal. Inlet shanks contain standard 1/2" NPSM threaded inlets with coupling nuts for connection to 3/8" or 1/2" standard flexible risers. Mounting hardware included. This product meets ADA requirements and is tested and certified to industry standards: ASME A112.18.1, NSF 61, Sec. 9 and CSA B125.

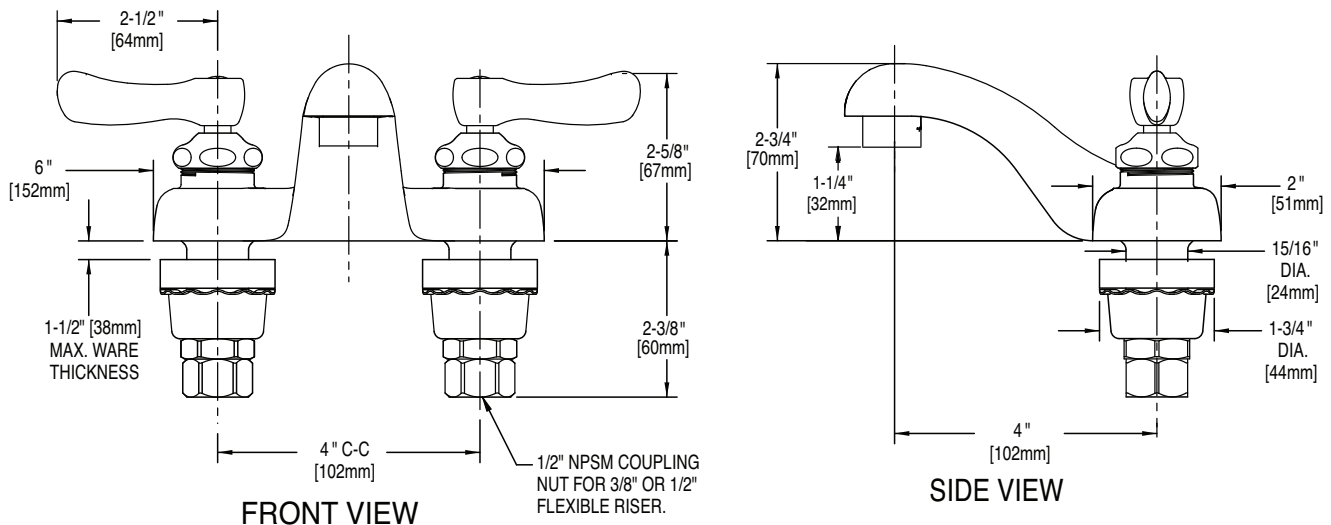

## OPERATION AND MAINTENANCE

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning this product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at [www.chicagofaucets.com](http://www.chicagofaucets.com).

Chicago Faucets, a member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports, and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive  
Des Plaines, IL 60018  
P: 847/803-5000  
F: 847/803-5454  
Technical: 800/TEC-TRUE  
[www.chicagofaucets.com](http://www.chicagofaucets.com)