

# PRODUCT DATA SHEET




## Extreme Duty Food Grade Grease, 14 Wt Oz

No. SL35615 | Item# 1007931 | Case# 1007930

| | |
|---|---|
| Product Description | An NSF H1 registered, NLGI #2 high performance lubricating grease used where incidental contact with food is a possibility. It also excels in applications where resistance to water washout and broad operating temperatures are absolutely necessary. |
| Applications | Food processing & handling equipment, breweries, canneries, carton/packaging equipment, dairies, & meat processing plants |
| Unit Package Description | 14 Ounce Cartridge |
| Brand | CRC |
| Generic Description 1 | Extreme Duty Food Grade Grease |
| Net Fill | 14 Wt Oz |
| UPC Code | 072213356151 |
| Unit Dimensions | 9.25H x 2.2W x 2.2D in |
| Units Per Case | 10 |
| Case Dimensions | 9.5H x 4.5W x 11.38D in |
| Cases Per Pallet | 150 |
| Case Weight | 9 lbs |
| I 2 of 5 Code | 30072213356152 |
| Appearance | Tan, Smooth Grease |
| Base Type | Calcium Sulfonate |
| Flash point (F) | 428°F |
| Flash point (C) | 220°C |
| Flammability Class - CPSC | Combustible |
| Spec Gravity Concentrate | 0.95 to 1.05 |
| NLGI Grade | 2 |
| Timken OK Load Lbs. | 65 Lbs |
| Plastic Safe | Yes |
| Evaporation Rate | Very Slow |
| Working Temp (F) | -20 to 400°F |

Last revised: 11/30/2017

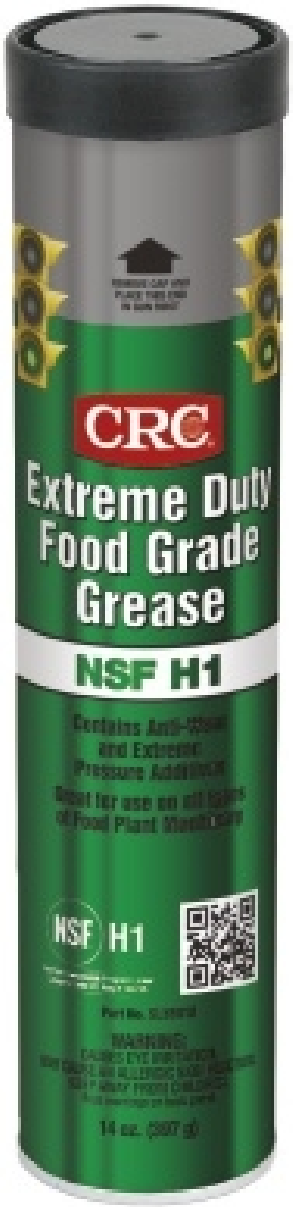

Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.

CRC ISO 9001:2008 CERTIFIED

CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



# PRODUCT DATA SHEET




| | |
|---|---|
| Working Temp (C) | -4 to 204.44°C |
| 4 Ball EP | 620 |
| 4 Ball Wear | 0.45 Max |
| Drop Point | 572°F |
| Leakage | 0.4 |
| Low Temp Torque | <5,000 |
| Oil Separation | 0.2 |
| Oxidation Stability | 1 |
| Pour Point (F) | 10.4°F |
| Pour Point (C) | -12°C |
| Water Washout | 2.75 |
| Worked Penetration | 265 to 295 |
| Propellant | None |
| NSF Category Code | H1 |
| NSF Number | 144236 |
| DOT Proper Shipping Name | Not Regulated |
| VOC % (Consumer Product def) | 0 |
| VOC g/L (Consumer Product def) | 0 |
| VOC lbs/gal (Consumer Prod def) | 0 |
| VOC Category | Not Regulated |
| Removal (How To) | Remove with a degreaser. |

Last revised: 11/30/2017



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

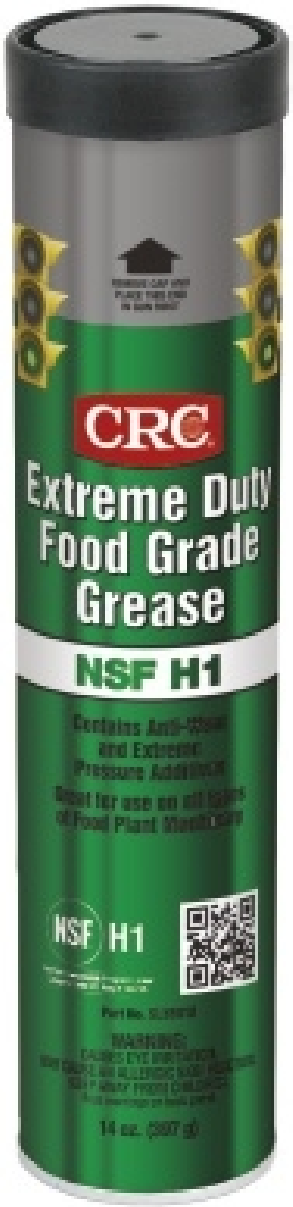CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.

CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.