




PRODUCT DATA SHEET

Brake Caliper Synthetic Grease, 8 Oz

No. 05359 | Item# 1003791 | Case# 1003790

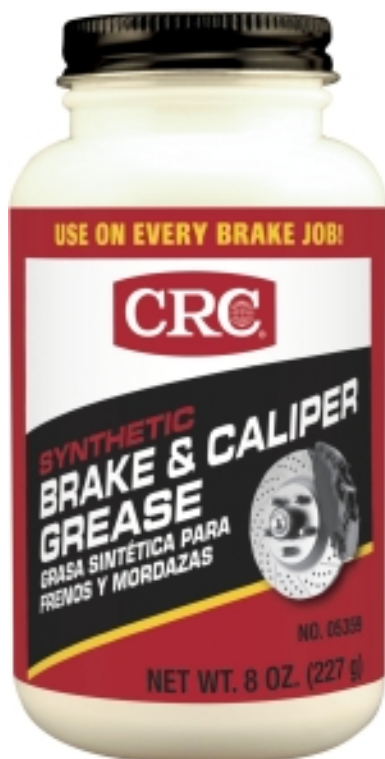

Product Description

A specially developed synthetic grease with a high-tech formula for use in disc & drum brake systems. High temperature grease is plastic & rubber safe. Use on metal to metal contact points and sliding surfaces. Resists moisture and will not washout.

Applications

Backing plates, brake pad contact points, caliper o-rings, calipers, disc brake pads, drum brake systems, grommets, parking brake areas of lubrication, pivot points, self adjusters

Unit Package Description

8 Ounce Bottle

Brand

CRC

Generic Description 1

Brake Caliper Synthetic Grease

Net Fill

8 Fl Oz

UPC Code

078254053592

Unit Dimensions

4.25H x 2.5W x 2.5D in

Units Per Case

6

Case Dimensions

4.9H x 4.3W x 7.25D in

Cases Per Pallet

238

Case Weight

4 lbs

I 2 of 5 Code

30078254053593

Appearance

Black Semi-Solid Grease

Base Type

Synthetic base with Molybdenum Disulfide, PTFE and Graphite

Flash point (F)

450°F

Flash point (C)

232°C

Flammability Class - CPSC

None

Spec Gravity Concentrate

0.89

NLGI Grade

2

Timken OK Load Lbs.

50 Lbs

Plastic Safe

Yes

Evaporation Rate

Slow

Last revised: 11/30/2017
Page 1 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



PRODUCT DATA SHEET

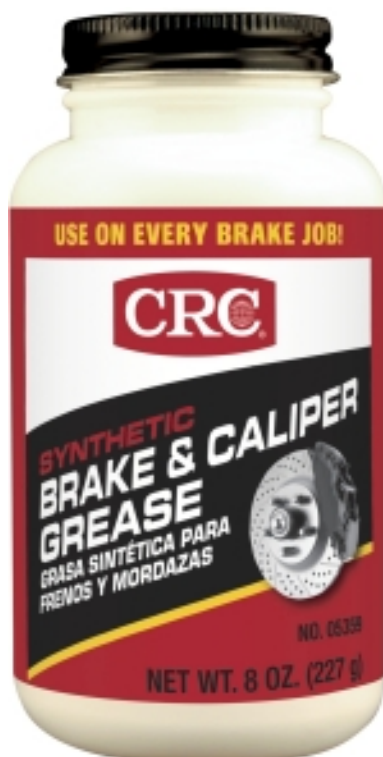

Working Temp (F)	-30 to 600°F
Working Temp (C)	-45.5 to 232°C
4 Ball EP	Not Determined
4 Ball Wear	0.67 mm
Drop Point	>600°F
Leakage	None
Oil Separation	Not Determined
Oxidation Stability	<5 Lbs
Pour Point (F)	-20°F
Pour Point (C)	-29°C
ISO Viscosity Grade	Not Determined
Water Washout	1.7
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
VOC % (Consumer Product def)	0.58
VOC g/L (Consumer Product def)	5.62
VOC lbs/gal (Consumer Prod def)	0.04
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

Last revised: 11/30/2017
Page 2 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.

CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.