



PRODUCT DATA SHEET

Dry PTFE Lube, 10 Wt Oz

No. 03044 | Item# 1003302 | Case# 1003301



Product Description	Contains PTFE, the advanced Dry Film lubricant technology from DuPont®. Penetrates and bonds to most surfaces. Prevents sticking, reducing friction and wear and is highly resistant to oil, dust and dirt build-up. NSF H2 Registered.
Applications	Hinges, locks, catches, pulleys, conveyors, machine parts, chutes & slides, coin mechanisms, window guides, drawers, rollers, control buttons, switches, electrical wires & harnesses.
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	Dry Film Lubricant
Net Fill	10 Wt Oz
UPC Code	078254030449
Unit Dimensions	7.75H x 2.63W x 2.63D in
Units Per Case	12
Case Dimensions	8.1H x 8.3W x 11.1D in
Cases Per Pallet	133
Case Weight	11 lbs
I 2 of 5 Code	30078254030440
Appearance	Hazy White Suspension in Liquid
Base Type	PTFE
Flash point (F)	<20°F
Flash point (C)	<-7°C
Flammability Class - CPSC	Flammable
Spec Gravity Concentrate	0.73
Plastic Safe	Yes
Film Type	Micro-Thin and Dry
Film Thickness	0.05 to 0.1 Mil
Evaporation Rate	Fast

Last revised: 11/28/2017
Page 1 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



PRODUCT DATA SHEET



Working Temp (F)	-40 to 450°F
Working Temp (C)	-40 to 232.2°C
Propellant	Hydrocarbon
NSF Category Code	H2
NSF Number	121621
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Consumer Product def)	98
VOC g/L (Consumer Product def)	715.4
VOC lbs/gal (Consumer Prod def)	5.96
VOC Category	Dry Film Lubricant
Removal (How To)	Remove with IPA or hexane if wet; hard rubbing when dry.

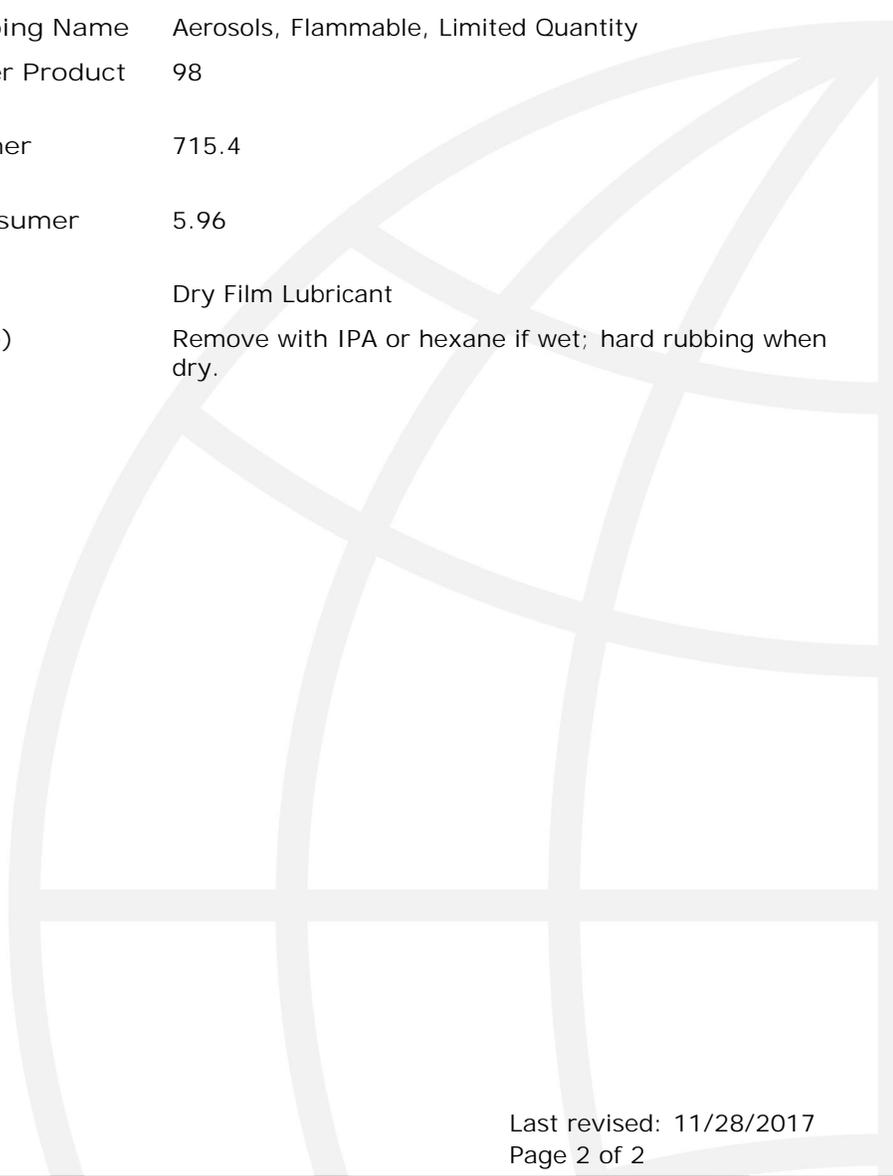

Last revised: 11/28/2017
Page 2 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.