




PRODUCT DATA SHEET

Lithium General Purpose Grease, 14 Wt Oz

No. SL3310 | Item# 1007904 | Case# 1007903

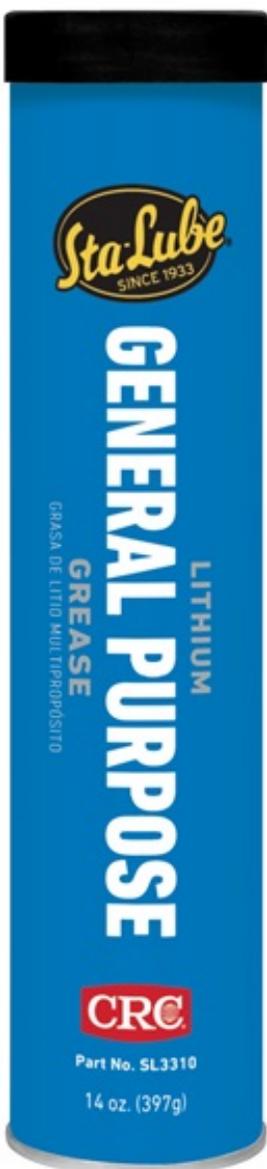

| | |
|---------------------------|--|
| Product Description | A high purity, NLGI Grade 2 lithium based grease. Provides superior lubrication & durability in any weather and most temperatures. It is a versatile grease designed for light duty applications requiring a long grease life. Will not break down or run out. |
| Applications | Hinges, latches, overhead door tracks, open gears, chains, cables, slide conveyors, guide rails, cams, pistons, machinery, tools, & equipment. A break-in lubrication for bearings. |
| Unit Package Description | 14 Ounce Cartridge |
| Brand | Sta-Lube |
| Generic Description 1 | Lithium General Purpose Grease |
| Net Fill | 14 Wt Oz |
| UPC Code | 072213331004 |
| Unit Dimensions | 9.31H x 2.13W x 2.13D in |
| Units Per Case | 10 |
| Case Dimensions | 9.5H x 4.5W x 11.38D in |
| Cases Per Pallet | 150 |
| Case Weight | 11 lbs |
| I 2 of 5 Code | 30072213331005 |
| Appearance | Amber Semi-Solid to Solid Grease |
| Base Type | Lithium-12 |
| Flash point (F) | >302°F |
| Flash point (C) | >150°C |
| Flammability Class - CPSC | None |
| Spec Gravity Concentrate | 0.9 at 60°F |
| NLGI Grade | 2 |
| Timken OK Load Lbs. | Not Determined |
| Plastic Safe | Not Determined |
| Evaporation Rate | Slow |

Last revised: 11/30/2017
Page 1 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



PRODUCT DATA SHEET

| | |
|---------------------------------|---|
| Working Temp (F) | 0 to 250°F |
| Working Temp (C) | -18 to 121°C |
| 4 Ball EP | Not Determined |
| 4 Ball Wear | Not Determined |
| Drop Point | 350°F |
| Elastomer Compatibility | Not Determined |
| Leakage | Not Determined |
| Low Temp Torque | Not Determined |
| Oil Separation | <10% |
| Oxidation Stability | 5 |
| Pour Point (F) | -15°F |
| Pour Point (C) | -26°C |
| ISO Viscosity Grade | 150 |
| Water Washout | <15% |
| Worked Penetration | 265 to 295 |
| Propellant | None |
| DOT Proper Shipping Name | Not Regulated |
| VOC % (Consumer Product def) | Not Determined |
| VOC g/L (Consumer Product def) | Not Determined |
| VOC lbs/gal (Consumer Prod def) | Not Determined |
| VOC Category | Not Regulated |
| Removal (How To) | Remove with a degreaser or brake cleaner product. |

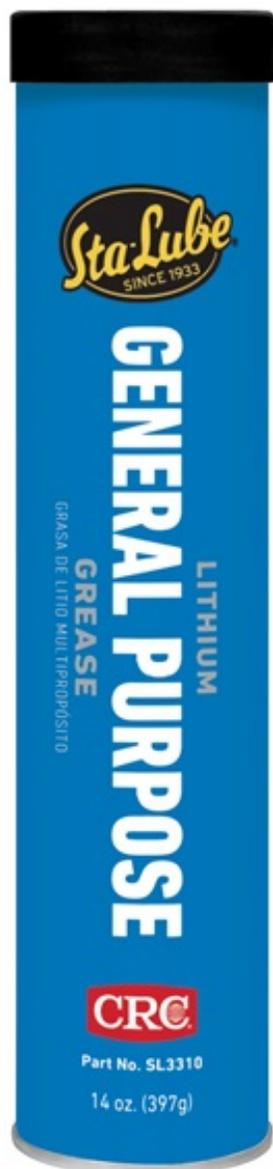

Last revised: 11/30/2017
Page 2 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.