




PRODUCT DATA SHEET

Super White™ Multi-Purpose Lithium Grease, 1.75 Wt Oz
No. SL3361 | Item# 1007918 | Case# 1007917

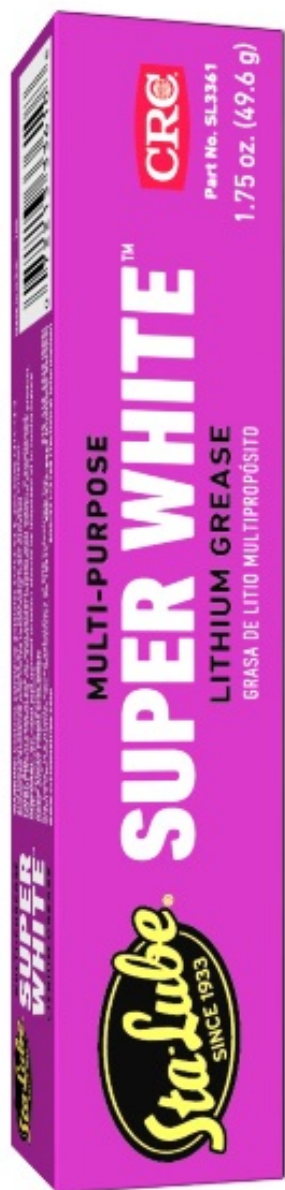

Product Description

A high purity, NLGI Grade 1.5 multi-purpose white lithium grease. Provides superior lubrication & durability in any weather and most temperatures. Bright white in color. Ideal for when appearance is important.

Applications

Assembly lubes, bearings, break-in lubrication for bearings, cables, chains, chassis points, conveyor bearings, door tracks, garage door channels & openers, hinges, latches, machinery, open gears, overhead door tracks, roller bearings, sleeve bearings.

Unit Package Description

1.75 Ounce Squeeze Tube

Brand

Sta-Lube

Generic Description 1

White Lube

Net Fill

1.75 Wt Oz

UPC Code

072213336108

Unit Dimensions

1.19H x 1.44W x 7.06D in

Units Per Case

24

Case Dimensions

7.63H x 6.38W x 7.5D in

Cases Per Pallet

185

Case Weight

4 lbs

I 2 of 5 Code

30072213336109

Appearance

White Semi-Solid to Solid Grease

Base Type

Lithium-12

Flash point (F)

475°F

Flash point (C)

246°C

Flammability Class - CPSC

None

Spec Gravity Concentrate

0.9 at 60°F

NLGI Grade

1.5

Timken OK Load Lbs.

25 Lbs

Plastic Safe

Not Determined

Evaporation Rate

<0.01 (Butyl Acetate=1)

Last revised: 2/20/2018
Page 1 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



PRODUCT DATA SHEET

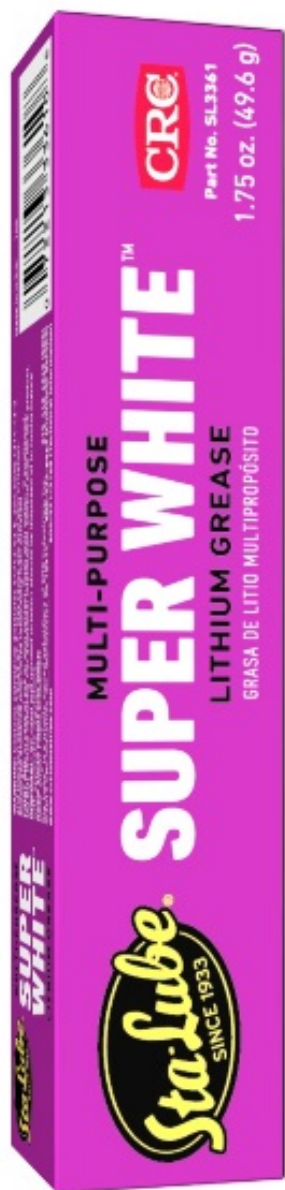

Working Temp (F)	0 to 300°F
Working Temp (C)	-17.8 to 148.9°C
Drop Point	350°F
Leakage	5
Oil Separation	5
Oxidation Stability	10
Pour Point (F)	0°F
Pour Point (C)	-17.78°C
ISO Viscosity Grade	165
Water Washout	10
Worked Penetration	285 to 295
Propellant	None
NSF Category Code	H2
NSF Number	147593
DOT Proper Shipping Name	Not Regulated
VOC % (Consumer Product def)	<0.1
VOC g/L (Consumer Product def)	<0.9
VOC lbs/gal (Consumer Prod def)	<0.01
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

Last revised: 2/20/2018
Page 2 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.

CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.