




SLM : LED Slim Panel



1'x4'



2'x2'

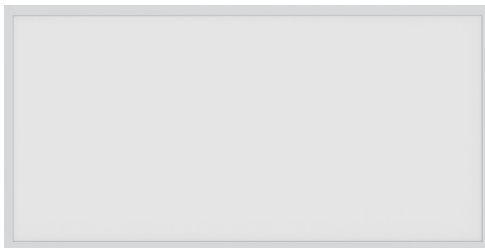

2'x4'

project name	type
catalog number	
comments	voltage
approved by	date



Features

- Ultra slim modern design with smooth uniform light guide lens
- Edge-lit waveguide lens provides impressive visual comfort
- One for one alternative LED solution to fluorescent troffers
- High efficiency LEDs light the panel evenly
- Extremely shallow depth is ideal for shallow plenum spaces
- Up to 47% energy savings compared to traditional fluorescent troffers and 2½ times longer life
- Features pre-installed integral earthquake clips
- Universal input voltage (100-277V) dimmable power supply (0-10V)
- Available in 1'x4', 2'x2' and 2'x4'
- Fits standard T-bar and narrow grid drop ceilings
- 5 year limited warranty

Performance

- 1'x4': 3750lm @ 30W
- 2'x2': 3000-5000lm @ 30/40W
- 2'x4': 4000-6250lm @ 40/50W
- 50,000 hours (L70) life
- -4°F to 104°F (-20°C to +40°C) operating temperature
- UL listed for dry/damp locations
- 3500K, 4000K, 5000K CCT
- CRI: > 80
- Input voltage: 120-277V
- Power Factor: > 90
- THD < 15%


Applications

- Conference rooms
- Retail
- Offices
- Hospitality
- Healthcare
- Schools
- Reception areas
- Corridors
- Foyer



SLM : LED Slim Panel

Dimensions

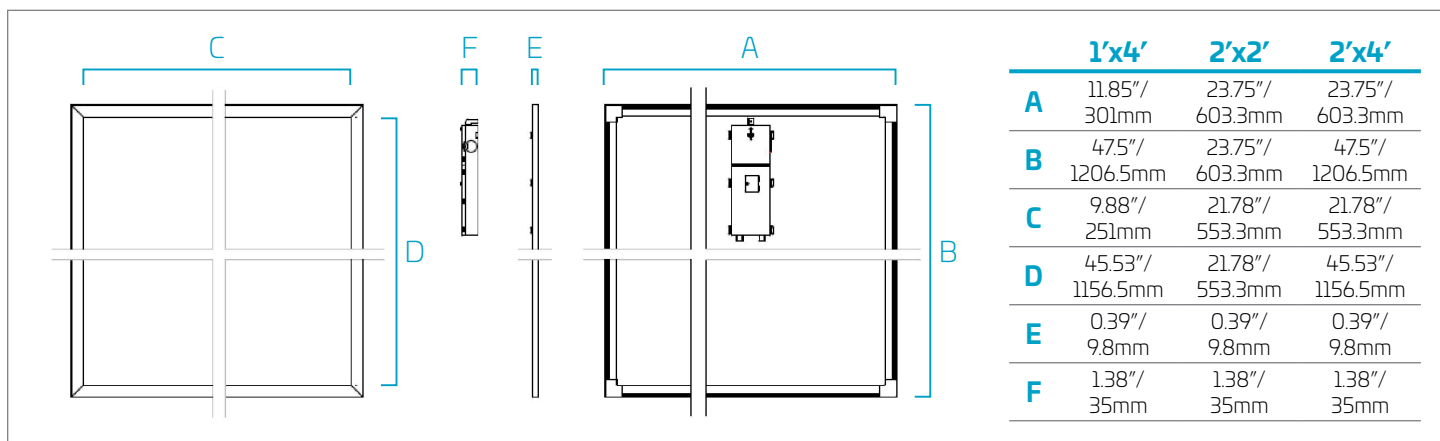

Ordering Information

Order Code	Item #	Size	Lm	W	CCT	CRI	Life/Hrs	V	Dimming	DLC Premium
09760	SLM14-4CB-35K-U	1'x4'	3,750	30W	3500K	80+	50,000	100-277V	0-10V	✓
09761	SLM14-4CB-40K-U	1'x4'	3,750	30W	4000K	80+	50,000	100-277V	0-10V	✓
09762	SLM14-4CB-50K-U	1'x4'	3,750	30W	5000K	80+	50,000	100-277V	0-10V	✓
09763	SLM22-4CB-35K-U	2'x2'	3,750	30W	3500K	80+	50,000	100-277V	0-10V	✓
09764	SLM22-4CB-40K-U	2'x2'	3,750	30W	4000K	80+	50,000	100-277V	0-10V	✓
09765	SLM22-4CB-50K-U	2'x2'	3,750	30W	5000K	80+	50,000	100-277V	0-10V	✓
09754	SLM22-5CB-35K-U	2'x2'	4,841	40W	3500K	80+	50,000	100-277V	0-10V	✓
09755	SLM22-5CB-40K-U	2'x2'	4,894	40W	4000K	80+	50,000	100-277V	0-10V	✓
09756	SLM22-5CB-50K-U	2'x2'	5,000	40W	5000K	80+	50,000	100-277V	0-10V	✓
09766	SLM24-5CB-35K-U	2'x4'	4,898	40W	3500K	80+	50,000	100-277V	0-10V	✓
09767	SLM24-5CB-40K-U	2'x4'	4,943	40W	4000K	80+	50,000	100-277V	0-10V	✓
09768	SLM24-5CB-50K-U	2'x4'	5,000	40W	5000K	80+	50,000	100-277V	0-10V	✓
09757	SLM24-6CB-35K-U	2'x4'	6,250	50W	3500K	80+	50,000	100-277V	0-10V	✓
09758	SLM24-6CB-40K-U	2'x4'	6,250	50W	4000K	80+	50,000	100-277V	0-10V	✓
09759	SLM24-6CB-50K-U	2'x4'	6,250	50W	5000K	80+	50,000	100-277V	0-10V	✓

✓DesignLights Consortium® Premium Qualified

Accessories (Sold Separately)

Order Code	Litespan Part #	Description
09849	FHSCP-UNV-5WL	5W Emergency Battery Backup
09851	FHSCP-UNV-7.8WL	7.8W Emergency Battery Backup
09850	FHSCP-UNV-10.7WL	10.7W Emergency Battery Backup
09852	FHSCP-UNV-13.7WL	13.7W Emergency Battery Backup
09854	FHSCP-UNV-17WL	17W Emergency Battery Backup

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335