

LED HID Replacement: Small

features

- LED replacement for high wattage HID fixtures from 50W to 100W
- Consumes up to 80% less energy than conventional HID systems
- State-of-the-art LED light sources deliver over 130 lumens per watt
- Lasts 3x longer than metal halide or HPS HID lamps
- Choice of 4000K or 5000K CCT
- Shatter resistant for reduced risk of injury & breakage
- Integral driver, eliminates the need for external driver or ballast
- Environmentally friendly: contains no glass, mercury, or lead
- Suitable for use in totally enclosed fixtures



15-24
watts

1,900-
3,120
lumens

130
lpw

E26
base



RoHS
Compliant



performance

- 4000K, 5000K
- 130 lpw
- 80+ CRI
- 50,000 hour life @ L70
- Direct line voltage 100-277V - not compatible with ballasts
- Power Factor > 0.9
- Non-dimmable
- Universal mounting position
- UL1598C – Existing fixtures retain UL certification
- cULus - damp location rated
- Operating temperature: -40°F to 140°F (-40°C to 60°C)

applications

- Bollards
- Wallpacks
- Downlights



ENCLOSED



CRI (Ra)



INSTANT ON



50,000
LIFETIME HRS




5
YR
WARRANTY



NO
FAN REQUIRED

LED HID Replacement: Small

dimensions

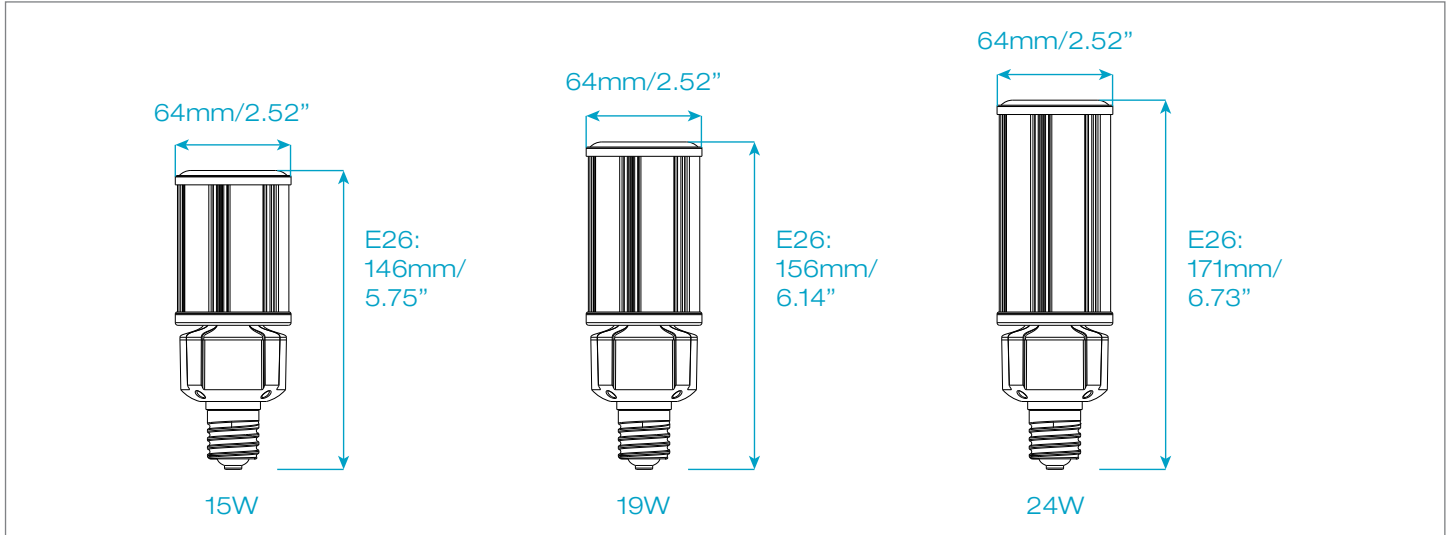

ordering information

Order Code	Item #	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	
09390	LED15WPT40KMED-G7	1,875	15W	4000K	80+	100-277V	50K	E26	50W	✗
09391	LED15WPT50KMED-G7	1,950	15W	5000K	80+	100-277V	50K	E26	50W	✗
09392	LED19WPT40KMED-G7	2,375	19W	4000K	80+	100-277V	50K	E26	70W	✗
09393	LED19WPT50KMED-G7	2,470	19W	5000K	80+	100-277V	50K	E26	70W	✗
09394	LED24WPT40KMED-G7	3,000	24W	4000K	80+	100-277V	50K	E26	100W	✗
09395	LED24WPT50KMED-G7	3,120	24W	5000K	80+	100-277V	50K	E26	100W	✗

NOTE: use order code when ordering.

✗ Lighting Design Lab Qualified

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335