

products

Commercial Sinks





Stainless Steel Sinks That Set The Industry Standard

When you think of commercial grade stainless steel sinks, the name Elkay most likely comes to mind. After all, we've been manufacturing quality stainless steel sinks for nearly a century. And over those years, our engineering and manufacturing methods have continued to evolve ... and have continued to set the industry standard.


From our foodservice and utility sinks, to our lavatory, scrub and hand wash models, Elkay's ongoing commitment to superior quality, styling and functionality is quite evident. Nearly a century of experience at forming, welding, trimming and polishing goes into

every sink we make. And the breadth of our line allows you to select from features, sizes and gauges based on your specific applications and needs. In addition, Elkay stainless steel finishes provide superior bacterial cleanability and are easy to sanitize compared to other sink materials, which is very important in most commercial applications.

From healthcare facilities, schools and stadiums... to restaurants, airports and office buildings, Elkay has the ideal sink for all of the required applications throughout the facility. To find the Elkay sink that's right for you, simply go to the section of this catalog that best describes your type of installation. Our most popular models are identified in large green type.


Table of Contents	Page	
Foodservice	3-7	
Lavatory	8-12	
Scrub and Hand wash	13-24	
Service and Utility	25-30	
Classroom	31-38	
General Use	39-47	
Custom	48-50	
Faucets	51-52	
Fittings / Accessories	53-57	
Scullery Non Standard Hole Configurations	58-59	







Almost 90 years of experience at forming, welding, trimming and polishing goes into every Elkay sink.

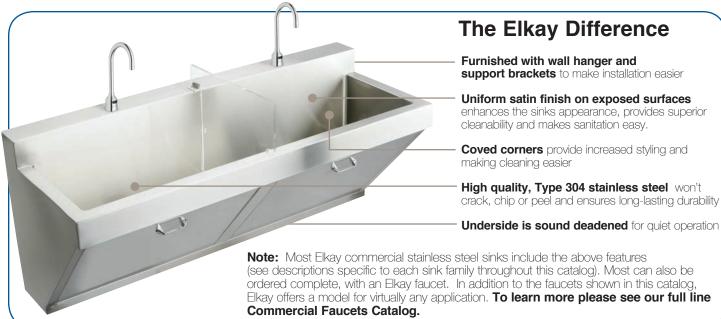







Elkay **Foodservice Sinks** are designed to withstand the heavy-duty requirements of commercial kitchens in schools, hospitals and retirement homes, as well as restaurants. With our large selection of Weldbilt® and Rigidbilt® free-standing scullery sinks, you can count on Elkay to have the right sink for virtually any commercial kitchen application, including food preparation and dish washing.



Weldbilt. Single Compartment Scullery Sinks

- Superior quality 14 gauge, Type 304 stainless steel
- Designed to withstand the heavy duty requirements of hotel, restaurant, cafeteria and other commercial kitchens
- Sink compartments are welded 1/4" radius coved corner construction, ground smooth for easy cleaning
- Channel rim design with 2" apron, slanting sanitary turnunder, and inward sloping rim to minimize spillage
- 8" high, full length sloped backsplash resists grime and is 2" thick to allow for plumbing
- Sink polished to a uniform lustrous satin finish
- Drainboard and sink compartments pitched to drain
- 3-1/2" drain opening centered in each compartment
- Stainless steel tubular legs, 1-5/8" O.D. with up to 1" adjustable bullet shaped stainless steel feet
- Carries NSF International certification









Stainless steel, #14 gauge, Type 304. Specially designed cantilever bracket support. Readily removable without tools. Meets sanitary code requirements. Stock size, 24" long. May be used right or left. Ship Wt. 30 lbs.





WNSF8124L2



WNSF8136R2



WNSF8130LR2



Weldbilt. Double Compartment Scullery Sinks





WNSF8230L2



WNSF82422



WNSF8260R2

	Compartment Size (inches)		Overall Size (inches)		24"	Shipping	
Model Number	Length	Width	Depth	Length	Width	Drainboard	WT. LBS.
		DOUB	LE CON	IPARTM	ENT		
WNSF82302	15	24	14	33	27-1/2	None	95
WNSF8230R2	15	24	14	55-1/2	27-1/2	Right	120
WNSF8230L2	15	24	14	55-1/2	27-1/2	Left	120
WNSF8230LR2	15	24	14	78	27-1/2	Left & Right	200
WNSF82362	18	24	14	39	27-1/2	None	105
WNSF8236R2	18	24	14	61-1/2	27-1/2	Right	130
WNSF8236L2	18	24	14	61-1/2	27-1/2	Left	130
WNSF8236LR2	18	24	14	84	27-1/2	Left & Right	215
WNSF82422	21	24	14	45	27-1/2	None	150
WNSF82482	24	24	14	51	27-1/2	None	120
WNSF8248R2	24	24	14	73-1/2	27-1/2	Right	200
WNSF8248L2	24	24	14	73-1/2	27-1/2	Left	200
WNSF8248LR2	24	24	14	96	27-1/2	Left & Right	225
WNSF82542	27	24	14	57	27-1/2	None	130
WNSF8254R2	27	24	14	79-1/2	27-1/2	Right	215
WNSF8254L2	27	24	14	79-1/2	27-1/2	Left	215
WNSF8254LR2	27	24	14	102	27-1/2	Left & Right	245
WNSF82602	30	24	14	63	27-1/2	None	140
WNSF8260R2	30	24	14	85-1/2	27-1/2	Right	225
WNSF8260L2	30	24	14	85-1/2	27-1/2	Left	225
WNSF8260LR2	30	24	14	108	27-1/2	Left & Right	270

For non-standard hole configuration see pages 58-59.









WNSF8345L4



WNSF83544

For non-standard hole configuration see page 58-59.



WNSF8372R4





RIGIDBILT. Scullery Sinks

- 16 gauge Type 304 stainless steel
- Large die-drawn sink compartments pitched to drain
- Seamless drawn 3-1/2" radius coved corners
- Exposed surfaces blended into a lustrous satin finish
- Steel channel reinforced drainboards have a conical shaped pitch for drainage
- Optional undercoating provides a sound and condensation barrier
- 8" high, full length backsplash with 45° slope top to resist dirt and grime
- Backsplash is 2" thick to allow for plumbing
- Channel rim design with 1" apron, has inward sloping rim to minimize spillage
- 3-1/2" drain opening centered in each compartment
- Stainless steel tubular legs with cross-brace supports, 1-5/8" O.D. with up to 1" adjustable bullet shaped stainless steel feet
- Carries NSF International certification









Model Number	Compart Length		ze (inches) Depth	Overall Si Length	ze (inches) Width	18" Drainboard	Shipping WT. LBS.
		SING	E COM	PARTME	ENT		
RNSF81182	18	24	12-3/4	27	29-3/4	None	89
RNSF8118LR2	18	24	12-3/4	57	29-3/4	Left & Right	127
RNSF81242	24	24	12-3/4	33	29-3/4	None	95
RNSF8124LR2	24	24	12-3/4	63	29-3/4	Left & Right	149
		DOUB	LE COM	1PARTM	ENT		
RNSF82362	18	24	12-3/4	47-1/4	29-3/4	None	129
RNSF8236LR2	18	24	12-3/4	77-1/4	29-3/4	Left & Right	174
RNSF82482	24	24	12-3/4	59-1/2	29-3/4	None	157
RNSF8248LR2	24	24	12-3/4	89-1/4	29-3/4	Left & Right	200
		TRIPL	LE COM	PARTME	NT		
RNSF83544	18	24	12-3/4	67-1/2	29-3/4	None	168
RNSF8354LR4	18	24	12-3/4	97-1/2	29-3/4	Left & Right	211
RNSF83724	24	24	12-3/4	85-1/2	29-3/4	Left	193
RNSF8372LR4	24	24	12-3/4	115-1/2	29-3/4	Left & Right	239

For non-standard hole configuration see page 58-59.





Elkay **Lavatory Sinks** for wash-up applications are available in a variety of styles and sizes. Select from rectangular, oval and wheelchair accessible models, all crafted from Type 304 stainless steel in the Elkay tradition. Elkay's lavatory product offering also includes stainless steel multi-station urinals that are ideal for men's commercial restrooms in high-traffic facilities, such as stadiums and schools.





Rectangular Compartment Wash-Up Lavatory Sinks

- 18 gauge, Type 304 stainless steel
- 1-3/4" coved corners
- 2-1/2" high backsplash
- 2-1/2" apron front and sides
- Front and side decks with raised rim
- Exposed surfaces hand-blended to a uniform lustrous satin finish
- Sound absorbing pads applied to dampen sound
- Rear centered outlet
- 1-5/8" drain openingFurnished with wall hanger and integral stainless steel support brackets
- Meets ADA requirements
- Carries NSF International certification







ELV2219SACMC







		Shipping					
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.		
ELV2219SACC	LKB721C	Sensor	AC/Battery	-	24		
ELV2219SACMC	LKB721C	Sensor	AC/Battery	Mechanical	25		
ELV2219SACTMC	LKB721C	Sensor	AC/Battery	Thermostatic	26		
ELV22191		Sink Only -	1 faucet hole)	16		
ELV22193	Sink Only	Sink Only - (3) 1-1/2" faucet holes on 4" centers					
ELV2219CS3	Sink Only	- (3) 1-1/4" 1	aucet holes o	n 2" centers	16		
	WIT	H OVERF	LOW				
ELVWO2219SACC	LKB721C	Sensor	AC/Battery	-	25		
ELVWO2219SACMC	LKB721C	Sensor	AC/Battery	Mechanical	26		
ELVWO2219SACTMC	LKB721C	Sensor	AC/Battery	Thermostatic	27		
ELVWO22191		17					
ELVWO22193	Sink Only -	17					
ELVWO2219CS3	Sink Only -	(3) 1-1/4" fa	aucet holes or	n 2" centers	17		

Dimensions for all listed units (inches)								
OVERAL	L SIZE	BASIN						
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH				
22	19	16	11-1/2	5-1/2				

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.



Oval Compartment Wash-Up Lavatory Sinks

- 18 gauge. Type 304 stainless steel.
 Anti-splash rim
 5-1/2" high Backsplash

- 2" wide Apron
- Exposed surfaces hand blended to a uniform lustrous satin finish
- Undercoated for maximum sound deadening
- 1-5/8" drain opening
- Furnished with stainless steel wall support
- Meets ADA requirements





ELV18173

Model Number		Shipping WT. LBS.
ELV18173	Sink Only - (3) 1-1/2" faucet holes on 4" centers	17
ELV1817CS3	Sink Only - (3) 1-1/4" faucet holes on 2" centers	17

Dimensions for all listed units (inches)								
OVERA	LL SIZE	BASIN						
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH				
18	17	13-5/8	10-1/8	5-13/16				



ELV1817CS3





Wheelchair Wash-Up Lavatory Sinks

- 18 gauge, Type 304 stainless steel
- Uniform lustrous satin finish
- 1-3/4" coved corners
- 2-1/2" apron, front and sides
- 2-1/2" high backsplash
- Wide top deck with raised rim
- Sound absorbing pads applied to dampen sound
- Rear centered outlet
- 1-5/8" drain opening
- Sinks with overflow include LKAD174 drain
- Sinks without overflow include LKAD174LO drain
- Furnished with wall hangers and integral stainless steel support brackets
- Meets ADA requirements
- Carries NSF International certification







WCL1923OSDSBMC



WCL1923OSD3

		Shipping				
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.	
WCL1923OSDC	LKD232SBH5C	5" Wristblade	=	-	22	
WCL1923OSDSACC	LKB721C	Sensor	AC/Battery	-	25	
WCL1923OSDSACMC	LKB721C	Sensor	AC/Battery	Mechanical	26	
WCL1923OSDSACTMC	LKB721C	Sensor	AC/Battery	Thermostatic	27	
WCL1923OSD1		Sink Only - 1 faucet hole				
WCL1923OSD3	Sink Only -	(3) 1-1/2" fau	icet holes o	n 4" centers	17	
	WITH	OVERFLO\	N			
WCLWO1923OSDC	LKD232SBH5C	5" Wristblade	-	-	24	
WCLWO1923OSDSACC	LKB721C	Sensor	AC/Battery	-	27	
WCLWO1923OSDSACMC	LKB721C	Sensor	AC/Battery	Mechanical	28	
WCLWO1923OSDSACTMC	LKB721C	Sensor	AC/Battery	Thermostatic	29	
WCLWO1923OSD1		Sink Only - 1 faucet hole				
WCLWO1923OSD3	Sink Only -	(3) 1-1/2" fau	icet holes o	n 4" centers	19	

BASIN

WIDTH

DEPTH

LENGTH

13-1/2



WCLWO1923OSDSBTMC

-	0	4	
	0	120	

WCLWO1923OSD3

Dimensions for all listed units (inches)

WIDTH

23

OVERALL SIZE

LENGTH

19

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.



Multiple Station UrinalsWith Exposed Flush Pipe

- 14 gauge, Type 304 stainless steel
- Welded seamless 1/4" coved corners
- Full length sloping backsplash with flush pipe
- 1-1/2" wide top channel rims with 2" flat front apron
- Slanted front
- Exposed surfaces polished to a satin finish
- Undercoated for maximum sound deadening
- Furnished with continuous length wall hanger and integral stainless steel mounting brackets
- LK177 strainer included
- Will not crack, chip or discolor
- Easy to clean and sanitize
- Designed for use with any water control-flush valve, time valve, or tank
- Watercontrol valve and trap not included



Model Number	Overall Size (inches) Length Width Depth			Backsplash Height <i>(inches)</i>	No. of Drains	Shipping WT. LBS.
EU4814C	48	14	8	8	1	61
EU6014C	60	14	8	8	1	71

Multiple Station UrinalsWith Integral Hood

 Same features as above but with integral hood to conceal flush pipe



Model Number	Overall Size (inches) Length Width Depth		Backsplash Height (inches)	No. of Drains	Shipping WT. LBS.	
EUH4814C	48	14	8	8	1	67
EUH6014C	60	14	8	8	1	75





Elkay **Scrub and Hand Wash Sinks** are designed specifically for healthcare applications, including hospitals, medical clinics, dental facilities and doctor's offices. Our offering consists of surgeon's lavatories. scrub-up sinks and wash sinks, including a variety of models equipped with sensor faucets, or knee and foot pedal valves, for the ultimate in hands-free, sanitary activation. Plus, our stainless steel sinks provide superior bacterial cleanability compared to other materials.



Surgeon's Lavatory with Instrument Trays

- 16 gauge, Type 304 stainless steel
- Integral instrument trays
- 1-3/4" coved corners
- Exposed surfaces are hand-blended to a uniform lustrous satin finish
- Undercoated for maximum sound deadening
- 2" drain opening
- Models with faucets include LK9 grid drain fitting
- Furnished with stainless steel support brackets
- Mount 1-1/2" from wall
- Easy to clean and sanitize
- Will not crack, chip or discolor



		Package Detail*							
	Model Number	Faucet	Handle	Handle Power		WT. LBS.			
	ESLV2820W4C	LK800GN05T4	4" Wristblade	-	-	37			
	ESLV2820W6C	LK800GN05T6	6" Wristblade	-	-	37			
	ESLV2820SACC	LKB721C	Sensor	AC/Battery	-	39			
	ESLV2820SACMC	LKB721C	Sensor	AC/Battery	Mechanical	40			
ı	ESLV2820SACTMC	LKB721C	Sensor	AC/Battery	Thermostatic	41			
	ESLV2820FC	LK396A	LK398C	Foot	-	42			
	ESLV2820KC	LK396A	LK397C	Knee	-	47			
	ESLV28201		30						
	ESLV28203	Sink Only -	(3) 1-1/2" fauc	et holes on	4" centers	30			

Dimensions for all listed units (inches)								
OVERA	LL SIZE	В	BASIN SIZE		INSTRUMENT TRAY SIZE			
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH	LENGTH	WIDTH	DEPTH	
28	20	14	12	7-1/2	3-3/4	14	1-1/2	



ESLV28203



ESLV2820SACMC





^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





Wall Scrub-Up Sinks

- 14 gauge, Type 304 stainless steel
- 1-3/4" radius coved corners
- 1-1/2" rolled rims
- Full length 6" high backsplash
- Exposed surfaces are hand-blended to a uniform lustrous satin finish
- Undercoated for maximum sound deadening
- 3-1/2" drain opening
- Furnished with wall hanger and stainless steel support brackets
- Easy to clean and sanitize
- Will not crack, chip or discolor







Dimensions for all listed units (inches)							
OVERALL SIZE		BASIN					
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH			
25	19-1/2	22	16	10-1/2			



EWS3120SBC

		Shipping			
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.
	31	INCH SIN	KS		
EWS3120W4C	LK940GN08T4H	4" Wristblade	-	-	56
EWS3120W6C	LK940GN08T6H	6" Wristblade	-	-	57
EWS3120SACC	LKB722C	Sensor	AC/Battery	-	60
EWS3120SACMC	LKB722C	Sensor	AC/Battery	Mechanical	61
EWS3120SACTMC	LKB722C	Sensor	AC/Battery	Thermostatic	62
EWS3120FC	LK395A	LK398C	Foot	-	62
EWS3120KC	LK395A	LK397C	Knee	-	67
EWS31201		50			
EWS31202		Sink Only - 2 f	aucet holes		50

Dimensions for all listed units (inches)						
OVERA	LL SIZE	BASIN				
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH		
31	19-1/2	28	16	10-1/2		

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.



Hand Wash-Up Wall Mount

- Type 304 stainless steel basin
- 1-3/4" radius coved corners
- Full length 7" high backsplash with 45° angle sloped top
- Exposed surfaces have a brushed finish
- 2" drain opening
- Models with faucets include LK8 grid drain fitting with 1-1/2" O.D. tailpiece and LK500 satin chrome cast brass "P" trap with clean out
- Will not chip, crack or discolor
- Easy to clean and sanitize
- Furnished with hanger and integral stainless steel support brackets
- Carries NSF International certification





	Package Detail*				Shipping
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.
CHS1716C	LK940GN04L2H	2" Lever	-	-	18
CHS1716SACC	LKB722C	Sensor	AC/Battery	-	23
CHS1716SACMC	LKB722C	Sensor	AC/Battery	Mechanical	24
CHS1716SACTMC	LKB722C	Sensor	AC/Battery	Thermostatic	25
CHS17161	9	12			
CHS17162	Si	nk Only - 2	faucet holes		12



Dimensions for all listed units (inches)						
OVERA	LL SIZE	BASIN				
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH		
16-3/4	15-1/2	12	9-1/4	6		





^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





Hand Wash-Up with Side Splashes

- Type 304 stainless steel basin
- 1-3/4" radius coved corners
- Full length 7" high backsplash with 45° angle sloped top
- Exposed surfaces have a brushed finish
- 2" drain opening
- Models with faucets include LK8 grid drain fitting with 1-1/2" O.D. tailpiece and LK500 satin chrome cast brass "P" trap with clean out
- Will not chip, crack or discolor
- Easy to clean and sanitize
- Furnished with hanger and integral stainless steel support brackets
- Carries NSF International certification





	Package Detail*				Shipping	
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.	
CHS1716LRSC	LK940GN04L2H	2" Lever	-	-	21	
CHS1716LRSSACC	LKB722C	Sensor	AC	-	25	
CHS1716LRSSACMC	LKB722C	Sensor	AC	Mechanical	26	
CHS1716LRSSACTMC	LKB722C	Sensor	AC	Thermostatic	27	
CHS1716LRS1	S	14				
CHS1716LRS2	Si	Sink Only - 2 faucet holes				



Dimensions for all listed units (inches)							
OVERA	LL SIZE	BASIN					
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH			
16-3/4	15-1/2	12	9-1/4	6			

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.



Hand Wash-Up Pedestal Mount

- Type 304 stainless steel basin
- 1-3/4" radius coved corners
- Full length 7" high backsplash with 45° angle sloped top
- Exposed surfaces have a brushed finish
- Will not chip, crack or discolor
- Easy to clean and sanitize
- 2" drain opening
- Includes LK8 grid drain fitting with 1-1/2" O.D. tailpiece and LK500 satin chrome cast brass "P" trap with clean out
- 36" floor to rim
- Carries NSF International certification





		Shipping			
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.
	WITHOUT	SIDE SPI	ASHES		
CHSP1716C	LK395A	LK399A	Foot	-	20
CHSP1716SACC	LKB722C	Sensor	AC	-	25
CHSP1716SACMC	LKB722C	Sensor	AC	Mechanical	26
CHSP1716SACTMC	LKB722C	Sensor	AC	Thermostatic	27
	WITH S	IDE SPLA	SHES		
CHSP1716LRSC	LK395A	LK399A	Foot	-	22
CHSP1716LRSSACC	LKB722C	Sensor	AC	-	27
CHSP1716LRSSACMC	LKB722C	Sensor	AC	Mechanical	28
CHSP1716LRSSACTMC	LKB722C	Sensor	AC	Thermostatic	29

Dimensions for all listed units (inches)						
OVERALL SIZE		BASIN				
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH		
16-3/4	15-1/2	12	9-1/4	6		



CHSP1716SACC



CHSP1716LRSC

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





Hand Wash-Up Wall Mount

- Type 304 stainless steel basin
- 1-3/4" radius coved corners
- Full length 7" high backsplash with 45° angle sloped top
- Inverted edge on sink rim
- Exposed surfaces have brushed finish
- 2" drain opening
- Model with faucet includes LKBB drain
- Will not chip, crack or discolor
- Easy to clean and sanitize
- Furnished with hanger support bracket
- Carries NSF International certification



	Package	ge Detail Shippin	
Model Number	Faucet	Handle	WT. LBS.
CHSB1716C	LKB400	2" Lever	13.5
CHSB17162	Sink Only - 2 fau	11.0	





CHSB17162

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.



Single Station Wash Sink with Right Drainboard

- 14 gauge, Type 304 stainless steel
- Right hand 30" drainboard
- 1/4" radius vertical and horizontal coved corners with 1-1/2" rolled rims
- Full length 8" backsplash with 45° sloped top
- Exposed surfaces are hand-blended to a uniform lustrous satin finish
- Will not crack, chip or discolor
- Easy to clean and sanitize
- 3-1/2" drain opening
- Furnished with wall hanger and stainless steel support brackets
- Models with faucets include LK18B stainless steel grid drain with 1-1/2" O.D. tailpiece
- Carries NSF International certification
- Model ESS4220R is less backsplash





		Shipping					
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.		
WITH BACKSPLASH							
ESS4924RW4C	LK940GN08T4H	4" Wrist Blade	-	-	116		
ESS4924RW6C	LK940GN08T6H	6" Wrist Blade	-	-	117		
ESS4924RSACC	LKB722C	Sensor	AC	-	120		
ESS4924RSACMC	LKB722C	Sensor	AC	Mechanical	121		
ESS4924RSACTMC	LKB722C	Sensor	AC	Thermostatic	122		
ESS4924RFC	LK395A	LK398C	Foot	-	122		
ESS4924RKC	LK395A	LK397C	Knee	-	127		
ESS4924R1	Sink Only – 1 faucet hole				110		
ESS4924R2		110					
	WITHO	OUT BACKS	PLASH				
ESS4220R		Sink			100		

Dimensions for all ESS4924 models (inches)					
OVERA	LL SIZE	COM	PARTMENT	Γ SIZE	
LENGTH	WIDTH	LENGTH	WIDTH	DEPTH	
49-1/2	24	18	20-1/2	10	
Dimens	sions for	ESS4220F	(inches)		
42	20	17	17	6	







^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





Multiple Station Wash Sinks

- 14 gauge, Type 304 stainless steel
- 1/4" coved corners
- 1-1/2" wide inward sloping top channel rims, with 2" flat apron
- Full length 10" high backsplash
- Square rim corners
- Slanted front
- 3-1/2" drain opening
- LK18B drain included on "C" models
- Exposed surfaces are hand-blended to a uniform lustrous finish
- Furnished with wall hangers and stainless steel support brackets
- Will not chip, crack or discolor



		Package D	etail*		Shipping
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.
	48 INCH	TWO STAT	ION		
EWMA4820C	(2) LK940GN08T4H	4" Wristblade	-	-	87
EWMA4820SACC	(2) LKB722C	Sensor	AC	-	93
EWMA4820SACMC	(2) LKB722C	Sensor	AC	(2) Mechanical	94
EWMA4820SACTMC	(2) LKB722C Sensor AC (2) Thermostatic				95
EWMA48202		75			
EWMA48204		Sink Only - 4 fa	ucet hole	S	75



Dimensions for all listed units (inches)					
	OVERALL SIZE				
LENGTH	WIDTH	DEPTH			
48	20	8			



		Shipping				
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.	
	60 INCH 1	HREE STA	TION			
EWMA6020C	(3) LK940GN08T4H	4" Wristblade	-	-	106	
EWMA6020SACC	(3) LKB722C	Sensor	AC	-	114	
EWMA6020SACMC	(3) LKB722C	Sensor	AC	(3) Mechanical	115	
EWMA6020SACTMC	(3) LKB722C	(3) LKB722C Sensor AC (3) Thermostatic				
EWMA60203		89				
EWMA60206		Sink Only - 6 fa	aucet hole	S	89	



Dimensions for all listed units (inches)				
OVERALL SIZE				
LENGTH	WIDTH	DEPTH		
60	20	8		

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





		Package D	etail*		Shipping	
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.	
	72 INCH 1	THREE STA	TION			
EWMA7220C	(3) LK940GN08T4H	4" Wristblade	-	-	119	
EWMA7220SACC	(3) LKB722C	Sensor	AC	-	127	
EWMA7220SACMC	(3) LKB722C	Sensor	AC	(3) Mechanical	128	
EWMA7220SACTMC	(3) LKB722C	(3) LKB722C Sensor AC (3) Thermostatic				
EWMA72203		102				
EWMA72206	S	Sink Only - 6 fau	ucet holes		102	

Dimensions for all listed units (inches)				
OVERALL SIZE				
LENGTH	WIDTH	DEPTH		
72	20	8		



		Shipping			
Model Number	Faucet	Handle	Power	Mixing Valve	WT. LBS.
	96 INCH	FOUR STAT	TION		
EWMA9620C	(4) LK940GN08T4H	4" Wristblade	-	-	152
EWMA9620SACC	(4) LKB722C	Sensor	AC	-	163
EWMA9620SACMC	(4) LKB722C	Sensor	AC	(4) Mechanical	164
EWMA9620SACTMC	(4) LKB722C	(4) LKB722C Sensor AC (4) Thermostatic			
EWMA96204		130			
EWMA96208		Sink Only - 8 fa	aucet hole	S	130

Dimensions for all listed units (inches)				
OVERALL SIZE				
LENGTH	WIDTH	DEPTH		
96	20	8		

Note:

LK395A spout with knee or foot pedal valves can also be used with all EWMA stainless steel sinks. See page 47.

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





Sensor-OperatedWash Sinks

- 16 gauge, Type 304 stainless steel
- Slant-front design
- Keyed access door(s) to hide plumbing
- Coved corners
- 4" high full length backsplash
- Undercoated for maximum sound deadening
- Wall hanger
- Full enclosure
- Exposed surfaces are polished to a uniform lustrous finish
- 3-1/2" drain opening
- Models with faucets include LK18B drain





Removable Clear Acrylic Compartment Partition

		Overa	all Size (i	nches)		Package D	etail*		Shipping
	Model Number	Length	Width	Depth	Faucet	Handle	Power	Mixing Valve	WT. LBS.
				SING	LE COMPAR	TMENT			
	EWSF13026SACC	30	23	26	LKB721C	Sensor	AC	Manual	96
	EWSF130261	30	23	26		Sink Only - 1	I faucet hole		85
		5	SINGLE	COMP	ARTMENT A	DA COMPI	JANT		
1	EWSFAD13620SACC	36	20	24	LKB722C	Sensor	AC	-	115
1	EWSFAD136201	36	23	26		Sink Only - 1	faucet hole		105
				DOUE	BLE COMPAR	TMENT			
	EWSF26026SACC	60	23	26	(2) LKB721C	Sensor	AC	Manual	172
	EWSF260262	60	23	24		Sink Only - 2	faucet holes		150
				TRIP	LE COMPART	MENT			
	EWSF39026SACC	90	23	26	(3) LKB721C	Sensor	AC	Manual	243
	EWSF390263	90	23	26		Sink Only - 3	faucet holes		210





[†] These models are ADA compliant.

^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.



Knee-OperatedWash Sinks

- 16 gauge, Type 304 stainless steel
- Knee operated water and soap push panels
- Latched front panel
- User adjustable water temperature valve
- 4" high full length backsplash
- Coved corners
- Full length backsplash
- Undercoated for maximum sound deadening
- Wall hanger
- Full enclosure
- Exposed surfaces are polished to a satin finish
- 3-1/2" drain opening
- Double and triple compartment models include removable clear acrylic partitions



Model Number	Packag With Knee	Shipping WT. LBS.	
EWSF13026KWSC	Soap & Water	-	85
EWSF13026KWC	=	Water	85

Dimensions for all listed units (inches)				
OVERALL SIZE				
LENGTH	WIDTH	DEPTH		
30	23	22		

Model Number	Packag With Knee		Shipping WT. LBS.
EWSF26026KWSC	Soap & Water	-	150
EWSF26026KWC	-	Water	150

Dimensions for all listed units (inches)										
	OVERALL SIZE									
LENGTH WIDTH DEPTH										
60	23	22								

Model Number	Package With Knee		Shipping WT. LBS.
EWSF39026KWSC	Soap & Water	-	210
EWSF39026KWC	-	Water	210

Dimensions for all listed units (inches)									
	OVERALL SIZE								
LENGTH WIDTH DEPTH									
90	23	22							



EWSF13026KWSC







Elkay **Service and Utility Sinks** are ideal for the heavy janitorial requirements in schools, hospitals, industrial facilities and office buildings. Designed to withstand abuse from buckets, mops and other maintenance equipment, Elkay service sinks will provide years of service. Our offering in this category also includes the *Sturdibilt*® line of scullery sinks, making our service and utility lineup one of the most versatile in the industry!



Wall Service Sinks

- 14 gauge, Type 304 stainless steel
- 1-3/4" coved corners
- 1-1/2" rolled rims
- Full length 12" high backsplash
 Exposed surfaces hand-blended to a uniform lustrous satin finish
- 3-1/2" drain opening
- Furnished with wall hanger and stainless steel support brackets
- Will not crack, chip or discolor
- LK173 cast iron "P" trap standard on "C" models



	Package Detail*							
Model Number	el Number Faucet		Faucet Handle Spout					
ESS2118C	LK69C	Cross Arm	1 Plain / 1 Threaded Hose Outlet	59				
ESS2319C	LK69C	Cross Arm	1 Plain / 1 Threaded Hose Outlet	62				
ESS2520C	LK69C	Cross Arm	1 Plain / 1 Threaded Hose Outlet	63				
ESSB2118C	LK940BR03L2H	2" Lever	Threaded Hose w/ 3" Bucket Hook	61				
ESSB2319C	LK940BR03L2H	2" Lever	Threaded Hose w/ 3" Bucket Hook	65				
ESSB2520C	LK940BR03L2H	2" Lever	Threaded Hose w/ 3" Bucket Hook	66				
ESSW2118C	LK940BR07L2H	2" Lever	Threaded Hose w/ 7" Bucket Hook	63				
ESSW2319C	LK940BR07L2H	2" Lever	Threaded Hose w/ 7" Bucket Hook	67				
ESSW2520C	LK940BR07L2H	2" Lever	Threaded Hose w/ 7" Bucket Hook	68				
ESS21182		Sink Only - 2 f	aucet holes	37				
ESS23192		Sink Only - 2 f	aucet holes	41				
ESS25202		Sink Only - 2 f	aucet holes	42				

Dimensions for all 2118 listed units (inches)										
OVERAI LENGTH 21	L SIZE WIDTH 17-1/2									
Dimension	Dimensions for all 2319 listed units (inches)									
OVERAL	L SIZE	COMPARTMENT SIZE LENGTH WIDTH DEPTH 20 15 12								
LENGTH 23	WIDTH 18-1/2									
	18-1/2	20	15	12						







^{*} Refer to pages 51-52 for complete descriptions of faucets and mixing valves.





Floor Service Sinks

- 16 gauge, Type 304 stainless steel
- Eliminates high lifting of heavy containers
- Fits into closet corners and limited work spaces
- 1-3/4" coved corners
- Apron on three sides
- Top has 5/32" raised rims
- Exposed surfaces are polished to a lustrous satin finish
- Sound absorbing pads applied to dampen sound
- Furnished with wall hanger and LK43 drain

Model Number	Overall Si Length	ze (inches) Width	Compa Length	rtment Siz Width	e (inches) Depth	Shipping WT. LBS.
EFS2523C	25	23	20	18	8	42
EFS3321C	33	21	28	16	8	48

Back and Side PanelsFor Floor Service Sinks

- For use on EFS model floor sinks
- 18 gauge, Type 304 stainless steel
- 1/2" returns on all sides
- Furnished with concealed wall hangers



	Overall Size	Ze (inches)	Fits Sink	Shipping
Model Number	Length	Width	Model	WT. LBS.
EFSBP25	25	12	EFS2523C	7
EFSBP33	33	12	EFS3321C	9
EFSSP21	20-3/8	12	EFS3321C	4
EFSSP23	22-3/8	12	EFS2523C	5



Sturdibilt Single Compartment Scullery Sinks

- 14 gauge, Type 304 stainless steel
- Square corner welded compartment construction
- Distinctive channel rim design with 2" apron minimizes spillover
- Straight line styling
- 8" high full length backsplash with 45° slope to resist grime
- 14" deep compartments
- Drainboard and sink compartments pitched to drain
- 3-1/2" drain opening
- Sink polished to a uniform lustrous satin finish
- Sink supported on (4) LK251 stainless steel adjustable tubular legs
- 1-5/8" O.D., with up to 1" adjustable bullet shaped stainless steel feet



Model Number	Compartn Length	nent Siz	e (inches) Depth	Overall Si Length	ze (inches) Width	24" Drainboard	Shipping WT. LBS.
		SING	LE COM	IPARTME	ENT		
SS81242	24	24	14	27	27-1/2	None	80
SS8124R2	24	24	14	49-1/2	27-1/2	Right	105
SS8124L2	24	24	14	49-1/2	27-1/2	Left	105
SS8124LR2	24	24	14	72	27-1/2	Left & Right	190
SS81302	30	24	14	33	27-1/2	27-1/2 None	90
SS8130R2	30	24	14	55-1/2	27-1/2	27-1/2 Right	
SS8130L2	30	24	14	55-1/2	27-1/2	Left	115
SS8130LR2	30	24	14	78	27-1/2	Left & Right	175
SS81362	36	24	14	39	27-1/2	None	100
SS8136R2	36	24	14	61-1/2	27-1/2	Right	120
SS8136L2	36	24	14	61-1/2	27-1/2	Left	120
SS8136LR2	36	24	14	84	27-1/2	Left & Right	210





For non-standard hole configuration see pages 58 -59.

Optional Detachable drainboard Model SSD24

Stainless steel, #14 gauge, Type 304. Specially designed cantilever bracket support. Readily removable without tools. Meets sanitary code requirements. May be used right or left. 24" long. Ship Wt. 30 lbs.















	Compartr	nent Siz	Z C (inches)	Overall S	ize (inches)	24"	Shipping
Model Number	Length	Width	Depth	Length	Width	Drainboard	WT. LBS.
	ENT						
SS82302	15	24	33	27-1/2	None	95	
SS8230R2	15	24	14	55-1/2	27-1/2	Right	120
SS8230L2	15	24	14	55-1/2	27-1/2	Left	120
SS8230LR2	15	24	14	78	27-1/2	Left & Right	200
SS82362	18	24	14	39	27-1/2	None	105
SS8236R2	18	24	14	61-1/2	27-1/2	Right	130
SS8236L2	18	24	14	61-1/2 27-1/2 84 27-1/2	27-1/2	Left	130
SS8236LR2	18	24	14		Left & Right	215	
SS82422	21	24	14	45	27-1/2	None	150 120
SS82482	24	24	14	51 27-1/2	27-1/2	None	
SS8248R2	24	24	14	73-1/2	27-1/2	Right	200
SS8248L2	24	24	14	73-1/2	27-1/2	Left	200
SS8248LR2	24	24	14	96	27-1/2	Left & Right	225
SS82542	27	24	14	57	27-1/2	None	130
SS8254R2	27	24	14	79-1/2	27-1/2	Right	215
SS8254L2	27	24	14	79-1/2	27-1/2	Left	215
SS8254LR2	27	24	14	102	27-1/2	Left & Right	245
SS82602	30	24	14	63	27-1/2	None	140
SS8260R2	30	24	14	85-1/2	27-1/2	Right	225
SS8260L2	30	24	14	85-1/2	27-1/2	Left	225
SS8260LR2	30	24	14	108	27-1/2	Left & Right	270

For non-standard hole configuration see pages 58-59.





Model Number Compartment Size (inches) Length Width Depth					ize (inches) Width	24" Drainboard	Shipping WT. LBS.
		TRIPL	E COM	IPARTME	NT		
SS83454	15	24	14	48	27-1/2	None	125
SS8345R4	15	24	14	70-1/2	27-1/2	Right	150
SS8345L4	15	24	14	70-1/2	27-1/2	Left	150
SS8345LR4	15	24	14	93	27-1/2	Left & Right	240
SS83544	18	24	14	57	27-1/2	None	140
SS8354R4	18	24	14	79-1/2	27-1/2	Right	170
SS8354L4	18	24	14	79-1/2	27-1/2	Left	170
SS8354LR4	18	24	14	102	27-1/2	Left & Right	255
SS83604	20	24	14	63	27-1/2	None	160
SS8360LR4	20	24	14	108	27-1/2	Left & Right	280
SS83724	24	24	14	75	27-1/2	None	230
SS8372R4	24	24	14	97-1/2	27-1/2	Right	255
SS8372L4	24	24	14	97-1/2	27-1/2	Left	255
SS8372LR4	24	24	14	120	27-1/2	Left & Right	305





SS83454





SS8372L4





Elkay **Classroom Sinks** provide the versatility and durability required for multitasking in the classroom. Available as **complete packages**, with faucet, Flexi-Guard® Bubbler and strainer included, our classroom sinks are the ideal way to provide hand washing, light clean up and drinking water all in one area.



Lustertone® Classroom Sinks

- 18 gauge, type 304 nickel bearing stainless steel
- 1-3/4" radius coved corners
- Exposed surfaces hand blended to a lustrous highlighted Lustertone® satin finish
- Underside of sink is fully undercoated
- Recessed bowls and faucet deck
- 3-1/2" drain opening on large bowl
- 2" drain opening on small bowl
- DRKAD models comply with ADA requirements
- Available as sink only or as complete package (with faucet, bubbler and strainer)







Lustertone® Double Bowl Sinks

Packages include:

- LKD2439C concealed mount faucet; height-10". 45° restricted swing spout with aerator
- LK1141A no-lead Flexi-Guard® bubbler
- LK35 strainer for large bowl
- LK8 grid strainer for small fountain bowl



DRKR3717R4

	Model	Overall (inche			Ea Left	ach Bo	wl Size	(inches Right)	Minimum Cabinet	Faucet	Shipping
	Number	Ĺ	W	L	W	D	L.	W	D	Size	Holes	WT. LBS.
					SIN	IK PA	CKAG	ES				
	DRKR3717LC	37-1/4	17	9-1/4	12	3-5/8	16 1	1-1/2	7-5/8	42"	4	27
	DRKR3717RC	37-1/4	17	16	11-1/2	7-5/8	9-1/4	12	3-5/8	42"	4	27
†	DRKAD3717LC	37-1/4	17	9-1/4	12	3-5/8	16 1	1-1/2	5-1/2*	42"	4	27
†	DRKAD3717RC	37-1/4	17	16	11-1/2	5-1/2*	9-1/4	12	3-5/8	42"	4	27
,	DRKR3717L	37-1/4	17	9-1/4	12	3-5/8	16 1	1-1/2	7-5/8	42"	4	18
	DRKR3717R	37-1/4	17	16	11-1/2	7-5/8	9-1/4	12	3-5/8	42"	4	18
†	DRKAD3717L	37-1/4	17	9-1/4	12	3-5/8	16 1	1-1/2	5-1/2*	42"	4	18
†	DRKAD3717R	37-1/4	17	16	11-1/2	5-1/2*	9-1/4	12	3-5/8	42"	4	18

^{*} Also available with 6 or 6-1/2 inch bowl depths.



Most classroom sinks featured in this catalog are available with our Quick-Clip® Mounting System. See Elkay Residential Catalog for complete description and ordering information.





Lustertone® Single Bowl, Single Ledge Sinks

Packages include:

- LKD208513LC single handle, rigid gooseneck spout faucet with aerator; height-13"
- LK1141A no-lead Flexi-Guard® bubbler
- LK35 strainer

Vandal Resistant Packages include:

- LKDVR208513L faucet with vandal-resistant aerator/handle screws and factory installed anti-rotation pins.
- LKVR1141A no-lead Flexi-Guard® bubbler with anti-rotation feature and metal mouth guard.
- LKVR18 drain fitting with vandal-resistant 3" perforated grid strainer.





Model Number		all Size ches) W	Bowl Size (inches) L W D		Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.	
SINK PACKAGES								
DRKR2217LC	22	17	16	13-1/2	7-5/8	27"	2	24
DRKR2217RC	22	17	16	13-1/2	7-5/8	27"	2	24
DRKR2217LVRC	22	17	16	13-1/2	7-5/8	27"	2	24
DRKR2217RVRC	22	17	16	13-1/2	7-5/8	27"	2	24
				SINK	ONLY			
DRKR2217	22	17	16	13-1/2	7-5/8	27"	1 or 2	13
DRKAD2217	22	17	16	13-1/2	5-1/2*	27"	1 or 2	13

Note: "L" version comes with wing handle on left of faucet.
"R" version comes with wing handle on right of faucet.

Lustertone® Single Bowl, Rear and Side Ledge Sinks

DRKR2220R4

	Model Number		rall Size oches) W	L	Bowl Size (inches) W	e D	Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
					SINK (ONLY			
	DRKR2220L	22	19-1/2	16	13-1/2	7-5/8	27"	2, 3 or 4	14
	DRKR2220R	22	19-1/2	16	13-1/2	7-5/8	27"	2, 3 or 4	14
	DRKR2522L	25	22	19	16	7-5/8	30"	2, 3 or 4	16
	DRKR2522R	25	22	19	16	7-5/8	30"	2, 3 or 4	16
†	DRKAD2220L	22	19-1/2	16	13-1/2	5-1/2*	27"	2, 3 or 4	14
†	DRKAD2220R	22	19-1/2	16	13-1/2	5-1/2*	27"	2, 3 or 4	14
†	DRKAD2522L	25	22	19	16	5-1/2*	30"	2, 3 or 4	16
†	DRKAD2522R	25	22	19	16	5-1/2*	30"	2, 3 or 4	16

[†] Available in 4 or 6-1/2 inch bowl depths.

^() Indicates standard number of faucet holes.



Lustertone® Single Bowl, Double Ledge Sinks

DRKR & DRKAD Packages include:

- LKD2439C concealed mount faucet; 45° restricted swing spout with aerator; height-10"
- LK1141A no-lead Flexi-Guard® bubbler
- LK35 strainer

DRKRC Package includes:

- LKD2432C two-handle concealed mount faucet with swing spout and aerator.
- LK1141A no lead Flexi-Guard® bubbler.
- LKJ35 strainer.







	Model Number		rall Size oches) W	L	Bowl Si (inches)		Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
				112	NK PA	CKAGE	S		
	DRKR2220C	22	19-1/2	13-1/2	16	7-5/8	27"	4	23
	DRKR2517C	25	17	16	13-1/2	7-5/8	30"	4	22
	DRKR3119C	31	19-1/2	22	16	7-5/8	36"	4	25
	DRKRC2220C	22	19-1/2	13-1/2	16	7-5/8	27"	4	23
	DRKRC2517C	25	17	16	13-1/2	7-5/8	30"	4	22
	DRKRC3119C	31	19-1/2	22	16	7-5/8	36"	4	28
†	DRKAD2220C	22	19-1/2	13-1/2	16	5-1/2*	27"	4	23
†	DRKAD2517C	25	17	16	13-1/2	5-1/2*	30"	4	22
†	DRKAD3119C	31	19-1/2	22	16	5-1/2*	36"	4	25
					SINK	ONLY			
	DRKR2220	22	19-1/2	13-1/2	16	7-5/8	27"	2, 2LM or (4)	14
	DRKR2517	25	17	16	13-1/2	7-5/8	30"	2, 2LM or (4)	13
	DRKR2522	25	22	16	19	7-5/8	30"	2, 2LM or (4)	16
	DRKR3119	31	19-1/2	22	16	7-5/8	36"	2, 2LM or (4)	19
†	DRKAD2220	22	19-1/2	13-1/2	16	5-1/2*	27"	2, 2LM or (4)	14
†	DRKAD2517	25	17	16	13-1/2	5-1/2*	30"	2, 2LM or (4)	13
†	DRKAD2522	25	22	16	19	5-1/2*	30"	2, 2LM or (4)	16
†	DRKAD3119	31	19-1/2	22	16	5-1/2*	36"	2, 2LM or (4)	19



DRKAD2517C



DRKAD25224

[†] Available in 4 or 6-1/2 inch bowl depths.

^() Indicates standard number of faucet holes.





Lustertone® Sink Kits and Sets

DRKR & DRKAD Sink Kits include:

- LKF413945RS faucet; deck mount with remote lever handle; 45° spout rotation; height-11-1/2"
- LK1141A no-lead Flexi-Guard® bubbler
- LK35 strainer

DRKR & DRKAD Sink Sets include:

- LKD2439C dual handle faucet; deck mount; multi swing spout with restricted flow aerator; height-11"
- LK1141A no-lead Flexi-Guard® bubbler
- LK35 strainer







	Model Number	Dimensions (inches)							Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
	Number				SINK S			u	Size	Tioles	WI. LDS.
†	DRKR23417LC	19	17	16	11	15	9-1/4	12	42"	4	27
†	DRKR23417RC	19	17	16	11	15	9-1/4	12	42"	4	27
<i>††</i>	DRKR24119LC	25	19-1/2	19	16	16	10	14	42"	4	27
<i>††</i>	DRKR24119RC	25	19-1/2	19	16	16	10	14	42"	4	27
	ADA COMPLIANT										
+	DRKAD23417LC	19	17	16	11	15	9-1/4	12	42"	4	27
†	DRKAD23417RC	19	17	16	11	15	9-1/4	12	42"	4	27
<i>††</i>	DRKAD24119LC	25	19-1/2	19	16	16	10	14	42"	4	27
<i>††</i>	DRKAD24119RC	25	19-1/2	19	16	16	10	14	42"	4	27
				SI	NK SE	TS O	NLY				
†	DRKR23417L	19	17	16	11	15	9-1/4	12	42"	4	27
†	DRKR23417R	19	17	16	11	15	9-1/4	12	42"	4	27
<i>††</i>	DRKR24119L	25	19-1/2	19	16	16	10	14	42"	4	27
<i>††</i>	DRKR24119R	25	19-1/2	19	16	16	10	14	42"	4	27
	ADA COMPLIANT										
†	DRKAD23417L	19	17	16	11	15	9-1/4	12	42"	4	27
+	DRKAD23417R	19	17	16	11	15	9-1/4	12	42"	4	27
<i>††</i>	DRKAD24119L	25	19-1/2	19	16	16	10	14	42"	4	27
<i>††</i>	DRKAD24119R	25	19-1/2	19	16	16	10	14	42"	4	27

[†] Available in large 7-5/8 and small 3-5/8 inch bowl depths.

^{† †} Available in large 4, 4-1/2, 5, 5-1/2, 6, 6-1/2 and small 3-5/8 inch bowl depths.



Lustertone® Single Bowl, Triple Ledge Sinks

Packages include:

- LKF413945RS single-lever Hi-Arc® faucet Spout: height-10"; reach- 6-1/2"
- LK1141A no-lead Flexi-Guard® bubbler
- Strainer: DRKR2822-LK35; DRKAD2822-LKAD35







DRKR2822RC



DRKR2822R3

	Model Number			Bowl Size (inches) L W D			Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.			
	SINK PACKAGES											
	DRKR2822LC	28	22	19	16	7-5/8	33"	3	25			
	DRKR2822RC	28	22	19	16	7-5/8	33"	3	25			
†	DRKAD2822LC	28	22	19	16	5-1/2*	33"	3	25			
†	DRKAD2822RC	28	22	19	16	5-1/2*	33"	3	25			
	SINK ONLY											
	DRKR2822L	28	22	19	16	7-5/8	33"	3	16			
	DRKR2822R	28	22	19	16	7-5/8	33"	3	16			
†	DRKAD2822L	28	22	19	16	5-1/2*	33"	3	16			
†	DRKAD2822R	28	22	19	16	5-1/2*	33"	3	16			

^{*} Also available with 6 or 6-1/2 inch depth.

L & LC models have slotted hole on the left ledge R & RC models have slotted hole on the right ledge





PSDKR2517C

PSDKR2220I 4

Pacemaker® Classroom Sinks

- 20 gauge, type 304 nickel bearing stainless steel self-rim design with double ledge
- 1-3/4" radius coved corners
- Exposed surfaces polished to a bright satin finish
- Underside of sink is fully undercoated
- Drain opening size is 3-1/2"
- Recessed bowls and faucet deck
- Standard two faucet holes furnished unless otherwise specified
- PSDKAD models comply with ADA requirements





PSDKRC2517 Series

PSDKRC2517 Package includes:

- LKD2085LC single wing handle faucet for hot or cold applications with fixed hi-spout aerator. Outlet height: 8-1/4"
- LK1141A no-lead Flexi-Guard® bubbler
- LKJ35 strainer

PSDKRC2517 Package includes:

- LKDVR2085LC same as LKDC2085L except with vandal-resistant aerator and handle screw, and factory installed anti-rotation pins
- LKVR1141A same as LK1141A except with anti-rotation feature and metal mouth guard
- LKVR18 drain fitting with vandal-resistant 3" perforated grid strainer

PSDKRC2517 Series

PSDKR2517C and PSDKAD2517C Packages include:

- LKD208513LC single handle, rigid gooseneck spout faucet with aerator, 13" high overall
- LK1141A no-lead Flexi-Guard® bubbler
- LK35 strainer

PSDKR2517VRC and PSDKAD2517VRC Packages include:

- LKDVR208513LC same as LKD208513L except with vandal-resistant aerator and handle screw, and factory installed anti-rotation pins
- LKVR1141A same as LK1141A except with anti-rotation feature and metal mouth guard
- LKVR18 drain fitting with vandal-resistant 3" perforated grid strainer

	Model		rall Size		Bowl S (inches		Minimum Cabinet	Faucet	Shipping
	Number	L	W	L	W	D	Size	Holes	WT. LBS.
				S	INK PA	CKAGE	S		
	PSDKRC2517C	25	17	16	13-1/2	7-1/8	30"	2	16
	PSDKRC2517VRC	25	17	16	13-1/2	7-1/8	30"	2	16
				S	INK PA	CKAGE	S		
	PSDKR2517VRC	25	17	16	13-1/2	7-1/8	30"	2	23
	PSDKR2517C	25	17	16	13-1/2	7-1/8	30"	2	23
†	PSDKAD2517C	25	17	16	13-1/2	6-1/2*	30"	2	23
†	PSDKAD2517VRC	25	17	16	13-1/2	6-1/2*	30"	2	23
					SINK	ONLY			
	PSDKR2517	25	17	16	13-1/2	7-1/8	30"	2), 2LM or 4	12
†	PSDKAD2517	25	17	16	13-1/2	6-1/2	30"	2), 2LM or 4	12
	PSDKR2220L	22	19-1/2	16	13-1/2	7-1/8	27"	2, 3 or 4	14
	PSDKR2220R	22	19-1/2	16	13-1/2	7-1/8	27"	2, 3 or 4	14

L models have ledge on the left R models have ledge on the right () Indicates standard number of faucet holes.



Celebrity® Classroom Sinks

- 20 gauge, type 304 nickel bearing stainless steel
- 3" corner radius
- Single bowl self-rim, with double ledge
- Exposed surfaces polished to a highlighted bright finish
- Underside of sink is fully undercoated
- Drain opening size is 3-1/2"
- Recessed bowl and faucet decks
- Standard two faucet holes furnished unless otherwise specified
- CDKAD models comply with ADA requirements





CDKR2517C and CDKAD2517C Packages include:

- LKD208513LC single handle, rigid gooseneck spout faucet with aerator, 13" high
- LK1141A no lead Flexi-Guard® bubbler
- LK35 strainer



- LKDVR208513LC same as LKD208513L except with vandal-resistant aerator and handle screw, and factory installed anti-rotation pins
- LKVR1141A same as LK1141A except with anti-rotation feature and metal mouth guard
- LKVR18 drain fitting with vandal-resistant 3" perforated grid strainer



CDKRC2517C Package includes:

- LKDC2085LC single wing handle faucet with fixed hi-spout and aerator; height-8-1/4"
- LK1141A no lead Flexi-Guard® bubbler
- LKJ35 strainer

CDKRC2517VRC Package includes:

- LKDCVR2085LC same as LKDC2085LC except with vandal-resistant aerator and handle screw, and factory installed anti-rotation pins
- LKVR1141A same as LK1141A except with anti-rotation feature and metal mouth guard
- LKVR18 drain fitting with vandal-resistant 3" perforated grid strainer

Model		Overall Size (inches)		В	owl S		Minimum Cabinet	Faucet	Shipping
	Number	L	W	L	W	D	Size	Holes	WT. LBS.
				SINK	(PA	CKAGE	S		
	CDKRC2517C	25	17	15-3/4	14	6-7/8	30"	2	22
	CDKRC2517VRC	25	17	15-3/4	14	6-7/8	30"	2	22
	CDKR2517C	25	17	15-3/4	14	6-7/8	30"	2	22
	CDKR2517VRC	25	17	15-3/4	14	6-7/8	30"	2	22
†	CDKAD2517C	25	17	15-3/4	14	6-1/2	30"	2	22
†	CDKAD2517VRC	25	17	15-3/4	14	6-1/2	30"	2	22
				S	INK	ONLY			
	CDKR2517	25	17	15-3/4	14	6-7/8	30"	2), 2LM or 4	11
†	CDKAD2517	25	17	15-3/4	14	6-1/2	30"	2), 2LM or 4	11

^() Indicates standard number of faucet holes.









Our General Use Sinks are an ideal choice for those areas that do not require a commercial grade product, but still demand the quality and style that Elkay stainless steel sinks provide. Choose from a wide selection of kitchen and hospitality sinks, in single, double and triple bowl configurations, for the teacher's lounge, kitchenette area and other light-duty applications.



Lustertone® Undermount General Use Sinks

- 18 gauge, type 304 nickel bearing stainless steel
- Exposed surfaces are hand blended to a lustrous highlighted Lustertone® satin finish
- Heavy duty Sound Guard® undercoating
- Highlighted inside top bowl radius on models with reveal
- Template and countertop mounting clips included with every sink
- 3-1/2" drain opening size (unless otherwise specified)
- Double and Single bowl models
- PD models have Perfect Drain™ mounting feature



Lustertone® Double Bowl Undermount Sinks

Model	1110 0101					Each Bowl Size (inches) Left Right						
Number	L	W	L	W	D	L	W	D	Size	WT. LBS.		
			ELU	JH31	18 SE	RIES						
ELUH3118	30-3/4	18-1/2	13-1/2	16	7-7/8	13-1/2	16	7-7/8	36"	21		
ELUH311810	30-3/4	18-1/2	13-1/2	16	10	13-1/2	16	10	36"	23		
			ELU	JH31	20 SE	RIES						
ELUH3120L	31-1/4	20-1/2	13-1/2	16	7-7/8	14	18	9-7/8	36"	23		
ELUH3120R	31-1/4	20-1/2	14	18	9-7/8	13-1/2	16	7-7/8	36"	23		
			EL	UHA	D SEF	RIES						
ELUHAD3118	31-3/4	18-1/2	13-1/2	16	*	13-1/2	16	*	36"	21		
ELUHAD3118PD	31-3/4	18-1/2	13-1/2	16	*	13-1/2	16	*	36"	21		
ELUHAD3120R	31-1/4	20-1/2	14	18	*	13-1/2	16	*	36"	23		
ELUHAD3120RPD	31-1/4	20-1/2	14	18	*	13-1/2	16	*	36"	23		
ELUHAD3116	31-1/4	16-1/2	14	14	*	14	14	*	36"	21		
ELUHAD3116PD	31-1/4	16-1/2	14	14	*	14	14	*	36"	21		
ELUHAD3618	35-3/4	18-1/2	16	16	*	16	16	*	39"	27		
ELUHAD4218	41-3/4	18-1/2	19	16	*	19	16	*	45"	27		
ELUHAD4618	45-3/4	18-1/4	21 1	15-3/4	1 *	21	15-3/4	1 *	51"	29		

L models have small bowl on left R models have small bowl on right





^{*} Available in 4-1/2 to 5-1/2 inch bowl depths.





CuVerro® Antimicrobial Copper **General Use Lavatory Sinks**

- 18 gauge, made with CuVerro® antimicrobial copper
- Registered EPA health claim[†] for its inherent ability to kill more than 99.9% infectious bacteria^{††} within 2 hours
- Continously reduces bacterial contamination^{††}
- Supplements routine cleaning and sanitizing
- Surfaces are hand blended to a lustrous satin finish
- Aesthetically pleasing soft rose hue

Overall Size

(inches)

- Sound-absorbing pads are applied to dampen sound
- Round and oval models supplied with 1-1/2" drain opening; rectangular models supplied with 1-5/8" drain opening

Each Bowl Size

(inches)

W

9 Dia.

12 Dia.

16 Dia.

12 Dia.

16 Dia.

15-1/2 11-3/8

TOP MOUNT

16-11/16 15-1/2 11-3/8

D

4-3/4

6

8

6

8

6

Minimum

Cabinet

Size

15"

18"

24"

18"

24"

21"

24"

Shipping

WT. LBS.

3

5

13

6


13

10

12



ELUH1511-CU

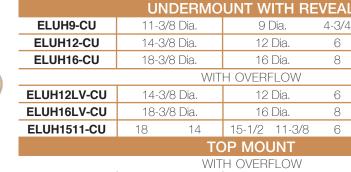

19-5/8

Model

Number

LLVR1916-CU



LLVR19	16 OH
LLVDIS	110-00

Model Number		all Size ches) W	Ead L	ch Bowl S (inches) W	Size D	Shipping WT. LBS.
WIT	HOUT O	VERFLOW	/ / ADA (COMPLIA	NT	
ELV22191-CU	22	19	16	11-1/2	5-1/2	16
ELV22193-CU	22	19	16	11-1/2	5-1/2	16
ELV2219CS3-CU	22	19	16	11-1/2	5-1/2	16
	,	with ove	RFLOW			
ELVWO22191-CU	22	19	16	11-1/2	5-1/2	16
ELVWO22193-CU	22	19	16	11-1/2	5-1/2	16
ELVWO2219CS3-CU	22	19	16	11-1/2	5-1/2	16




[†] The use of CuVerro antimicrobial copper surfaces is a supplement to and not a substitute for standard infection control practices; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. CuVerro antimicrobial copper has been shown to reduce microbial contamination, but it does not necessarily prevent cross-contamination.

^{††}Testing demonstrates effective antibacterial activity against Methicillin-Resistant Staphylcoccus aureus, Staphylcoccus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. coli 0157:H7.



CuVerro® Antimicrobial Copper General Use Top Mount Sinks

- 18 gauge, made with CuVerro® antimicrobial copper
- Registered EPA health claim† for its inherent ability to kill more than 99.9% infectious bacteria†† within 2 hours
- Continously reduces bacterial contamination^{††}
- Supplements routine cleaning and sanitizing
- Surfaces are hand blended to a lustrous satin finish
- Aesthetically pleasing soft rose hue
- Heavy duty Sound Guard® undercoating
- 3-1/2" drain opening

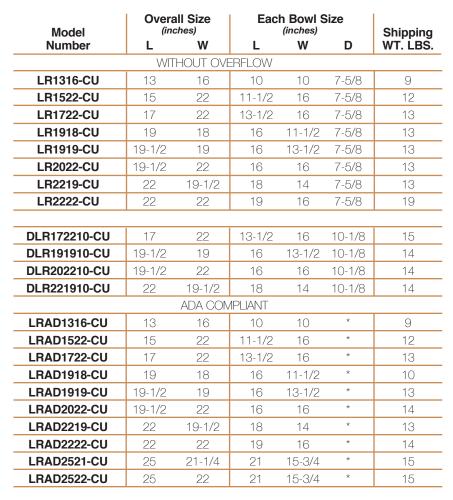











[†] The use of CuVerro antimicrobial copper surfaces is a supplement to and not a substitute for standard infection control practices; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. CuVerro antimicrobial copper has been shown to reduce microbial contamination, but it does not necessarily prevent cross-contamination.

^{††}Testing demonstrates effective antibacterial activity against Methicillin-Resistant Staphylcoccus aureus, Staphylcoccus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. coli 0157:H7.





Lustertone® Single Bowl Undermount SinksWithout Reveal



Model Number	Overall Size (inches) L W	e Bowl Size (inches) L W D	Minimum Cabinet Size	Drain Opening	Shipping WT. LBS.
		WITHOUT REVE	EAL		
ELUH9	11-3/8 Dia.	9 Dia. 4-3/4	15"	2"	7
ELUH12	14-3/8 Dia.	12 Dia. 6	18"	2"	9
ELUH12FB	14-3/8 Dia.	12 Dia. 6	18"	3-1/2"	10
ELUH12LV	14-3/8 Dia.	12 Dia. 6	18"	1-1/2"	6
ELUH16	18-3/8 Dia.	16 Dia. 8	24"	2"	11
ELUH16FB	18-3/8 Dia.	16 Dia. 8	24"	3-1/2"	13
ELUH16LV	18-3/8 Dia.	16 Dia. 8	24"	1-1/2"	13
ELUH1511	18 14	15-1/2 11-3/8 6	21"	1-1/2"	7

Lustertone® Single Bowl Undermount SinksWith Reveal



ELUH1316



ELUH281610

Model Number	Overa (incl	II Size nes) W	L	Bowl Siz (inches) W	e D	Minimum Cabinet Size	Drain Opening	Shipping WT. LBS.
			WITH	H REVE	AL			
ELUH1316	16	18-1/2	13-1/2	16	7-7/8	21"	3-1/2"	11
ELUH1511	18	14	15-1/2	11-3/8	6	21"	1-1/2"	7
ELUH2115	23-1/2	18-1/4	21	15-3/4	7-1/2	27"	3-1/2"	14
ELUH211510	23-1/2	18-1/4	21	15-3/4	10	27"	3-1/2"	18
ELUH281610	30-1/2	18-1/2	28	16	10	36"	3-1/2"	23
			ELUH	AD SEF	RIES			
ELUHAD1116	14	18-1/2	11-1/2	16	*	18"	3-1/2"	11
ELUHAD1212	14-1/2	14-1/2	12	12	*	18"	3-1/2"	11
ELUHAD1316	16	18-1/2	13-1/2	16	*	21"	3-1/2"	11
ELUHAD1316PD	16	18-1/2	13-1/2	16	*	21"	3-1/2"	11
ELUHAD1414	16-1/2	16-1/2	14	14	*	21"	3-1/2"	11
ELUHAD1414PD	16-1/2	16-1/2	14	14	*	21"	3-1/2"	11
ELUHAD1418	16-1/2	20-1/2	14	18	*	21"	3-1/2"	11
ELUHAD1418PD	16-1/2	20-1/2	14	18	*	21"	3-1/2"	11
ELUHAD1616	18-1/2	18-1/2	16	16	*	24"	3-1/2"	11
ELUHAD1916	21-1/2	18-1/2	19	16	*	27"	3-1/2"	17
ELUHAD2115	23-1/2	16-1/2	21	15-3/4	*	27"	3-1/2"	15
ELUHAD2115PD	23-1/2	18-1/4	21	15-3/4	*	27"	3-1/2"	15
ELUHAD2816	30-1/2	18-1/2	28	16	*	36"	3-1/2"	21
ELUHAD2816PD	30-1/2	18-1/2	28	16	*	36"	3-1/2"	21

^{*} Also available with 5 or 5-1/2 inch bowl depths.



Lustertone® General Use Sinks

- 18 gauge, type 304 nickel bearing stainless steel, self rim design
- 1-3/4" radius coved corners
- Exposed surfaces are hand blended to a lustrous highlighted Lustertone® satin finish.
- Underside of sink is fully undercoated
- Highlighted inside top bowl radius
- Standard six faucet holes furnished
- Recessed bowls and faucet deck
- 3-1/2" drain opening
- Triple, Double and Single bowl models






Lustertone® Triple Bowl Sinks

Model Number	Overa (incl L	ill Size nes) W	L L	owl Siz (inches) W		Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
LTR4622	46	22	13-1/2	16	7-5/8	51"	3, 4, 6, 8	29
LTR542210	54	22	16	19	10	57"	3, 4, 6, 8	33
LTR632210	63	22	19	16	10	66"	3, 4, 6, 8	47



Model Number		all Size ches) W		h Bov inches	vl Size	Cabinet Size	Minimum Faucet Holes	Shipping WT. LBS.
LR3319	33	19-1/2	14	14	7-5/8	36"	1, 2, MR2, 3,4 or 5	20
LR3321	33	21-1/4	13-1/2	16	7-7/8	36"	1, 2, MR2, 3,4 or 5	22
LR3322	33	22	13-1/2	16	8-1/8	36"	1, 2, MR2, 3,4 or 5	23
LRAD250 **	33	22	16	13-1/2	2 5-1/2*	36"	1, 2, S2, 3, or 4	21
LRAD2918	29	18	12	12	5-1/2*	33"	1, 2, MR2, 3,4 or 5	16
LRAD2922	29	22	11-1/2	16	5-1/2*	33"	1, 2, MR2, 3,4 or 5	17
LRAD3319	33	19-1/2	14	14	5-1/2*	36"	1, 2, MR2, 3,4 or 5	20
LRAD3321	33	21-1/4	13-1/2	16	5-1/2*	36"	1, 2, MR2, 3,4 or 5	23
LRAD3322	33	22	13-1/2	16	5-1/2*	36"	1, 2, MR2, 3,4 or 5	23
LRAD3722	37	22	16	16	5-1/2*	42"	1, 2, MR2, 3,4 or 5	24
DLR332210	33	22	13-1/2	16	10-1/8	36"	1, 2, MR2, 3,4 or 5	25



^{**} LRAD250 right side bowl measures 14 x 18 x 5-1/2 inches.

LR3321 and LR3322 underside is fully protected by heavy duty Sound Guard® undercoating. Other sinks are fully undercoated.

Indicates standard number of faucet holes.



Most general use sinks featured in this catalog are available with our Quick-Clip® Mounting System. See Elkay Residential Catalog for complete description and ordering information.



LR33214



LR3322104



Lustertone® Single Bowl Sink Packages

- 18 gauge, type 304 nickel bearing stainless steel, self rim design
- 1-3/4" radius coved corners
- Exposed surfaces are hand blended to a lustrous highlighted satin finish.
- Underside of sink is fully undercoated
- Recessed bowls and faucet deck
- 3-1/2" drain opening
- LRAD models complu with ADA requirements





LR1720C



LR2219C



LR2522C

Model Number	Sink Bowl	Faucet	Drain	Trap	Stops	Supplies
LR1716SC	LR17161	LK500GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD171655SC	LRAD1716551	LK500GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD171660SC	LRAD1716601	LK500GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD171665SC	LRAD1716651	LK500GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LR1720SC	LR17202	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD172055SC	LRAD1720551	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD172060SC	LRAD1720601	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD172065SC	LRAD1720651	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LR2219SC	LR22192	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD221955SC	LRAD2219552	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD221960SC	LRAD2219601	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD221965SC	LRAD2219651	LK406GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LR2522SC	LR25223	LK810GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD252255SC	LRAD2522553	LK810GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD252260SC	LRAD2522603	LK810GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LRAD252265SC	LRAD2522653	LK810GN04T4	LK18	LK500	(2) 75768C	(2) 75747C
LR1716C	LR17161	LK500GN04T4	LK18	_	_	_
LRAD171655C	LRAD1716551	LK500GN04T4	LK18	_	_	_
LRAD171660C	LRAD1716601	LK500GN04T4	LK18	_	_	_
LRAD171665C	LRAD1716651	LK500GN04T4	LK18			
LR1720C	LR17202	LK406GN04T4	LK18	_	_	_
LRAD172055C	LRAD1720552	LK406GN04T4	LK18	_	_	_
LRAD172060C	LRAD1720602	LK406GN04T4	LK18	_	_	_
LRAD172065C	LRAD1720652	LK406GN04T4	LK18		_	_
LR2219C	LR22192	LK406GN04T4	LK18	_	_	_
LRAD221955C	LRAD2219552	LK406GN04T4	LK18	_	_	
LRAD221960C	LRAD2219602	LK406GN04T4	LK18	_	_	_
LRAD221965C	LRAD2219652	LK406GN04T4	LK18	_	_	_
. =	LDOTIC	11/01/06:15	112:-			
LR2522C	LR22192	LK810GN04T4	LK18		_	
LRAD252255C	LRAD2522552	LK810GN04T4	LK18	_	_	
LRAD252260C	LRAD2522602	LK810GN04T4	LK18	_	_	
LRAD252265C	LRAD2522652	LK810GN04T4	LK18		_	



Lustertone® Single Bowl Sinks 5 t





Model Number	Overa (incl	III Size hes) W	L	owl Siz (inches) W	e D	Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
LR1316	13	16	10	10	7-5/8	18"	1, 2, MR2 or ③	9
LR1517	15	17-1/2	12	12	7-5/8	18"	1, 2, MR2 or ③	10
LR1716	17	16	14	10	7-5/8	21"	1, 2, MR2, ③ or OS4	8
LR1720	17	20	14	14	7-5/8	21"	1, 2, MR2, ③ or OS4	12
LR1918	19	18	16	11-1/2	7-5/8	24"	1, 2, MR2, ③ or OS4	13
LR1919	19-1/2	19	16	13-1/2	7-1/2	24"	1, 2, MR2, ③ or OS4	13
LR2219	22	19-1/2	18	14	7-5/8	27"	1, 2, MR2, 3, 4 or 5	13
LR2522	25	22	21	15-3/4	8-1/8	30"	1, 2, MR2, 3, 4 or 5	15
LRAD1316	13	16	10	10	5-1/2*	18"	1, 2, MR2 or ③	10
LRAD1517	15	17-1/2	12	12	5-1/2*	18"	1, 2, MR2 or ③	10
LRAD1522	! 15	22	11-1/2	16	5-1/2*	21"	1, 2, MR2, ③ or OS4	12
LRAD1716	17	16	14	10	5-1/2*	21"	1, 2, MR2, ③ or OS4	8
LRAD1720	17	20	17	20	5-1/2*	21"	1, 2, MR2, ③ or OS4	12
LRAD1722	17	22	13-1/2	16	5-1/2*	21"	1, 2, MR2, ③ or OS4	13
LRAD1918	19	18	16	11-1/2	5-1/2*	24"	1, 2, MR2, ③or OS4	10
LRAD1919	19-1/2	19	16	13-1/2	5-1/2*	24"	1, 2, MR2, ③ or OS4	11
† LRAD2022	! 19-1/2	22	16	16	5-1/2*	24"	1, 2, MR2, ③ or OS4	15
LRAD2219	22	19-1/2	18	14	5-1/2*	27"	1, 2, MR2, 3, 4 or 5	13
† LRAD2222	. 22	22	19	16	5-1/2*	30"	1, 2, MR2, ③ or OS4	14
LRAD2521	25	21-1/4	21	15-3/4	5-1/2*	30"	1, 2, MR2, 3, 4 or 5	15
LRAD2522	25	22	21	15-3/4	5-1/2*	30"	1, 2, MR2, 3, 4 or 5	15
LRAD3122	: 31	22	28	16	5-1/2*	36"	1, 2, MR2, 3, 4 or 5	19
DLR15171	0 15	17-1/2	12	12	10	18"	1, 2, MR2 or ③	12
DLR19191	0 19-1/2	19	16	13-1/2	10-1/8	24"	1, 2, MR2, ③ or OS4	15
† DLR221910) 22	19-1/2	18	14	10-1/8	27"	1, 2, MR2, ③, 4 or 5	14
DLR252210	25	22	21	15-3/4	10-1/8	30"	1, 2, MR2, ③, 4 or 5	19
† DLR252212	2 25	22	21	15-3/4	12-1/8	30"	1, 2, MR2, ③, 4 or 5	19



LR15173



LRAD19193



DLR2522121

LR1716, LR2522, DLR191910 and DLR252210 underside is fully protected by heavy duty Sound Guard® undercoating. Other sinks are fully undercoated.

Indicates standard number of faucet holes.

For a complete listing of Elkay sinks for use in a wide variety of general applications, visit elkay.com.

^{*} Also available with 6 or 6-1/2 inch bowl depths.

^{**} Not available with our Quick-Clip mounting system.



Lustertone® and Pacemaker® Lavatory Sinks

- 18 gauge stainless steel (model LLVR1916)
- 20 gauge stainless steel (model PSLVR1916)
- Bowl depth: 6"
- With overflow assembly
- Drain opening: 1-1/2"
- Arranged for standard lavatory type drain fitting







	Model Number		all Size hes) W	L	Bowl Siz (inches) W	ze D	Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
	LLVR1310	16	12-1/2	13-5/8	10-1/8	5-3/4	21	-	7
	LLVR19	19	19	14	14	7	24	1, 2, ③ or CS3	10
†	LLVR1916	19-5/8	16-3/4	15-1/2	11-3/8	6	24	1, 2, ③ or CS3	8
F	PSLVR1916	19	17	15-1/2	11-3/8	6	24	1, 2, 3 or CS3	8
F	PSLVR1917	19	17	16	11-1/2	6-1/8	24	1, 2, 3 or (CS3)	9-1/2
	RLLVR12	14-3/8	12	12	12	6	18	-	7
	RLLVR16	18-3/8	16	16	16	8	24	=	13

^() Indicates standard number of faucet holes.

Specialty Sinks

- 16 gauge, Type 316 stainless steel
- lacktriangle Self-rim design with crimped edges
- Drain is 1-1/2" IPS x 2-1/4" long Type 316 stainless steel
- Available in 3 sizes:

CUPR 4 (4" bowl, 6-3/8" overall, 3 lbs.) CUPR 5 (5" bowl, 7-3/8" overall, 3 lbs.)

CUPR 6 (6-1/2" bowl, 8-7/8" overall, 4 lbs.)

LLVR1916CS3

CUPR4

Model Number	Overall Size (inches) L W	L	Bowl Siz (inches) W	e D	Minimum Cabinet Size	Faucet Holes	Shipping WT. LBS.
CUPR4	6-3/8 Dia.	4	4	4	-	=	3
CUPR5	7-3/8 Dia.	5	5	4	-	-	3
CUPR6	8-7/8 Dia.	6-1/2	6-1/2	5	-	=	4

For a complete listing of Elkay sinks for use in a wide variety of general applications, visit elkay.com.





With Elkay, Anything is Possible

As demonstrated in the pages of this catalog, Elkay offers an extensive line of stainless steel sinks for just about every commercial application. However, sometimes a sink's function and size is far from standard, and a **custom** product is required. With an exacting attention to detail and our superior hand fabrication capabilities, our custom department is able to create almost anything. And as the world's leading stainless steel sink source, we have what it takes to see your one-of-a-kind design through to perfection.











COUNTERTOPS

Elkay custom counter- tops and custom sink tops are fabricated to your exact specifications from the finest stainless steel. Built to provide the most seamless appearance possible, Elkay Custom Countertops feature one-piece construction, which is welded, ground and polished smooth in place with intersections of 1/4" radius. And our custom countertops and custom sink tops are available with a satin lustrous hand polished or matte finish, each providing a stunning look that stands the test of time.

SCULLERY

The Elkay scullery sinks in the Foodservice and Service and Utility sections of this catalog can handle most commercial kitchen requirements; but if you need one that is wider or narrower, deeper or shallower, or with a different size drainboard or backsplash, we will make it just for you! For detailed information on our custom scullery sink capabilities, please contact your Elkay sales representative. Note: Non-standard hole configurations for our Sturdibilt and Weldbilt models can be seen on page 51.

MODIFIED STANDARD INSTITUTIONAL

Our custom sink capabilities go beyond countertops and scullery sinks. In fact, it extends throughout our entire commercial line. So if you have a unique application in the lavatory, or need a one-of-a kind sink for your service area, give us a call. We have the ability to hand fabricate a bowl to the exact size, shape and depth that you require.

YOU IMAGINE IT. WE BUILD IT.

Elkay offers a revolutionary capability that allows you to design stainless steel, one-of-a-kind creations. Our new Elkay Technology Center sets you free to design plumbing fixtures that turn what your customers envision into reality.

SPECIALTY SINKS

In addition to our custom sink production abilities, Elkay offers an array of products for special applications including sacristy sinks, cup sinks and **stainless steel cabinet sink tops and lavatory tops** for cabinet, wall mounting or leg support installations.

Sacristy Sinks are 18 gauge, Type 304 stainless steel. The cover has a piano type hinge, cross, cylinder lock and keys. Many of our general use models can be modified for use as a sacristy sink.

So if your sink applications stray a bit from the norm, don't worry ... with Elkay, anything is possible. Our custom team will help find the simplest, most cost-effective solutions and provide assistance throughout the process of your order. To learn more **contact your Elkay sales representative**, visit elkayusa.com or call our Custom Department at 630.574.8570.



Elkay® Custom Solutions General Use Sinks

Build on your imagination. Elkay® custom sinks are fabricated to your specifications, from 14, 16 or 18 gauge, Type 304 or 316 stainless steel for durability.

Built to provide the most seamless appearance possible, all feature seamless one-piece construction, welded, ground, and polished by hand to a satin finish for a stunning look that stands the test of time.

Available Categories

Sink tops / Countertops

- Straight
- L-Shaped
- U-Shaped



- Drop-In
- Undermount





Custom Commercial Designs (Legs or wall mounted)

- Scullery
- Scrub Sinks
- Floor Mop Sinks



For a quick quote contact:

630-574-8570

CIS@elkay.com





FAUCETS

LK800GN05T4

Chrome plated deck mount sink faucet with 4" wristblade handles. 5" gooseneck spout and 2.2 GPM vandal resistant aerator standard with .5 GPM insert included. Solid brass construction. Adjustable mounting up to 8" spread. Quarter turn ceramic disc cartridge. Includes spout swing restriction pin. ADA Compliant. Ship Wt. 6.5 lbs.

Available with 6" wristblade handles (LK800GN05T6)

LK940GN04L2H Chrome plated 8" centerset wall mount sink faucet with 2" lever handles, 4" gooseneck spout and 2.2 GPM vandal resistant aerator standard with .5 GPM insert included. Solid brass construction. Quarter turn ceramic disc cartridge. Includes spout swing restriction pin. ADA Compliant. Ship Wt. 6.25 lbs.

LK940GN08T4H Chrome plated 8" centerset wall mount sink faucet with 4" wristblade handles, 8" gooseneck spout and 2.2 GPM vandal resistant aerator standard with .5 GPM insert included. Solid brass construction. Quarter turn ceramic disc cartridge. Includes spout swing restriction pin.

ADA Compliant. Ship Wt. 6 lbs.

Available with 6" wristblade handles (LK940GN08T6H)

.K940BR03L2H Rough chrome finish 8" centerset wall mount service sink faucet with 2" lever handles, and threaded hose spout with bucket hook. Solid brass construction. Quarter turn ceramic disc cartridge, 1/2" NPT female inlet. ADA Compliant. Ship Wt. 7.5 lbs.

LK940BR07L2H Rough chrome finish 8" centerset wall mount service sink faucet with

2" lever handles, threaded hose spout with bucket hook and wall support arm. Solid brass construction. Quarter turn ceramic disc cartridge.

1/2" NPT female inlet. ADA Compliant. Ship Wt. 8.75 lbs.

LK69CP Chrome plated brass service sink faucet with cross arm handle, 1/2" IPS

female flanged inlet, plain outlet. Ship Wt. 1 lb.

LK69CH Chrome plated brass service sink faucet with cross arm handle, 1/2" IPS

female flanged inlet, 3/4" hose thread outlet. Ship Wt. 1 lb.

LK69C (Pair) Includes (1) hose threaded outlet and (1) plain outlet. Chrome

plated brass, 1/2" IPS female flange inlets. Ship Wt. 2 lbs.

LKD232SBH5C Chrome plated 8" centerset concealed deck mounted faucet with 5" brass

blade handles. 5-5/8" gooseneck spout. 2.2 GPM aerator, removable cartridges, and water saving flow restrictor. ADA Compliant.

Ship Wt. 7 lbs.



LK940BR03L2H

LKB940C







LK69CH



LKD232SBH5C



ELECTRONIC DECK MOUNT

- Dual power AC and battery
- Adjustable sensor range
- Gooseneck spout
- 2.0 gpm laminar flow aerator
- Chrome plated finish
- Solid brass construction
- Vandal-resistant and water-resistant sensor control module
- Adjustable shut-off delay
- Adjustable time-out feature









LKB721C

ELECTRONIC WALL MOUNT

- Dual power AC and battery
- Adjustable sensor range
- Gooseneck spout
- 2.0 gpm laminar flow aerator
- Chrome plated finish
- Solid brass construction
- Vandal-resistant and water-resistant sensor control module
- Adjustable shut-off delay
- Adjustable time-out feature





Model Number	Spout Reach	Power	Shipping WT. LBS
LKB722C	5-3/8"	AC/Battery	8







LK723

BACKSPLASH MOUNTING KIT

LKMK462

For installation of wall-mount faucets onto stainless steel backsplash. Includes 2 ea. of 1/2" nipples, 1/2" NPT by 1/2" sweat ells, washers and lock nuts. 1 lb.

SENSOR OPERATED **FAUCET ACCESSORIES**

Mixing Valves



LK724

Anti-scald thermostatic mixing valve with nickel plated brass body, 1/2" SWT inlets LK723 and outlet connections, check valves on inlets and mixed temperature range of 80°-120°F. Certified under ASSE 1016.

Ship Wt. 2 lbs.

LK724 Mechanical mixing valve with C.P. brass body, 1/2" inlets and outlet connections,

and check valves on inlets. Ship Wt. 1 lb.



VALVES AND SPOUTS

Knee Action and Foot Pedal Valves

Chrome plated wall hung **knee operated valve**, 1/2" I.P.S. inlets and 3/8" IPS outlet, with LK397C

enameled iron wall bracket and mounting package. Mounting package includes (2) stops, (2) valves and (2) wall flanges, tapped for 1/2" IPS inlets and outlets Ship Wt. 14 lbs.

LK398C Chrome plated wall hung double foot pedal valve

(14" from wall to tip of pedals), 1/2" IPS inlets and 3/8" IPS outlet, and mounting package. Mounting package includes (2) angle stops and wall flanges.

Ship Wt. 9 lbs.

LK399A Rough chrome plated floor mount double foot

pedal valve, tapped 1/2" IPS inlets and 1/2" IPS outlet. Pedals are CP and color indexed. Ship Wt. 3 lbs.



Spouts for use with Knee Action and **Foot Pedal Valves**



Chrome plated **back mount** swing 8-1/4" high gooseneck spout with vandal-resistant anti-hose aerator (4-7/8" from wall to outlet), and 1/2" IPS female flanged inlet. Furnished with 1/2" male thread by 1/2" SWT copper brass elbow, 1/2" nipple, washer, and locknut. Ship Wt. 3 lbs.



Chrome plated **deck mount** rigid 10-3/4" high gooseneck spout with vandal-resistant anti-hose aerator (6-1/4" from base to spout outlet) and 1/2" ID coupling nut. Ship Wt. 3 lbs.





3-1/2" DRAIN FITTINGS

Chrome plated brass with rubber stopper and 1-1/2" O.D. 4" chrome plated brass tailpiece. Ship Wt. 1 lb. LK2

Chrome plated with 3" perforated grid strainer and 1-1/2" O.D. 4" chrome plated brass **LK18**

tailpiece. Ship Wt. 1 lb.

LK18B Same as LK18, except with Type 304 stainless

steel body, strainer and tailpiece. Ship Wt. 1 lb.

Same as LK18, except with chrome plated brass offset 1-1/2" O.D. 4" tailpiece. ADAE Compliant. Ship Wt. 2 lbs. LKAD18

LKVR18 Same as LK18, except with 3" vandal-resistant

perforated grid strainer. Ship Wt. 1 lb.

LKVR18B Same as LK18B, except with 3"

vandal-resistant perforated grid strainer.

Ship Wt. 1 lb.

LK35

Strainer for **3-1/2" opening**, 4-1/2" top diameter. Stainless steel body, conical stainless steel basket strainer with flex stem and rubber stopper. Chrome plated brass 1-1/2" O.D. 4"

tailpiece. Ship Wt. .5 lb.

LK35B All stainless steel duo strainer for 3-1/2"

opening, 4-1/2" top diameter.

Stainless body, conical stainless steel basket strainer with flex stem and rubber stopper. Brass coupling nut and 1-1/2" O.D. 4 stainless steel tailpiece. Ship Wt. 1 lb.

LKAD35 Similar to LK35, except comes with chrome

plated brass offset drain, 1-1/2" O.D.

4" tailpiece. ADA Compliant. Ship Wt. 2.75

lbs.

LK173

Adjustable "P" trap standard for 3-1/2" opening, cast iron enameled inside, 3" iron pipe outlet with bronze cleanout plug and floor

support flange with adjustable nipple.

Chrome plated metal perforated grid strainer. Ship Wt. 20 lbs.

LK335 Same as LK35B, except Type 316

stainless steel.

LK372 Same as LK18B, except Type 316

stainless steel.



LK2



LK18



LKAD18



LK35



LKAD35



LK173



LK335

LK372







LK177







Chrome plated stamped brass drain outlet fitting for **2" opening**, 3" top diameter with 2" perforated grid strainer and 1-1/2" O.D. 4" tailpiece. Ship Wt. .75 lb. LK8

LK9 Same as LK8, except with 1-1/4" O.D. tailpiece. Ship Wt. .75 lb.

Chrome plated brass beehive strainer for $\bf 2"$ opening with 1-1/2" O.D. 4" brass tailpiece. Ship Wt. 1.5 lbs. LK177

LK337 Same as LK8, except Type 316 stainless steel. Ship Wt. .75 lb.





LKAD174

Chrome plated brass lavatory drain outlet fitting with perforated grid. Arranged for overflow. **1-1/2" opening** and 1-1/4" overall diameter. Comes with chrome plated cast brass elbow and

1-1/4" O.D. chrome plated brass offset tailpiece.

ADA Compliant. Ship Wt. 1.25 lbs.

LKAD174LO Same as LKAD174 except not arranged for overflow. Ship Wt. 1 lb.

LK174 Chrome plated brass lavatory drain outlet fitting, arranged for

overflow, **1-1/2" opening** with perforated grid and 1-1/4" O.D. 6" tailpiece. Ship Wt. 1 lb.

LK174LO Same as LK174 except not arranged for overflow. Ship Wt. 1 lb.

CuVerro® antimicrobial copper lavatory drain outlet fitting, arranged for overflow, **1-1/2" opening** with perforated grid and 1-1/4" O.D. 6" tailpiece. Ship Wt. 1 lb. **LK174-CU**

LK174LO-CU Same as LK174LO except made with CuVerro®, antimicrobial

copper. Not arranged for overflow. Ship Wt. 1 lb.

LK175 Chrome plated brass drain outlet fitting, arranged for overflow,

1-1/2" opening with rubber stopper, ring, chain and

1-1/4" O.D. 5" tailpiece. Ship Wt. 1 lb.



I K99

3-1/2" DRAIN FITTING

LK99 Drain outlet fitting, removable conical basket for 3-1/2" opening,

4-1/8" O.D. top stainless steel flange



3-1/2" DRAIN FITTINGS with LEVER HANDLE

LK24RT Rotary lever operated drain outlet fitting for 3-1/2" opening,

4-1/8" O.D. top stainless steel flange with brass body, stainless steel perforated grid, chrome plated brass 1-1/2" O.D. 4" tailpiece and stainless steel lever arm. Ship Wt. 4 lbs.

LK25RT Same as LK24RT, except with chrome plated brass 2" O.D.

4" tailpiece. Ship Wt. 4 lbs.

LK27 Lever operated drain outlet fitting for 3-1/2" opening, 4-1/2"

O.D. top stainless steel flange with brass body, conical stainless steel basket strainer with flex stem and rubber stopper, and chrome plated brass, 1-1/2" O.D. 4" tailpiece. Ship Wt. 3 lbs.



3-1/2" DRAIN FITTINGS with LEVER HANDLE and OVERFLOW

LK86RT Same as LK24RT, except with 1-1/4" O.D. chrome plated

brass connected overflow with stainless steel overflow

faceplate. Ship Wt. 6 lbs.

LK87RT Same as LK86RT, except with chrome plated brass 2" O.D.

4" tailpiece. Ship Wt. 6 lbs.



DRAIN FITTINGS with STANDPIPE OVERFLOW

LK20

Chrome plated brass drain fitting for **3-1/2" opening**, 4-1/2" O.D. top diameter with 1-1/2" O.D. 11" high standpipe, rubber stopper, and 1-1/2" O.D. 4" tailpiece. Ship Wt. 2 lbs.

LK273

Stainless steel drain fitting for **2" opening**. 2-13/16" O.D. top diameter with 1-1/2" O.D. 13-1/8" high stainless steel standpipe, rubber stopper and 1-1/2" O.D. chrome plated

brass 4" tailpiece. Ship Wt. 2 lbs.

LK373

Type 304 stainless steel drain outlet fitting with rubber stopper for **3-1/2" opening** with overall flange size of 4-1/2", 1-1/2" O.D. tailpiece and 5-1/4" removable stand pipe with "O" ring. Ship Wt. 2 lbs.



CONTINUOUS WASTE DRAIN CONNECTIONS

LK52 Chrome plated brass 1-1/2" O.D. continuous waste for two

compartment sinks (30" center to center sink outlets) with center outlet, brass coupling nuts and 1-1/2" O.D. 4" tailpiece.

Ship Wt. 2.75 lbs.

LK53 Same as LK52, except end outlet. Ship Wt. 2.5 lbs.

Chrome plated brass 1-1/2" O.D.continuous waste for three compartment sinks (30" center to center to center sink outlets) **LK60**

with center outlet, brass coupling nuts and 1-1/2" O.D. 4"

tailpiece. Ship Wt. 5 lbs.

LK76 Same as LK60, except with end outlet. Ship Wt. 4.5 lbs.

LK290 Chrome plated brass tubing and tailpiece. Center outlet. For

triple bowl sinks with offset center drain. 1-1/2" O.D. Ship Wt. 5 lbs.

Chrome plated cast brass 1-1/2" O.D. "P" trap with cleanout LK500

plug, 1-1/2" O.D. tubing waste arm to wall and wall flange.

Ship Wt. 1.5 lbs.









LKUMSK36



Sturdibilt® and Weldbilt® Scullery Sinks with Non-Standard Hole Configurations

Single Compartment Scullery Hole Chart






and 1 overflow hole (OF) (MODEL NUMBER) OF 2





1-hole over compartment (MODEL NUMBER)1

Examples: SS 8124OF 2 and WNSF 8124OF 2


Double Compartment Scullery Hole Chart








2-holes over each compartment and 2 overflow holes (OF) (MODEL NUMBER) OF 4








Examples: SS 82300F_ and WNSF 82300F_





Triple Compartment Scullery Hole Chart














Examples: SS 8372 LOF 3 and WNSF 8372 ROF 3 $\,$

Elkay Values

- We are in business forever
- Our strength is in our people
- We value quality in all we do
- Knowledge empowers
- Making a profit is an honorable endeavor
- Our word is our bond

American Pride. A Lifetime Tradition.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been an American-owned and operated company, providing thousands of jobs that support our families and communities. We are proud to say ELKAY USA.





Coast-To-Coast Elkay Sales Network

Our national sales presence and extensive distributor base provide excellent service and convenience. For the name of your nearest Elkay sales rep or wholesaler:

- Visit the "Where to Buy" area on elkay.com
- Call our customer service department at 630.572.3192

Elkay Technical Support

- Help is always just "One Call" away
- Trained factory technicians available during business hours,
 5 days a week
- 98% of technical service inquiries handled on the first call

Visit elkay.com

- Up-to-date product specification sheets
- Current catalog and pricing
- Local sales rep locator
- Warranty information
- Where to buy our products
- Service information
- How to contact Elkay

Throughout the birth and growth of the Elkay plumbing products group, the leadership and vision of Elkay's founders has always been maintained: provide better customer service, higher quality and more innovation than our competitors. Our sinks are no exception. We invite you to learn more about our products and services.

Contact Information

Website: elkay.com

Corporate Headquarters:

630.574.8484

Customer Service: 630.572.3192

Fax: 630.574.5012

2222 Camden Court

Oak Brook, Illinois 60523