


8000

strut nut w/o spring

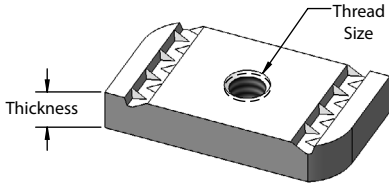


Materials/Finishes:	Zinc Plated (8000Z)
	T-304 Stainless (8000SS)
	T-316 Stainless (8000SX)

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
#8-32	1/4	0.06
#10-24	1/4	0.06
#10-32	1/4	0.06
1/4	1/4	0.06

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
5/16	3/8	0.09
3/8	3/8	0.09
7/16	3/8	0.09
1/2	3/8	0.09
5/8	1/2	0.13
3/4	1/2	0.13
7/8	1/2	0.13

8050

strut nut w/ short spring

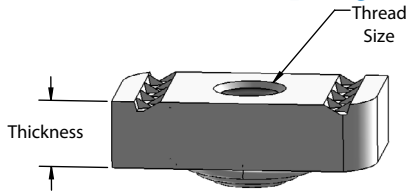


Materials/Finishes:	Zinc Plated (8050Z)	
	T-304 Stainless (8050SS)	
	T-316 Stainless (8050SX)	

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
#8-32	1/4	0.07
#10-24	1/4	0.07
#10-32	1/4	0.07
1/4	1/4	0.07

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
5/16	3/8	0.06
3/8	3/8	0.09
7/16	3/8	0.09
1/2	3/8	0.09
5/8	1/2	0.10

8100

strut nut w/ regular spring

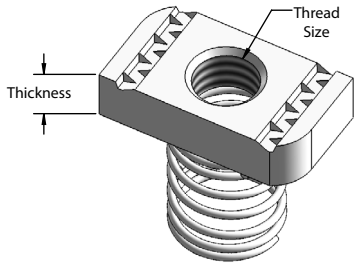


Materials/Finishes:	Zinc Plated (8100Z)
	T-304 Stainless (8100SS)
	T-316 Stainless (8100SX)
Notes:	Not to be used on 13/16" or 1" Strut.

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
#8-32	1/4	0.75
#10-24	1/4	0.75
#10-32	1/4	0.75
1/4	1/4	0.70

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
5/16	3/8	0.100
3/8	3/8	0.100
7/16	3/8	0.100
1/2	3/8	0.120
5/8	1/2	0.150
3/4	1/2	0.150
7/8	1/2	0.150

8150

top spring strut nut

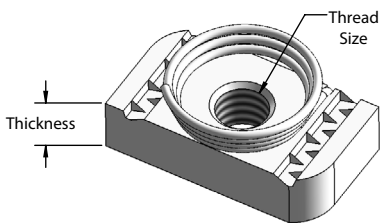

Materials/Finishes:	Zinc Plated (8150Z)
	T-304 Stainless (8150SS)
	T-316 Stainless (8150SX)
Notes:	To be used on 1-3/8" & 1-5/8" strut.

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
#8-32	1/4	0.07
#10-24	1/4	0.07
#10-32	1/4	0.07
1/4	1/4	0.07

ROD (THREAD) SIZE	THICKNESS	WGT EACH (lbs)
5/16	3/8	0.10
3/8	3/8	0.10
1/2	3/8	0.12

PROJECT INFORMATION			APPROVAL STAMP	
Project:			Notes:	
Address:				
Contractor:				
Engineer:				
Date:				
Approved	Approved as Noted	Not Approved		