



# PE300 Power Extender

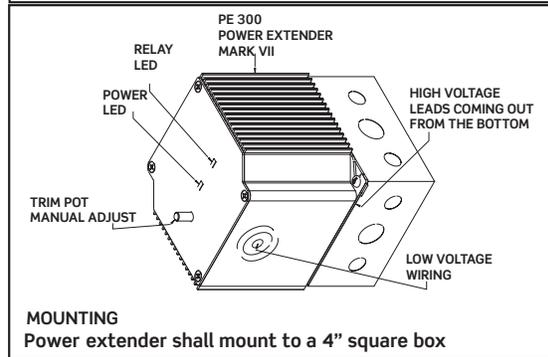

## DIMENSIONS & MOUNTING

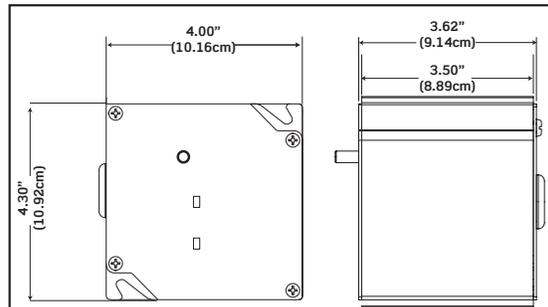

## DESCRIPTION


Leviton's PE300 Power Extender allows a dimming zone's power handling capacity to be extended to full control of a 20A circuit. The PE300 will drive 0-10VDC dimmable fluorescent ballasts such as Advance Mark VII 0-10V, OSRAM Sylvania Quicktronic Helios or equivalent ballasts.

## FEATURES

- Works with low-voltage non-dimmable and dimmable electronic ballasts, such as Advance Mark VII 0-10V, OSRAM Sylvania Quicktronic Helios or equivalent ballasts
- Low-end trim available for setting the minimum brightness level
- The PE300 will emulate the characteristics of the dimmer that it is connected to in terms of dimming range and resolution
- Works with any Dimensions® Multizone Controller to extend load capacity on any zone
- 0-10V Max Sink Load: 200mA (~100 ballasts)



## INSTALLATION

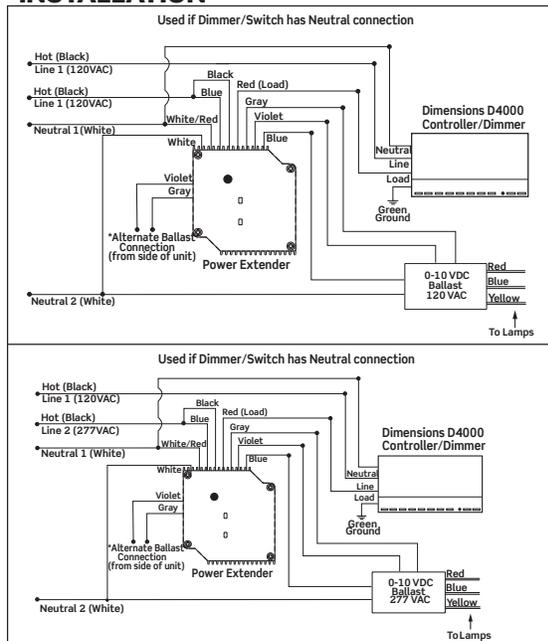

PE300 Power Extender

**SPECIFICATIONS**

<b>ELECTRICAL</b>	
Input Voltage	108VAC to 305VAC, 60Hz
Load Rating	20A-2400 VA@120VAC, 5500VA@277VAC Fluorescent
Power Consumption	6W@120VAC max, 18W@277VAC max
Dimmer Input	120V 60Hz
Testing/Code Compliance	UL Listed, CSA Certified and FCC Part 15
<b>PHYSICAL</b>	
Color	Metallic silver
Size	4.3"L x 4.0"W x 3.6"H (10.92cm x 10.16cm x 9.14cm)
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32-151°F (0-55°C)
Storage Temperature Range	14-185°F (-10-85°C)
Relative Humidity	20%-90% non-condensing
<b>COMPATIBILITY</b>	
For Box-Mounted Dimmers	Must use a 120V, 600W Incandescent version from the following families: IllumaTech™, Mural™, True Touch™, ToggleTouch™, TouchPoint™ and Home Controls
For Monet™ Installations	Use a 120V, 600VA Monet Magnetic Low Voltage dimmer (requires a Neutral wire)
For dimmers that include a Neutral wire (such as some scene-capable dimmers)	The dimmer Neutral wire must be connected
For Architectural Systems	Works with all families
<b>OTHER</b>	
Warranty	Limited 2-Year warranty

**ORDERING INFORMATION**

<b>CAT. NO.</b>	<b>DESCRIPTION</b>
PE300-D0W	PE 300 Power Extender, 120 or 277V input, 120V 2400VA Output (or 277V 5500VA) for 0-10VDC Electronic Ballasts

**Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation**

20497 SW Teton Avenue, Tualatin, OR 97062 **tel** 800-736-6682 **fax** 503-404-5594 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

**Leviton Manufacturing Co., Inc. Global Headquarters**

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **fax** 800-832-9538 **tech line** (8:30AM-7:00PM ET Mon-Fri) 800-824-3005

**Visit our Website at: [www.leviton.com/architecturalcontrols](http://www.leviton.com/architecturalcontrols)**

©2015 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.