


Self-Test GFCI Duplex Receptacles

Extra Heavy-Duty Industrial Specification Grade
 Tamper-Resistant and Non-Tamper-Resistant
 15 A and 20 A, 125 V

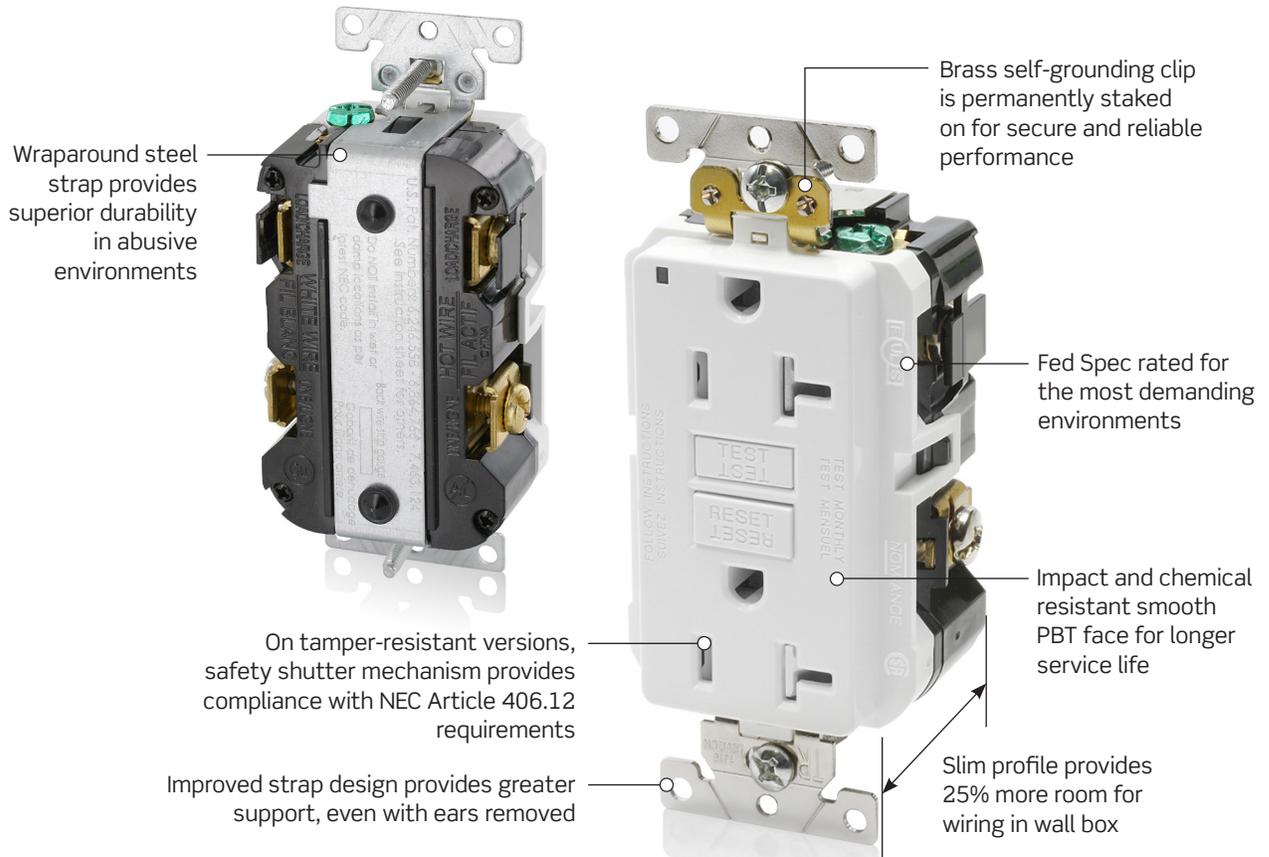

Patented SmartlockPro® protection detects and prevents against line-load reversal miswiring, and prevents resetting when ground fault protection has been lost

Common Applications

- Educational Facilities
- Multiple Dwelling Units
- Hospitality Venues
- Commercial Office Spaces


Ordering Information

Description		Non-Tamper-Resistant		Tamper-Resistant	
Ratings		15 A / 125 V	20 A / 125 V	15 A / 125 V	20 A / 125 V
NEMA Configuration		NEMA 5-15R	NEMA 5-20R	NEMA 5-15R	NEMA 5-20R
ORDER ID	Brown	G5262	G5362	G5262-OT0	G5362-OT0
	Ivory	G5262-I	G5362-I	G5262-OTI	G5362-OTI
	White	G5262-W	G5362-W	G5262-OTW	G5362-OTW
	Black	G5262-E	G5362-E	G5262-OTE	G5362-OTE
	Gray	G5262-GY	G5362-GY	G5262-TGY	G5362-TGY
	Light Almond	G5262-T	G5362-T	G5262-OTT	G5362-OTT
	Red	G5262-R	G5362-R	G5262-OTR	G5362-OTR


Specifications

Description	Extra Heavy-Duty Industrial Grade GFCI Receptacles
AC Horsepower Rating	
At Rated Voltage	1 hp
Electrical Specifications	
Amperage	15 A or 20 A
Voltage	125 VAC
NEMA	5-15R or 5-20R
Grounding	Self-Grounding
Pole	2
Wire	3
Dielectric Voltage	Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06
Short Circuit Current Rating	10 kA
Trip Level	Class A, 5 mA plus or minus 1 mA
Temperature Rise	Max 30°C after 250 cycles OL at 200 percent rated current
Environmental Specifications	
Flammability	Rated V-0 per UL94
Relative Humidity	20% to 90% non-condensing
Operating Temperature	-35°C to 66°C
Material Specifications	
Face Material	PBT
Body Material	Polycarbonate
Line Contacts	Brass
Mounting Screws	Plated Steel
Strap Material	Galvanized Steel
Ground Clip	Brass
Shutter Mechanism (TR versions only)	Acetal
Mechanical Specifications	
Product ID	Ratings permanently marked on device
Standards & Certifications	
NEMA	WD-1 & WD-6
ANSI	C-73
Certification/Listing	UL, CSA, NOM-ANCE
Applicable Standards	UL 498 and 943, CSA C22.2 Nos. 42 and 144, FedSpec W-C-596
Guarantees	
Product Warranty	2 Year Limited

Dimensions

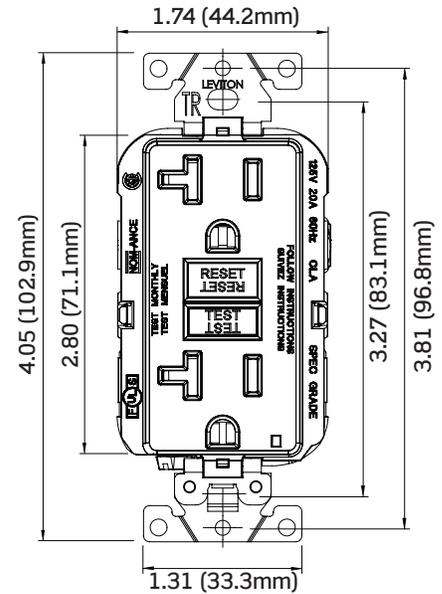

Front View

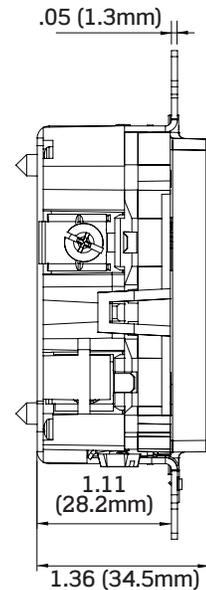

Side View

Visit our Website at:
www.leviton.com/receptaclegrades
 email: commercial@leviton.com

Q-1172

052319

Leviton Manufacturing Co., Inc.
 201 N Service Rd, Melville, NY 11747
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538
 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005
 © 2019 Leviton Manufacturing Co., Inc. All rights reserved.

