



Color: Ivory

UPC Code: 07847730045

Country Of Origin: Mexico

NEMA:  
5-20R



# 16352-LI

## Item Description

Decora Plus Duplex Receptacle Outlet, Commercial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Ivory

## Technical Information

### Electrical Specifications

**Dielectric Voltage Withstand:** 2000V minimum per UL 498

**Maximum Working Voltage:** 125V as rated

**Current Interrupting:** Certified for current interrupting at full rated current

**Temperature Rise:** Max 30C after 100 cycles OL at 150 percent rated current

**Amperage:** 20 A

**Grounding:** Self-Grounding

**Pole:** 2

**Voltage:** 125 VAC

**Wire:** 3

### Environmental Specifications

**Flammability:** Rated V-2 per UL 94

**Operating Temperature:** -40°C to 60°C

### Material Specifications

**Cover Material:** Thermoplastic

**Base Material:** Thermoplastic

**Mounting Strap:** Steel multipiece with 2 drive pins

**Power Contacts:** Brass, triple wipe

**Terminal Leads:** 6", #12 AWG THHN

**Grounding Leads:** 6", #12 AWG THHN

**Mounting Screws:** Triple Combination Head, Steel

**Wiring:** 1 Hot Lead, 1 Neutral Lead, 1 Ground Lead

### Mechanical Specifications

**Lead Identification:** Leads identified in accordance with UL 498 (black, white & green)

**Product ID:** Ratings are permanently marked on device

**Termination:** Pre-Wired Leads

### Product Features

**Grounding:** Self-Grounding

**Amperage:** 20 A

**Voltage:** 125 VAC

**NEMA:** 5-20R

**Pole:** 2

**Wire:** 3

**Terminal Leads:** 6", #12 AWG THHN

**Grounding Leads:** 6", #12 AWG THHN

**Color:** Ivory

**Standards and Certifications:** UL/CSA

**Warranty:** 10 Year Limited

**Device Type:** Duplex Receptacle Outlet

**Feature 4:** Smooth Face


**Grade:** Commercial Specification Grade

**Brand:** Decora Plus

## Features and Benefits

- Constructed with impact-resistant thermoplastic cover and body
- Dual drive pins for sturdy assembly
- Large, triple-wipe brass "T" contacts for superior contact pressure, outstanding conductivity
- #12 AWG THHN wire leads, 6" length
- Heavy gauge, locked-in wrap-around mounting strap
- Backed by a Limited 10-Year Warranty

### Wiring Diagram

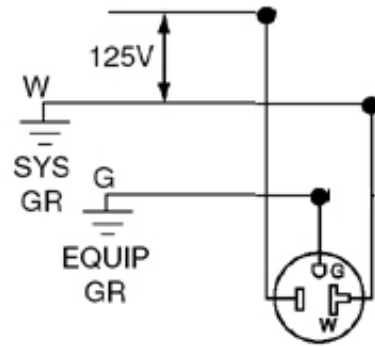

5-20R

### SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

#### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

#### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

