Component Specifications

Split M Block: 50-Pair

APPLICATION

Leviton's Split M Block provides up to 50 fixed cross-connections for voice, security and data applications. Designed for entrance facilities and telecommunications closets. Mounts to walls or backboards, Category 5 rated.

STANDARDS COMPLIANCE

Meets all applicable standards: UL listed; complies with TIA/EIA 568-B requirements and FCC Part 68.

PHYSICAL SPECIFICATIONS

Dimensions: 10.0"H x 3.4"W x 1.2"D

Materials: Block is made of fire-retardant plastic.

DESIGN CONSIDERATIONS

- Compact design for space-limited applications.
- Terminate 22-26 AWG solid insulated cable or 18-19 AWG solid stripped cable.
- · Mounts on wall or backboard.
- Route cable bundles adjacent to wiring base.
- Mount to Leviton 89 Stand-Off Brackets, providing space for routing cables behind each block.

WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to www.levitonvoicedata.com/warranty.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

The Split M Block shall provide 50 fixed cross-connections for voice, security and data applications. It shall be UL listed, comply with TIA/EIA 568-B and FCC Part 68 requirements and be made of fire-retardaSpnt plastic.







Split M Block: 50-Pair


Part Number 40066-M50

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images (.DXF, .DWG, MS-DOS.EPS)





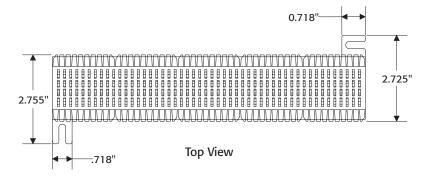

PART NUMBERS

Description	Part No.
Split M Block; 50-Pair	40066-M50



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005. Spec sheets and updates are also available at www.levitonvoicedata.com.

