

23CM-30

Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

20 Amp, 277 Volt, NEMA L7-20R, 2P, 3W, Flush Mtg Locking Receptacle, Industrial Grade, Grounding, Corrosion-Resistant - YELLOW

Technical Information

AC Horsepower Ratings

At Rated Voltage: 2 HP

Electrical Specifications

Grounding: Grounding

Amperage: 20 A

Voltage: 277 VAC

Pole: 2

Wire: 3

Dielectric Voltage: Withstands 2000V per UL498

Current Limiting: Full Rated Current

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Environmental Specifications

Flammability: Rated V-0 per UL 94

Operating Temperature: -40°C to 60°C

Environment: Corrosive

Material Specifications

Face Material: Nylon

Base Material: Nylon

Terminal Screws: Nickel-Plated Brass

Grounding Screw: Chromated Brass

Body Material: Valox 357

Cover Material: Valox 357

Line Contacts: Nickel-Plated Brass .040 Thick

Strap Material: Nickel-Plated Brass

Color: Yellow

Terminal Clamps: Nickel-Plated Brass

Ground Contacts: Nickel-Plated Brass

Mechanical Specifications

Terminal ID: Marked on Device

Terminal Accom.: 14-8 AWG

Product ID: Ratings and NEMA I.D. permanently marked on device

Termination: Back

Product Features

NEMA: L7-20R

Termination: Back

Face Material: Nylon

Base Material: Nylon

Color: Yellow

Warranty: Lifetime Limited

Brand: V-0-Max

Standards and Certifications

NEMA: WD-1 & WD-6

ANSI: C-73

UL: 498

UL Fed Spec: W-C-596

CSA: C22.2 No. 42

NOM: 057

Warranty

Warranty: Lifetime Limited



Color: Yellow


UPC Code: 07847710674

Country Of Origin: Mexico


NEMA:
L7-20R



Dimensional Diagram

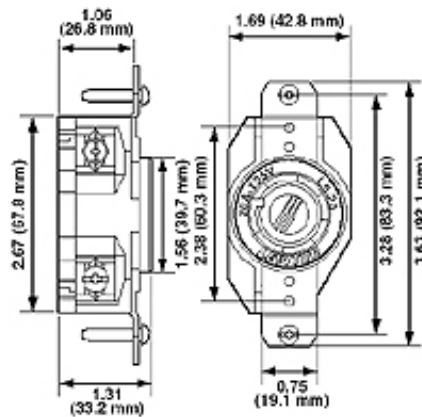

Wiring Diagram

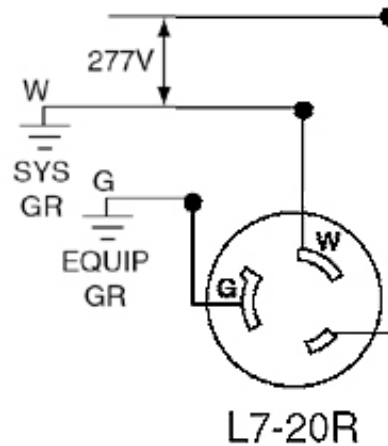

SPECIFICATION SUBMITTAL

| | | |
|-------------|------------------|--|
| JOB NAME: | CATALOG NUMBERS: | |
| | | |
| JOB NUMBER: | | |

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

