



Color: White

UPC Code: 07847730046

Country Of Origin: Mexico

NEMA:
5-20R



16352-LW

Item Description

Decora Plus Duplex Receptacle Outlet, Commercial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

Technical Information

Electrical Specifications

Current Interrupting: Certified for current interrupting at full rated current

Dielectric Voltage Withstand: 2000V minimum per UL 498

Maximum Working Voltage: 125V as rated

Temperature Rise: Max 30C after 100 cycles OL at 150 percent rated current

Amperage: 20 A

Grounding: Self-Grounding

Pole: 2

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Base Material: Thermoplastic

Cover Material: Thermoplastic

Grounding Leads: 6", #12 AWG THHN

Mounting Screws: Triple Combination Head, Steel

Mounting Strap: Steel multipiece with 2 drive pins

Power Contacts: Brass, triple wipe

Terminal Leads: 6", #12 AWG THHN

Wiring: 1 Hot Lead, 1 Neutral Lead, 1 Ground Lead

Mechanical Specifications

Lead Identification: Leads identified in accordance with UL 498 (black, white & green)

Product ID: Ratings are permanently marked on device

Termination: Pre-Wired Leads

Product Features

Amperage: 20 A

Color: White

Grounding: Self-Grounding

Grounding Leads: 6", #12 AWG THHN

NEMA: 5-20R

Pole: 2

Standards and Certifications: UL/CSA

Terminal Leads: 6", #12 AWG THHN

Termination: Pre-Wired Leads

Voltage: 125 VAC

Warranty: 10 Year Limited

Wire: 3

Device Type: Duplex Receptacle Outlet

Feature 4: Smooth Face


Grade: Commercial Specification Grade

Brand: Decora Plus

Features and Benefits

- Constructed with impact-resistant thermoplastic cover and body
- Dual drive pins for sturdy assembly
- Large, triple-wipe brass "T" contacts for superior contact pressure, outstanding conductivity
- #12 AWG THHN wire leads, 6" length
- Heavy gauge, locked-in wrap-around mounting strap
- Backed by a Limited 10-Year Warranty

Wiring Diagram

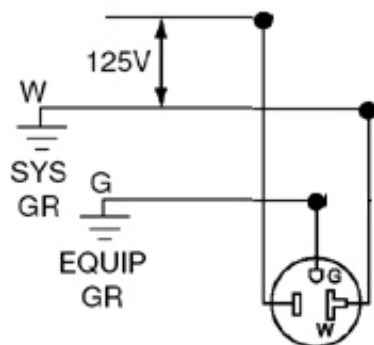

5-20R

SPECIFICATION SUBMITTAL

JOB NAME: <input style="width: 90%;" type="text"/> JOB NUMBER: <input style="width: 90%;" type="text"/>	CATALOG NUMBERS: <input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/> <input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/>
--	---

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

