



Color: Brown

UPC Code: 07847728394

Country Of Origin: Mexico

NEMA:
5-15R



8200-L

Duplex Receptacle Outlet, Heavy-Duty Hospital Grade, Smooth Face, 15 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Brown

Technical Information

AC Horsepower Ratings

At Rated Voltage: 1/2 HP

Horsepower Rating: 1/2 HP

Electrical Specifications

Amperage: 15 A

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Pole: 2

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125 VAC

Wire: 3

Grounding: Self-Grounding

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Body Material: Nylon

Bushing: Die Cast Aluminum

Color: Brown

Face Material: Nylon

Ground Clips: Brass-Plated

Grounding Leads: 6", #12 AWG THHN

Grounding Screw: 12GA THHN Green Wire Lead 6 Inch

Line Contacts: Phosphor Bronze

Mounting Screws: Steel

Strap Material: Steel

Terminal Leads: 6", #12 AWG THHN

Terminal Screws: 12GA THHN Wire Leads 6 Inch

Yoke: Zinc-Plated Steel

Mechanical Specifications

Lead Identification: Leads identified in accordance with UL 498

Product ID: Markings are permanently marked on device

Terminal ID: Black-Hot, Green-Ground, White-Neutral

Termination: Pre-Wired Leads

Product Features

Body Material: Nylon

Color: Brown

Device Type: Duplex Receptacle Outlet

Grade: Heavy-Duty Hospital Grade

Grounding: Self-Grounding

NEMA: 5-15R

Strap Material: Steel

Termination: Pre-Wired Leads

Warranty: 10-Year Limited

Feature 4: Smooth Face

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File 152105


NEMA: WD-6

NOM: 057


UL Fed Spec WC-596: File E13399

Warranty: 10-Year Limited

8200-L 15 AMP-125 VOLTS

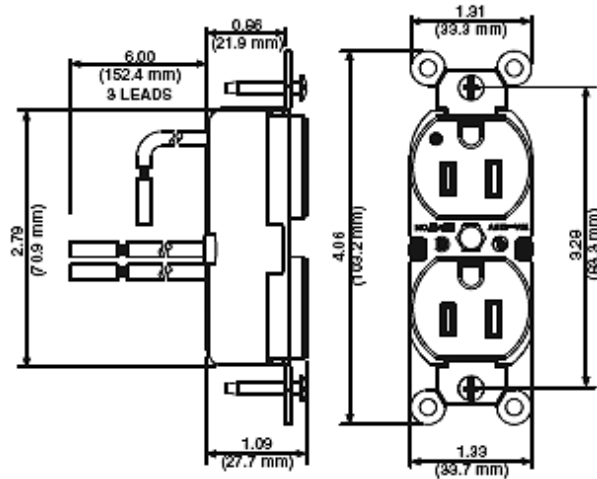

Wiring Diagram

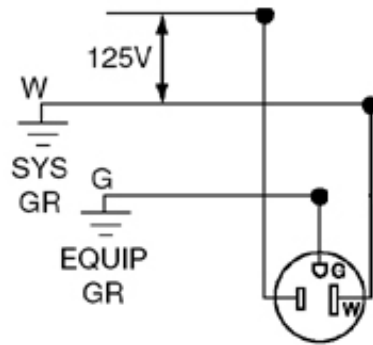

5-15R

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

