



Color: White

UPC Code: 07847725978

Country Of Origin: Mexico

NEMA:
5-20R



5362-LW

Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

Leviton's line of Extra Heavy-Duty Industrial Grade receptacles are designed and manufactured to withstand the harsh conditions typically associated with industrial environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, hospital grade, etc., these Industrial Grade devices are the electrical contractor's choice for use in factories, schools, hospitals and commercial office buildings.

Technical Information

AC Horsepower Ratings

At Rated Voltage: 1 HP

Electrical Specifications

Temperature Rise: Max 30C after 100 cycles OL at 150 percent rated current

Grounding: Self-Grounding

Amperage: 20 A

Voltage: 125 VAC

Pole: 2

Wire: 3

Dielectric Voltage Withstand: 2000V minimum per UL 498

Maximum Working Voltage: 125V as rated

Current Interrupting: Certified for current interrupting at full rated current

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Terminal Screws: 12GA THHN Wire Lead 6 Inch

Grounding Screw: 12GA THHN Green Wire Lead 6 Inch

Cover Material: Nylon

Base Material: Polycarbonate

Strap Material: Galvanized Steel with Riveted Ground Contacts

Line Contacts: Phosphor Bronze

Terminal Leads: 6", #12 AWG THHN

Grounding Leads: 6", #12 AWG THHN

Bushing: Die Cast Aluminum

Mounting Screws: Triple Combination Head, Steel

Wiring: 1 Hot Lead, 1 Neutral Lead, 1 Ground Lead

Color: White

Mechanical Specifications

Terminal ID: Black-Hot, White-Neutral, Green-Ground

Lead Identification: Leads identified in accordance with UL 498 (black, white & green)

Product ID: Ratings are permanently marked on device

Termination: Pre-Wired Leads

Product Features

NEMA: 5-20R

Termination: Pre-Wired Leads

Color: White

Device Type: Duplex Receptacle Outlet

Feature 4: Smooth Face

Grade: Heavy-Duty Industrial Specification Grade

Standards and Certifications

NEMA: WD-6

ANSI: C-73

UL 498: File E13399


UL Fed Spec WC-596: File E13399

CSA C22.2 No. 42: File 152105


NOM: 057

Warranty: 10 Year Limited

5362-L 20 AMP-125 VOLTS

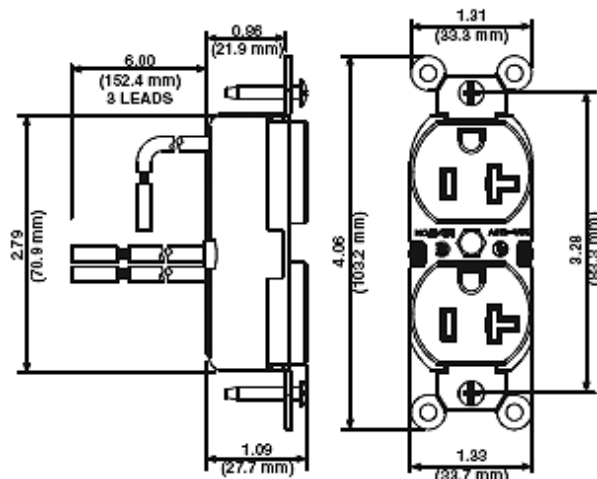

Wiring Diagram

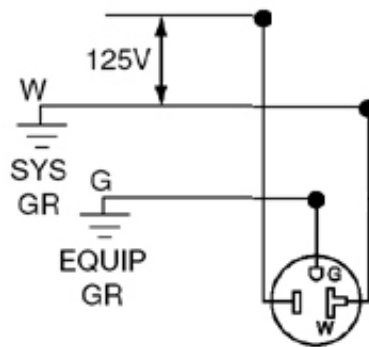

5-20R

SPECIFICATION SUBMITTAL

| | |
|----------------------|----------------------|
| JOB NAME: | CATALOG NUMBERS: |
| <input type="text"/> | <input type="text"/> |
| JOB NUMBER: | <input type="text"/> |

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

