



UPC Code : 078477954102

Country Of Origin : Please Contact Customer Service.

ODS0D-IDG

AutoON/AutoOFF PIR Occupancy Sensor (ManualON/AutoOFF selectable) lighting control, Vandal resistant PIR lens, Manual 2 Pole Wall Switches. Robust Dual Latching 10A Relays, No-Neutral wire required. Adjustable Service Switch: OFF/AUTO/ON (Keep in AUTO), 120/208/220/230/240/277VAC, 50/60hz, Field of View 2100 sq ft (Motion: Major 60'x40'; Minor 40'x20'), Dual Pyrometers for true 180 degree view with Blinders (32 degree block on each side). Adjustable time delay (in Adapting mode: 30s, 5/10/20m, Non-Adapting mode: 5/10/20/30m), Walk-through feature, Audible Beep Warn. Light Sensor (Photocell) included for Ambient Light Hold-Off feature. Daylighting: Classroom Mode (operates both relays) and Conference Room Mode (operates 2 relay after). CEC Title 20/24 compliant. Wall plate sold separately. Color: Gray.

The ODS0D uses passive infrared (PIR) technology to monitor a room for occupancy through a segmented Fresnel lens. This specialized lens divides the field-of-view into sensor zones. When a person passes into or out of a sensor zone, the sensor detects motion and switches two separate lighting loads ON. The lights will remain ON as long as there is an occupant moving through the sensor zones.

Technical Information

Product Features

Adjustment : Self-Adjusting
Code Compliance : California Title 24
Color : Grey
Consumption (mA) : N/A
Coverage (Sq.Ft.) : 2100
Device Type : Occupancy Sensor
Grade : Commercial
HVAC Relay : N/A
LED Color : Red
Load Rating : 800W@120V INC
 1200VA@120V 2700VA@277V FL
Mounting : Wall Switch
Mounting Height (Ft.) : 4 Ft.
Neutral Wire Connection : Not Required
Number of Relays : 2
Operating Temperature : 0°C to 50°C
Pattern : 180°
Photocell : Internal
Power Pack : External Power Pack Not Required

Product Line : ODS0D

Relative Humidity : 20% to 90% non-condensing
Secondary Relay : 800W@120V INC
 800VA@120V 1200VA@277V FL
Sensor Type : Wall Switch
Size : 4.06" H x 1.75" W x 1.85" D
 (103.2mm x 44.4mm x 47.2mm)
Standards and Certifications : UL/cUL
Storage Temperature Range : -10°C to 85°C
Switch Type : Single-Pole, Dual Relay
Technology : Passive Infrared
Time Delay : 30s-30m
Voltage : 120/277 VAC
Wallplate : Order Separately
Warranty : 5-Year Limited

Mechanical Specifications

Neutral Wire Connection : Not Required
Relay Type : Dual Relay
Switch Type : Single-Pole, Dual Relay

Electrical Specifications

Frequency : 60Hz
Voltage : 120/277 VAC

Features and Benefits


- Provides automatic switching for two separate banks of fluorescent, incandescent, or low-voltage lighting from a single unit.
- Convenient dual pushbuttons provide manual-ON/OFF light switching of each load at any time.
- ODS0D-ID Conference Room Mode—primary and secondary relays switch lighting to last ON/OFF status when personnel enter room, providing a consistent lighting level from one occupancy period to the next. Both relays respond to Ambient Light Override, preventing lights from turning ON automatically during

periods of ample natural light, for increased energy savings.

- ODS0D-ID Classroom Mode—both primary and secondary relays always switch lighting ON when personnel enter room, regardless of their ON/OFF status during last period of occupancy. Secondary relay only responds to Ambient Light Override—primary does not, ensuring that students and personnel never enter a darkened room.
- Presentation Mode feature for slide or film presentations allows push buttons to turn lights OFF and keep them OFF while the room is occupied.
- Auto adapting delayed-OFF time interval compensates for real-time occupancy patterns, preventing unnecessary ON/OFF switching.
- Exclusive Walk-Through feature provides increased energy savings by not leaving the lights ON for an extended period after only momentary occupancy.
- Non-Adaptive Mode disables Self-Adjusting Delayed-OFF Time and Walk-Through feature in applications where these features are not desired.
- Daylight harvesting light sensor measures the ambient light in the room when it first detects motion. It leaves the lights OFF if there is enough light in the room or turns the lights connected to the first relay ON if there is not enough light in the room.
- Low-profile design eliminates obtrusive “scanning-device” look. Elegant Decora wallplates complement any interior for sleek aesthetics; uses Decora wallplates and coordinates with Leviton's popular line of Decora wiring devices.
- 180° field-of-view provides approximately 2100 square feet of coverage, suitable for a variety of commercial areas.
- Segmented Fresnel lens provides optimum sensitivity and performance. Designed with an extensive “minor motion” area where even slight body movements will be detected.
- Horizontal field-of-view may be adjusted between 180° and 60° arc by using integral blinders located on either side of the lens. No mask-ing tape required.
- Time delay adjustment for delayed-OFF time settings of 30 seconds, 5, 10, and 30 minutes. Allows customized adjustments to maximize energy savings.
- Vandal resistant PIR lens.
- False detection circuitry.
- Light Sensor adjustable Ambient Light Override ranges from approximately 2FC (20 LUX) to 500+FC (5000+ LUX).
- Manual-ON/auto-OFF mode for installations where manual-ON switching is required but auto-OFF switching is still desired for CEC Title T24 energy savings.
- To comply with CEC Title 24, red LED indicator light flashes when PIR sensor detects motion to verify detection is active.
- Beep warn - unit beeps 3 times after delayed-OFF time expires, then waits 10 seconds before turning lights OFF.
- One unit can be used for 120V through 277V lighting. Compatible with both electronic and magnetic ballasts.
- Primary relay switches at the zero crossing point of the AC power curve to

ensure longer contact life and compatibility with electronic ballasts.

- Unit fits in standard single-gang wallbox and replaces two single-pole wall switches; ground connection required. Gangable with other devices.
- Exclusive Leviton H.I.S. Circuitry. Specifically designed to handle today's high inrush electronic ballast loads and offer unmatched durability and service.

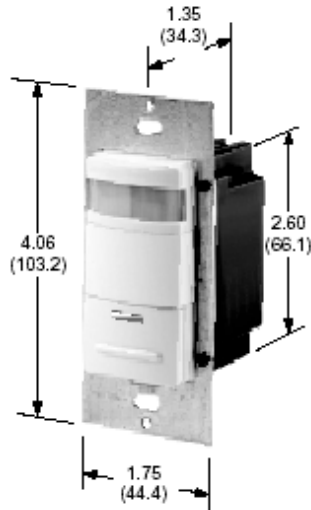

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

