



**Color :**  White


**UPC Code :** 078477898215

**Country Of Origin :** China

**RoHS Compliant :** Yes

**NEMA :**  5-15R

**Available Colors :**

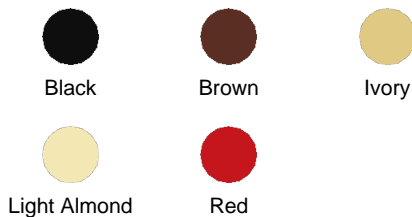

## G5262-TW

Self-Test Tamper-Resistant Industrial Grade GFCI

SmartlockPro Self-Test Tamper-Resistant GFCI Duplex Receptacle Outlet, Extra Heavy-Duty Industrial Specification Grade, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - White

Peace of mind, all the time. The SmartlockPro Self-Test GFCI tests itself even if you forget. Designed to meet the latest UL standard for auto-monitoring (self-test) our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that it can respond to a ground fault. With the slimmest profile on the market, the device allows for fast and easy installation, while Leviton's patented reset lockout mechanism prevents reset of the GFCI if it is not wired or operating correctly. The SmartlockPro Self-Test GFCI is the smart choice in ground fault circuit interrupter protection.

### Technical Information

AC Horsepower Ratings

**At Rated Voltage :** 1 HP

Electrical Specifications

**Amperage :** 15 A

**Grounding :** Self-Grounding

**Pole :** 2

**Short Circuit Current Rating :** 10kA

**Voltage :** 125 VAC

**Wire :** 3

Environmental Specifications

**Flammability :** Rated V-0 per UL 94

**Operating Temperature :** -35C to +66C

Material Specifications

**Body Material :** Polycarbonate

**Face Material :** PBT

**Ground Clips :** Brass

**Grounding Screw :** Plated Steel

**Line Contacts :** Brass

**Shutter Mechanism :** Delrin® Acetal

**Strap Material :** Galvanized Steel

**Terminal Clamp :** Brass

**Terminal Screws :** Plated Steel

Mechanical Specifications

**Product ID :** Ratings are permanently marked on device

**Termination :** Back or Side Wire

Product Features

**Brand :** SmartlockPro

**Color :** White

**Device Type :** Duplex Receptacle Outlet

**Feature :** Tamper-Resistant, Power Indication

**Function :** GFCI

**Grade :** Extra Heavy-Duty Industrial Specification Grade

**NEMA :** 5-15R

Standards and Certifications

**ANSI :** C-73



**Applicable Standards :** UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

**Certification/Listing :** UL, CSA, NOM-ANCE

**NEMA :** WD-1 & WD-6

Warranty

**Warranty :** 2-Year Limited

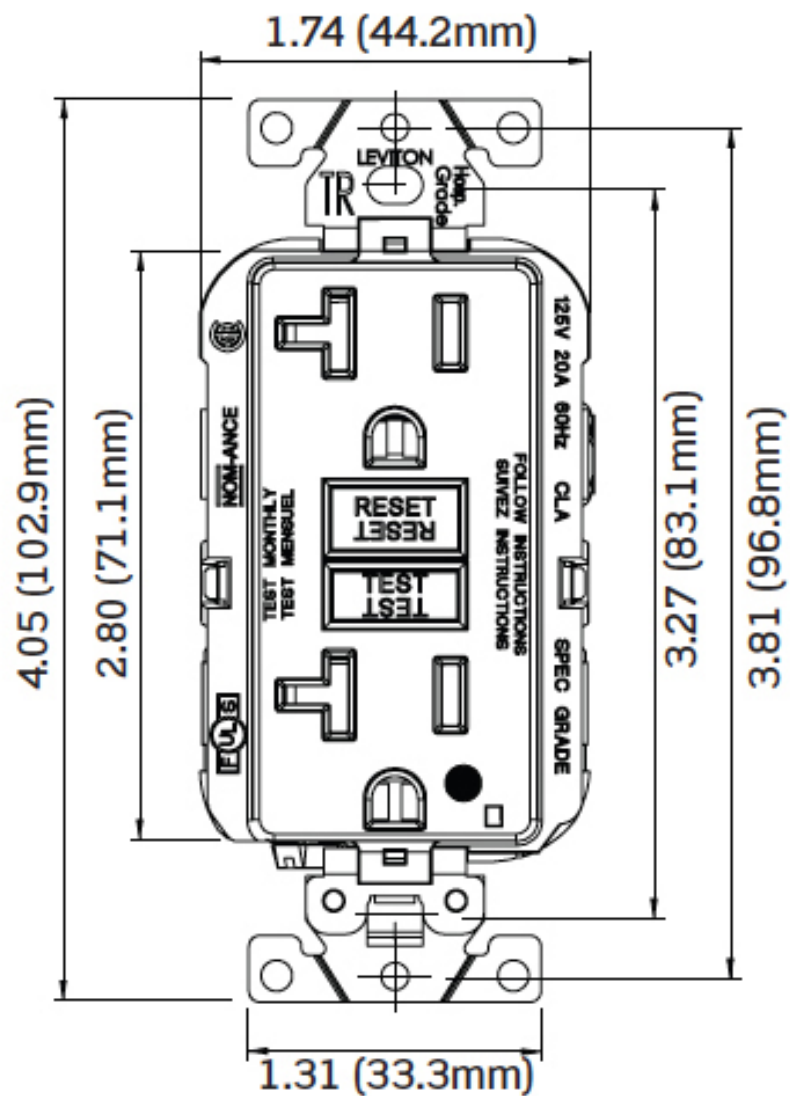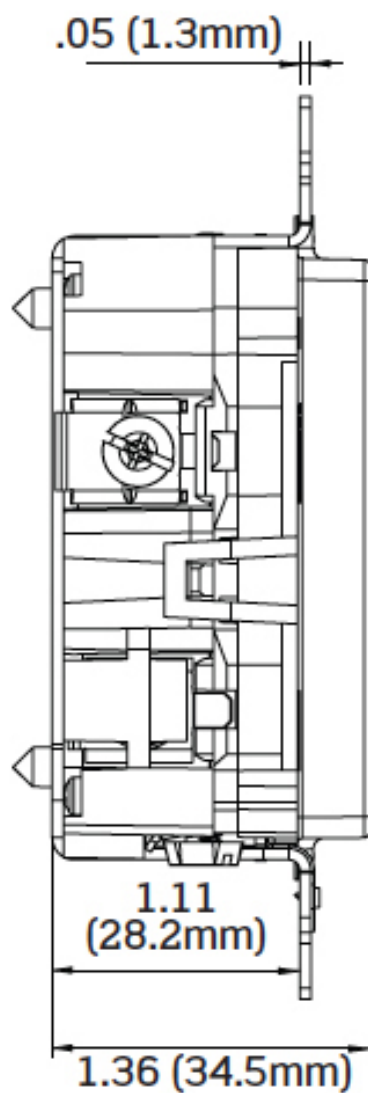

#### SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):  
+1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-  
1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

