





UPC Code: 07847710910
Country Of Origin: Mexico

NEMA: 5-15R



16262-PLI

Item Description

Decora Plus Duplex Receptacle Outlet, Extra Heavy-Duty Hospital Grade, Power Indication, Smooth Face, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Ivory

Technical Information

AC Horsepower Ratings
At Rated Voltage: 1/2 HP

Electrical Specifications

Amperage: 15 A

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Grounding: Self-Grounding

Pole: 2

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications **Body Material:** Nylon

Clamp Nuts: Zinc-Plated Steel

Color: Ivory

Face Material: Nylon

Ground Clips: Nickel-Plated Brass **Grounding Screw:** Nickel-Plated Brass

8-32

Line Contacts: Nickel-Plated Brass

Triple-Wipe .031 Thick

Strap Material: Nickel Plated Brass **Terminal Screws:** Nickel-Plated Brass

10-32

Yoke: Nickel-Plated Brass

Mechanical Specifications

Product ID: Ratings are permanently

marked on device

Terminal Accom.: 14-10 AWG

Terminal ID: Brass-Hot, Green-Ground,

Silver-Neutral

Termination: Back or Side Wire

Product Features

Brand: Decora Plus

Color: Ivory

Device Type: Duplex Receptacle Outlet

Grade: Extra Heavy-Duty Hospital

Grade

Grounding: Self-Grounding

NEMA: 5-15R

Feature 3: Power Indication
Feature 4: Smooth Face

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File 152105

NEMA: WD-6 **NOM**: 057


UL498HG: File E13399 **Warranty:** 10 Year Limited

Patents*


CA2465330 US6827602

MX250328

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

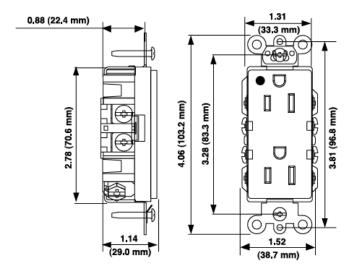

Wiring Diagram



5-15R

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:telefono: optimization} \textbf{Teléfono: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

