


Electric Actuator • AE-350



Double Acting • Nema 4x • Manual Override



AE-350


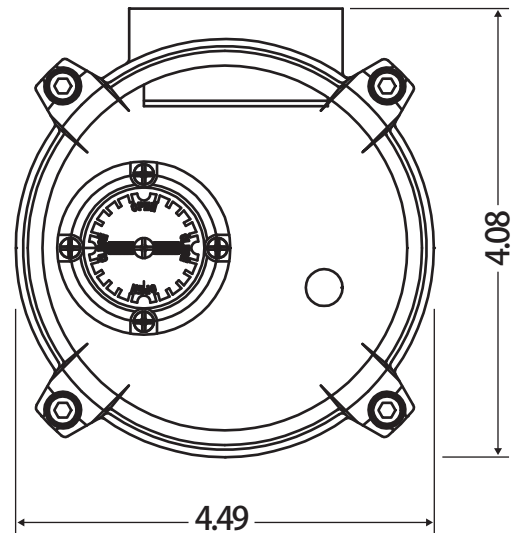


Features

- Hard anodized aluminum housing with external powder coating for severe duty applications
- Enclosure: IP66, O-ring sealed
- ISO 5211 mounting
- 90° operation
- Position indicator
- Manual override standard
- 120V / 1Ph / 60Hz
- Thermally protected induction motor
- Spring loaded terminal block for ease in wiring

Actuator Specs

Torque (in-lbs)	350
Output Square	0.55
ISO 5211 Mounting	F03 / F05 / F07
IEC Duty Cycle (S2)	Max 30 min
Operating Time, 90° @ 120V (secs)	12
Rated current @ 120V (Amp.)	0.27A
Motor Insulation Class	E
Weight (lbs)	6.6
Limit Switches	2 - 1 ea for Open & Close (3A, 250VAC)
Auxiliary Limit Switches	2 - 1 ea for Open & Close (3A, 250VAC)
Cable Entry	2 - PG 13.5
Internal Htr.	Yes - 5W
Temperature Range	-4° F to 158° F

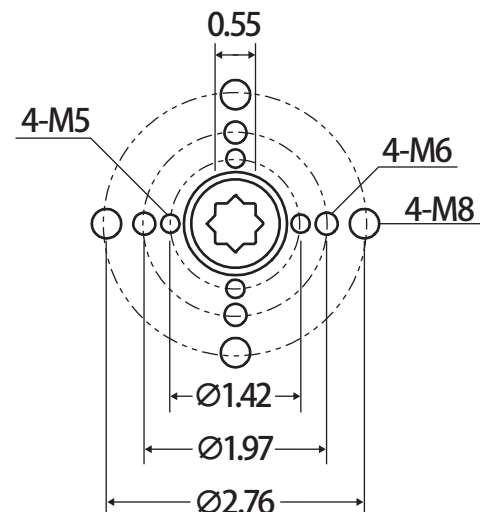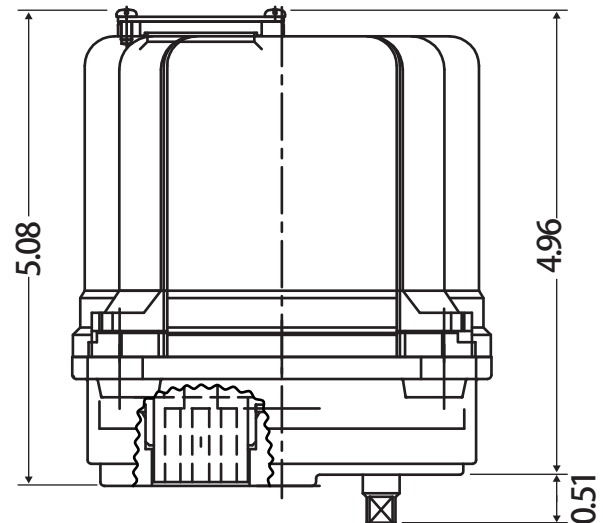

Electric Actuator • AE-350

Wiring Diagram

Incoming Power
AC 1PH (V)

