

UltraLED™ Strip Luminaire



Erich Bockley

UltraLED™ Strip Luminaire

Key Features and Benefits



Applications

- Office
- Stairwell
- Warehouse
- Education
- Low-bay

Application: Ideal in retrofit and new installations, the SYLVANIA UltraLED Strip Luminaire is intended for retail, manufacturing, warehouse, office, education, and low-bay applications.

- Light engine and lens module feature toolless removal and secure snap-fit for fast, efficient installation
- Diffuse lens delivers smooth, even illumination
- Knock-outs on both ends of fixture facilitate through wiring — Optional joiner bracket facilitates end-to-end mounting
- Motion/Daylight sensor and Battery Back-up options increase the versatility of this product line
- DLC Premium listing maximizes rebate opportunities
- Split junction box cover and V-hook mounting bracket included

Wattage	CCT (K)	Sizes	Voltage	Warranty
22W	3500K, 4000K, 5000K	2ft and 4ft	120-347 (UNH)*	5 years
34W	3500K, 4000K, 5000K	4ft	120-347 (UNH)*	5 years
44W	3500K, 4000K, 5000K	4ft and 8ft	120-277	5 years
68W	3500K, 4000K, 5000K	8ft	120-347 (UNH)*	5 years
96W	3500K, 4000K, 5000K	8ft	120-277	5 years

* EMBB versions are 120-277 only



UltraLED™ Strip Luminaire

Product Offering (Base Models)

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Size	Total Fixture Lumens	LPW	DLC	Options
65209	STRIP2A/022UNHD835/24U/WH	22	120-347	0-10V	>80	3500K	2ft	2860	130	Prm	—
65210	STRIP2A/022UNHD840/24U/WH	22	120-347	0-10V	>80	4000K	2ft	2860	130	Prm	—
65211	STRIP2A/022UNHD850/24U/WH	22	120-347	0-10V	>80	5000K	2ft	2860	130	Prm	—
65176	STRIP2A/022UNHD835/48U/WH	22	120-347	0-10V	>80	3500K	4ft	2860	130	Prm	—
65177	STRIP2A/022UNHD840/48U/WH	22	120-347	0-10V	>80	4000K	4ft	2860	130	Prm	—
65178	STRIP2A/022UNHD850/48U/WH	22	120-347	0-10V	>80	5000K	4ft	2860	130	Prm	—
65212	STRIP2A/034UNHD835/48U/WH	34	120-347	0-10V	>80	3500K	4ft	4420	130	Prm	—
65213	STRIP2A/034UNHD840/48U/WH	34	120-347	0-10V	>80	4000K	4ft	4420	130	Prm	—
65214	STRIP2A/034UNHD850/48U/WH	34	120-347	0-10V	>80	5000K	4ft	4420	130	Prm	—
65215	STRIP2A/044UNVD835/48U/WH	44	120-277	0-10V	>80	3500K	4ft	5720	130	Prm	—
65216	STRIP2A/044UNVD840/48U/WH	44	120-277	0-10V	>80	4000K	4ft	5720	130	Prm	—
65217	STRIP2A/044UNVD850/48U/WH	44	120-277	0-10V	>80	5000K	4ft	5720	130	Prm	—
65218	STRIP2A/044UNVD835/96U/WH	44	120-277	0-10V	>80	3500K	8ft	5720	130	Prm	—
65219	STRIP2A/044UNVD840/96U/WH	44	120-277	0-10V	>80	4000K	8ft	5720	130	Prm	—
65220	STRIP2A/044UNVD850/96U/WH	44	120-277	0-10V	>80	5000K	8ft	5720	130	Prm	—
65224	STRIP2A/068UNHD835/96U/WH	68	120-347	0-10V	>80	3500K	8ft	8840	130	Prm	—
65225	STRIP2A/068UNHD840/96U/WH	68	120-347	0-10V	>80	4000K	8ft	8840	130	Prm	—
65226	STRIP2A/068UNHD850/96U/WH	68	120-347	0-10V	>80	5000K	8ft	8840	130	Prm	—
65230	STRIP2A/096UNVD835/96U/WH	96	120-277	0-10V	>80	3500K	8ft	12480	130	Prm	—
65231	STRIP2A/096UNVD840/96U/WH	96	120-277	0-10V	>80	4000K	8ft	12480	130	Prm	—
65232	STRIP2A/096UNVD850/96U/WH	96	120-277	0-10V	>80	5000K	8ft	12480	130	Prm	—



UltraLED™ Strip Luminaire

Product Offering (Sensor Models)

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Size	Total Fixture Lumens	LPW	DLC	Options
65128	STRIP2A/022UNHD835/24U/WH/D	22	120-347	0-10V	>80	3500K	2ft	2860	130	Prm	Motion/Daylight Sensor
65129	STRIP2A/022UNHD840/24U/WH/D	22	120-347	0-10V	>80	4000K	2ft	2860	130	Prm	Motion/Daylight Sensor
65130	STRIP2A/022UNHD850/24U/WH/D	22	120-347	0-10V	>80	5000K	2ft	2860	130	Prm	Motion/Daylight Sensor
65179	STRIP2A/022UNHD835/48U/WH/D	22	120-347	0-10V	>80	3500K	4ft	2860	130	Prm	Motion/Daylight Sensor
65180	STRIP2A/022UNHD840/48U/WH/D	22	120-347	0-10V	>80	4000K	4ft	2860	130	Prm	Motion/Daylight Sensor
65181	STRIP2A/022UNHD850/48U/WH/D	22	120-347	0-10V	>80	5000K	4ft	2860	130	Prm	Motion/Daylight Sensor
65131	STRIP2A/034UNHD835/48U/WH/D	34	120-347	0-10V	>80	3500K	4ft	4420	130	Prm	Motion/Daylight Sensor
65132	STRIP2A/034UNHD840/48U/WH/D	34	120-347	0-10V	>80	4000K	4ft	4420	130	Prm	Motion/Daylight Sensor
65133	STRIP2A/034UNHD850/48U/WH/D	34	120-347	0-10V	>80	5000K	4ft	4420	130	Prm	Motion/Daylight Sensor
65134	STRIP2A/044UNVD835/48U/WH/D	44	120-277	0-10V	>80	3500K	4ft	5720	130	Prm	Motion/Daylight Sensor
65135	STRIP2A/044UNVD840/48U/WH/D	44	120-277	0-10V	>80	4000K	4ft	5720	130	Prm	Motion/Daylight Sensor
65136	STRIP2A/044UNVD850/48U/WH/D	44	120-277	0-10V	>80	5000K	4ft	5720	130	Prm	Motion/Daylight Sensor
65137	STRIP2A/044UNVD835/96U/WH/D	44	120-277	0-10V	>80	3500K	8ft	5720	130	Prm	Motion/Daylight Sensor
65138	STRIP2A/044UNVD840/96U/WH/D	44	120-277	0-10V	>80	4000K	8ft	5720	130	Prm	Motion/Daylight Sensor
65139	STRIP2A/044UNVD850/96U/WH/D	44	120-277	0-10V	>80	5000K	8ft	5720	130	Prm	Motion/Daylight Sensor
65143	STRIP2A/068UNHD835/96U/WH/D	68	120-347	0-10V	>80	3500K	8ft	8840	130	Prm	Motion/Daylight Sensor
65144	STRIP2A/068UNHD840/96U/WH/D	68	120-347	0-10V	>80	4000K	8ft	8840	130	Prm	Motion/Daylight Sensor
65145	STRIP2A/068UNHD850/96U/WH/D	68	120-347	0-10V	>80	5000K	8ft	8840	130	Prm	Motion/Daylight Sensor
65149	STRIP2A/096UNVD835/96U/WH/D	96	120-277	0-10V	>80	3500K	8ft	12480	130	Prm	Motion/Daylight Sensor
65150	STRIP2A/096UNVD840/96U/WH/D	96	120-277	0-10V	>80	4000K	8ft	12480	130	Prm	Motion/Daylight Sensor
65151	STRIP2A/096UNVD850/96U/WH/D	96	120-277	0-10V	>80	5000K	8ft	12480	130	Prm	Motion/Daylight Sensor



UltraLED™ Strip Luminaire Product Offering (EM Models)

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Size	Total Fixture Lumens	LPW	DLC	Options
65182	STRIP2A/022UNVD835/48U/WH/E	22	120-277	0-10V	>80	3500K	4ft	2860	130	Prm	Emergency Battery Back-up
65183	STRIP2A/022UNVD840/48U/WH/E	22	120-277	0-10V	>80	4000K	4ft	2860	130	Prm	Emergency Battery Back-up
65184	STRIP2A/022UNVD850/48U/WH/E	22	120-277	0-10V	>80	5000K	4ft	2860	130	Prm	Emergency Battery Back-up
65155	STRIP2A/034UNVD835/48U/WH/E	34	120-277	0-10V	>80	3500K	4ft	4420	130	Prm	Emergency Battery Back-up
65156	STRIP2A/034UNVD840/48U/WH/E	34	120-277	0-10V	>80	4000K	4ft	4420	130	Prm	Emergency Battery Back-up
65157	STRIP2A/034UNVD850/48U/WH/E	34	120-277	0-10V	>80	5000K	4ft	4420	130	Prm	Emergency Battery Back-up
65158	STRIP2A/044UNVD835/48U/WH/E	44	120-277	0-10V	>80	3500K	4ft	5720	130	Prm	Emergency Battery Back-up
65159	STRIP2A/044UNVD840/48U/WH/E	44	120-277	0-10V	>80	4000K	4ft	5720	130	Prm	Emergency Battery Back-up
65160	STRIP2A/044UNVD850/48U/WH/E	44	120-277	0-10V	>80	5000K	4ft	5720	130	Prm	Emergency Battery Back-up
65161	STRIP2A/044UNVD835/96U/WH/E	44	120-277	0-10V	>80	3500K	8ft	5720	130	Prm	Emergency Battery Back-up
65162	STRIP2A/044UNVD840/96U/WH/E	44	120-277	0-10V	>80	4000K	8ft	5720	130	Prm	Emergency Battery Back-up
65163	STRIP2A/044UNVD850/96U/WH/E	44	120-277	0-10V	>80	5000K	8ft	5720	130	Prm	Emergency Battery Back-up
65167	STRIP2A/068UNVD835/96U/WH/E	68	120-277	0-10V	>80	3500K	8ft	8840	130	Prm	Emergency Battery Back-up
65168	STRIP2A/068UNVD840/96U/WH/E	68	120-277	0-10V	>80	4000K	8ft	8840	130	Prm	Emergency Battery Back-up
65169	STRIP2A/068UNVD850/96U/WH/E	68	120-277	0-10V	>80	5000K	8ft	8840	130	Prm	Emergency Battery Back-up
65173	STRIP2A/096UNVD835/96U/WH/E	96	120-277	0-10V	>80	3500K	8ft	12480	130	Prm	Emergency Battery Back-up
65174	STRIP2A/096UNVD840/96U/WH/E	96	120-277	0-10V	>80	4000K	8ft	12480	130	Prm	Emergency Battery Back-up
65175	STRIP2A/096UNVD850/96U/WH/E	96	120-277	0-10V	>80	5000K	8ft	12480	130	Prm	Emergency Battery Back-up



UltraLED™ Strip Luminaire

Product Offering (EM + Sensor Models)

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Size	Total Fixture Lumens	LPW	DLC	Options
65185	STRIP2A/022UNVD835/48U/WH/DE	22	120-277	0-10V	>80	3500K	4ft	2860	130	Prm	Sensor + EMBB
65186	STRIP2A/022UNVD840/48U/WH/DE	22	120-277	0-10V	>80	4000K	4ft	2860	130	Prm	Sensor + EMBB
65187	STRIP2A/022UNVD850/48U/WH/DE	22	120-277	0-10V	>80	5000K	4ft	2860	130	Prm	Sensor + EMBB
65188	STRIP2A/034UNVD835/48U/WH/DE	34	120-277	0-10V	>80	3500K	4ft	4420	130	Prm	Sensor + EMBB
65189	STRIP2A/034UNVD840/48U/WH/DE	34	120-277	0-10V	>80	4000K	4ft	4420	130	Prm	Sensor + EMBB
65190	STRIP2A/034UNVD850/48U/WH/DE	34	120-277	0-10V	>80	5000K	4ft	4420	130	Prm	Sensor + EMBB
65191	STRIP2A/044UNVD835/48U/WH/DE	44	120-277	0-10V	>80	3500K	4ft	5720	130	Prm	Sensor + EMBB
65192	STRIP2A/044UNVD840/48U/WH/DE	44	120-277	0-10V	>80	4000K	4ft	5720	130	Prm	Sensor + EMBB
65193	STRIP2A/044UNVD850/48U/WH/DE	44	120-277	0-10V	>80	5000K	4ft	5720	130	Prm	Sensor + EMBB
65194	STRIP2A/044UNVD835/96U/WH/DE	44	120-277	0-10V	>80	3500K	8ft	5720	130	Prm	Sensor + EMBB
65195	STRIP2A/044UNVD840/96U/WH/DE	44	120-277	0-10V	>80	4000K	8ft	5720	130	Prm	Sensor + EMBB
65196	STRIP2A/044UNVD850/96U/WH/DE	44	120-277	0-10V	>80	5000K	8ft	5720	130	Prm	Sensor + EMBB
65200	STRIP2A/068UNVD835/96U/WH/DE	68	120-277	0-10V	>80	3500K	8ft	8840	130	Prm	Sensor + EMBB
65201	STRIP2A/068UNVD840/96U/WH/DE	68	120-277	0-10V	>80	4000K	8ft	8840	130	Prm	Sensor + EMBB
65202	STRIP2A/068UNVD850/96U/WH/DE	68	120-277	0-10V	>80	5000K	8ft	8840	130	Prm	Sensor + EMBB
65206	STRIP2A/096UNVD835/96U/WH/DE	96	120-277	0-10V	>80	3500K	8ft	12480	130	Prm	Sensor + EMBB
65207	STRIP2A/096UNVD840/96U/WH/DE	96	120-277	0-10V	>80	4000K	8ft	12480	130	Prm	Sensor + EMBB
65208	STRIP2A/096UNVD850/96U/WH/DE	96	120-277	0-10V	>80	5000K	8ft	12480	130	Prm	Sensor + EMBB

UltraLED™ Strip Luminaire Accessories and Notes

Item Number	Ordering Abbreviation	Item Description
60574	LNHIBA2A/ACCABLEMT	Aircraft Cable Mount
65302	STRIP2A/JOINBRKT	End-to-End Joiner Bracket
65305	STRIP2A/REMOTE	Remote Control for Sensor


- The UltraLED Strip luminaire family is intended to replace the existing SYLVANIA Strip luminaire family



Luminaire with Cable
Mount accessory
NAED 60574



65302

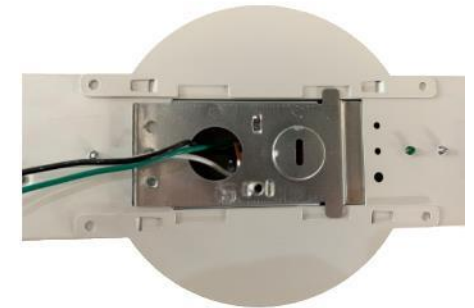

Split Junction Box
cover (included)

UltraLED™ Strip Luminaire

Nomenclature Review

Ordering Guide

STRIP	2A	/	XXX	UNX	D	8	XX	/	XX	U	/	WH
Product Name	Generation		Wattage	Voltage	Dimming	CRI	Color Temp		Length	Mounting		Color/Finish
Strip = Strip Luminaire	2A = Generation 2A		22 = 22 Watts 34 = 34 Watts 44 = 44 Watts 68 = 68 Watts 96 = 96 Watts	UNV = 120-277V UNH = 120-347V	D = 0-10V Dimming	8 = >80	35 = 3500K 40 = 4000K 50 = 5000K		24 = 24 inches 48 = 48 inches 96 = 96 inches	U = Universal Mounting		WH = White

UltraLED™ Strip Luminaire

Key Takeaways

- Available in 2', 4', and 8' Lengths
- Light engine and lens module feature toolless removal and secure snap-fit for fast, efficient installation
- Diffuse lens delivers smooth, even illumination
- Knock-outs on both ends of fixture facilitate through wiring — Optional joiner bracket facilitates end-to-end mounting
- Motion/Daylight sensor and Battery Back-up options increase the versatility of this product line
- DLC Premium listing maximizes rebate opportunities
- Split junction box cover and V-hook mounting bracket included



THANK YOU