







UPC Code: 07847799542

19D24-R

Brand Features

The 19 Series Ball Nose connectors and panel receptacles are insulated for water tightness and safety. They allow you to quickly connect or disconnect equipment. They have become the industry standard for multiple operator stations, distribution panels, stress relieving and numerous other applications.

Item Description

19 Series Cam-Type Female Detachable Plug, Industrial Grade, Double Set Screw Termination, Ball Nose, Cable Range-350-500MCM, 690 Amp - RED

Technical Information

Electrical Specifications Max. Amperage: 690 Amp Max. Voltage: 600 Volt

Material Specifications

Sleeve Material: Santroprene TPV

Contact Material: Brass Strain Relief: Copper Wire Mechanical Specifications

Gender: Female


Connection Type: Double Set Screw Cable Range: 350-500MCM AWG

Product Features

Cable Range: 350-500MCM AWG

Color: Red

Contact Cat. No.: 19D24-C Insulator Cat. No.: 19SDF-R

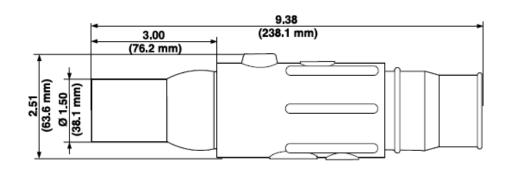

Female Detachable Plug - Double Set Screw

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747
Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

