





UPC Code: 07847710913
Country Of Origin: Mexico

**NEMA:** 5-20R



# 16362-PLI

#### **Item Description**

Decora Plus Duplex Receptacle Outlet, Extra Heavy-Duty Hospital Grade, Power Indication, Smooth Face, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Ivory

#### **Technical Information**

AC Horsepower Ratings
At Rated Voltage: 1 HP
Electrical Specifications

Amperage: 20 A

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V

per UL498

**Grounding:** Self-Grounding

Pole: 2

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications **Body Material:** Nylon

Clamp Nuts: Zinc-Plated Steel

Color: Ivory

Face Material: Nylon

**Ground Clips:** Nickel-Plated Brass **Grounding Screw:** Nickel-Plated Brass

8-32

Line Contacts: Brass Triple-Wipe

0.040" Thick

Strap Material: Nickel Plated Brass
Terminal Screws: Nickel-Plated Brass

10-32

Yoke: Nickel-Plated Brass

Mechanical Specifications

Product ID: Ratings are permanently

marked on device

Terminal Accom.: 14-10 AWG

Terminal ID: Brass-Hot, Green-Ground,

Silver-Neutral

Termination: Back or Side Wire

Product Features

Brand: Decora Plus

Color: Ivory

**Device Type:** Duplex Receptacle Outlet **Grade:** Extra Heavy-Duty Hospital

rade. L

**Grounding:** Self-Grounding

**NEMA:** 5-20R

Feature 3: Power Indication
Feature 4: Smooth Face

Standards and Certifications

**ANSI:** C-73

CSA C22.2 No. 42: File 152105

**NEMA**: WD-6 **NOM**: 057


**UL498HG:** File E13399 **Warranty:** 10 Year Limited

#### Patents\*


CA2465330 US6827602

MX250328

\*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

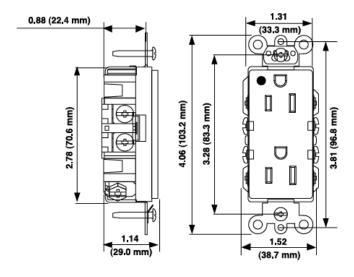

# Wiring Diagram



5-20R

# SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:temperature} \textbf{Teléfono: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$ 

## Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

### Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

