



Color: White

UPC Code: 07847788057 Country Of Origin: Mexico

1256-W

15 Amp, 120/277 Volt, Toggle Double-Throw Ctr-OFF Momentary Contact Single-Pole AC Quiet Switch, Extra Heavy Duty Spec Grade, Grounding, Back & Side Wired, -

Leviton's Industrial Grade AC toggle switches for extra heavy-duty applications represent top-of-the-line quality and peak performance. Leviton uses the finest materials available and the highest production standards to produce industrial switches of unmatched versatility and reliability.

Technical Information

AC Horsepower Ratings

HP Rating: 1/2HP-120V 2HP-240V-

Max. Amperage: 12 Amp

Electrical Specifications

Amperage: 15 A

Voltage: 120/277 VAC **Grounding:** Self-Grounding

Dielectric Voltage: Withstands 1500V

for 1 minute

Overload UL20 Test: 100 cycles of OL

at 4.8 times rated current

Temperature Rise: Maximum 30

degrees C rise

Endurance: 50,000 cycles minimum

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 65°C

Material Specifications

Strap Material: Steel

Base Material: Thermoplastic

Toggle: Polycarbonate

Cover Material: Thermoplastic Contact Material: Silver Alloy Terminal Screws: Brass 8-32 Grounding Screw: Brass 8-32

Ground Clips: Brass

Color: White

Mechanical Specifications

Terminal ID: Brass-Hot Black-Hot

White-Neutral Green-Gnd

Terminal Accom.: 14-#10 AWG back wired; #14-#12 AWG side wired Product ID: Ratings are permanently

marked on device

Torque Range: 12-14 inch pounds Termination: Back or Side Wire

Product Features Color: White

Grounding: Self-Grounding

Feature: Momentary Contact CTR OFF

Voltage: 120/277 VAC

HP Rating: 1/2HP-120V 2HP-240V-

277V

Body Material: Thermoplastic

Strap Material: Steel

Grade: Extra Heavy-Duty Industrial

Specification Grade Function: Single-Pole

Device Type: Toggle Switch Standards and Certifications

NEMA: WD-1 & WD-6

ANSI: C-73

UL Fed Spec WS896E: File #E7458


UL Standard: UL 20

CSA C22.2 No. 111: File #152105


NOM: 057

RoHS: Compliant

Warranty: 10 Year Limited

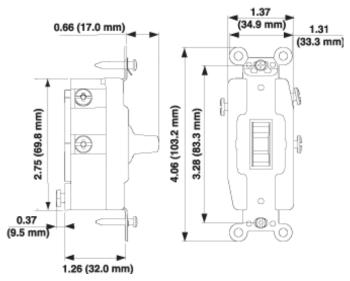

Wiring Diagram Single-Pole, Double Throw (SPDT) Center OFF



SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:temperature} \textbf{Telephone: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

