



UPC Code: 07847706510

Country Of Origin: United States

NEMA:
24-15R

14W15

Brand Features

The Leviton line of straight blade plugs and connectors includes: Black and White industrial grade devices that resist impact, corrosion and chemicals; Wetguard for water or moisture resistance; Dustgard for dust and dirt; Python, with an innovative interlocking design; rugged nylon flanged and outlets; and integrated inlets and outlets with weather resistant covers.

Item Description

15 Amp, 347 Volt, NEMA 24-15P, 2P, 3W, Plug, Straight Blade, Industrial Grade, Grounding, Wetguard - YELLOW

Technical Information

Product Features

Amperage: 15 A

Assembly Screws: Stainless Steel 300

Blades/Contacts: Nickel-Plated Brass

Body Material: EPTR Rubber

Brand: Wetguard

Color: Yellow

Cord Range: .375 - .655

Grounding: Grounding

NEMA: 24-15R

Pole: 2

Standards and Certifications: UL/CSA

Voltage: 347 VAC

Warranty: Lifetime Warranty

Wire: 3

Wire Gauge: 18-10 AWG

Device Type: Straight Blade Plug


Environmental Specifications

Environment: Wet

Features and Benefits

- Corrosion resistant, watertight, and dust tight connector – NEMA Type 3, 3S, 4, 4X, 6, &6P
- Meets IP66 and IP67 standards when mated with a Wetguard connector or inserted in to a corrosion resistant receptacle with a Wetguard flip lid. Plug caps are available to protect the plug when not used
- Corrosion resistant, nickel-plated brass blades and terminal screws plus non-magnetic stainless steel face module screws
- Amperage, voltage, and NEMA configuration are molded into the face module making identification and replacement faster and easier
- Interlocking tongue and groove construction between face module and housing prevents moisture and debris from passing around the face module during use
- Santoprene EPTR housing, grommet, and closure cap resist water, most acids, alkalis, grease, oil, and solvents. EPTR offers enhanced UV stability and resists fungal growth
- Innovative strain relief and cord sealing system features a deep fluted compression nut, strain relief washer, and EPTR grommet for most reliable seal
- Available in high visibility yellow

Dimensional Diagram

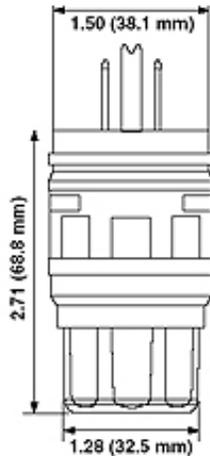

SPECIFICATION SUBMITTAL

JOB NAME: <input style="width: 95%; height: 20px;" type="text"/>	CATALOG NUMBERS: <input style="width: 95%; height: 20px;" type="text"/>	
JOB NUMBER: <input style="width: 95%; height: 20px;" type="text"/>	<input style="width: 95%; height: 20px;" type="text"/>	<input style="width: 95%; height: 20px;" type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

