

7379

50 Amp, 250 Volt DC/600 Volt AC, Non-NEMA, 3P, 4W, Black & White Locking Flush Mount Receptacle, Industrial Grade, Grounding - BLACK

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.



Color: Black



UPC Code: 07847780441

Country Of Origin: Mexico

NEMA:
Non-NEMA



Technical Information

Electrical Specifications

Amperage: 50 A

Current Interrupting: Certified for current interrupting at full rated current

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Dielectric Voltage Withstand: 2000V minimum per UL 498

Grounding: Grounding

Maximum Working Voltage: 250V DC/600V AC as rated

Pole: 3

Temperature Rise: Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Voltage: 250 VAC

Wire: 4

Environmental Specifications

Environment: Dry

Flammability: Rated V-0 per UL 94

Operating Temperature: -40°C to 75°C

Material Specifications

Assembly Rivets: SS 302/304

Back Cover: Reinforced Nylon

Base Material: Nylon

Body & Contract Carrier: Reinforced Nylon

Box Terminal: 0.062inch thick Copper

Clamp Nuts: Brass

Color: Black

Connector Contact - Binding Plate: 0.100inch thick Brass

Connector Contact - Spring: 0.041inch thick Brass

Contact Rivet: Brass

Face Material: Nylon

Face Module: Reinforced Nylon

Grounding Screw: Brass

Line Contacts: Brass

Mounting Screws: SS 302/304

Mounting Strap: Single piece SS 302/304

Shroud: .062inch thick Nickel Plated Steel

Terminal Screws: Brass

Terminal Set Screw: SS 302/304

Yoke: Brass

Mechanical Specifications

Product ID: Ratings and Catalogue No. molded into face

Terminal Accom.: #10min to #6max AWG Solid or Stranded Wire (Stranded Wire for Ground only)

Terminal ID: X, W, Y, Z and Green for ground

Product Features

Base Material: Nylon

Brand: Black and White

Color: Black

Face Material: Nylon

NEMA: Non-NEMA

Standards and Certifications: UL

Strap Material: Brass

Termination: Back & Side

Warranty: Lifetime Limited

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File 152105

NEMA: WD-6

NOM: 057


RoHS: Compliant

UL498: File E13399

UL 498: File E13399

UL Fed Spec WC-596: File E13399

Warranty: Lifetime Limited

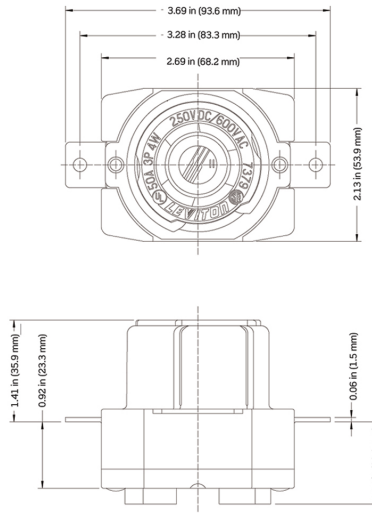

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/> JOB NUMBER: <input type="text"/>	CATALOG NUMBERS: <table border="1"> <tr> <td><input type="text"/></td> <td><input type="text"/></td> </tr> <tr> <td><input type="text"/></td> <td><input type="text"/></td> </tr> </table>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>				
<input type="text"/>	<input type="text"/>				

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

