




UPC Code: 07847725977

Country Of Origin: Mexico



# 5362-LI

Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Ivory

Leviton's line of Extra Heavy-Duty Industrial Grade receptacles are designed and manufactured to withstand the harsh conditions typically associated with industrial environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, hospital grade, etc., these Industrial Grade devices are the electrical contractor's choice for use in factories, schools, hospitals and commercial office buildings.

#### **Technical Information**

AC Horsepower Ratings At Rated Voltage: 1 HP

Electrical Specifications

Grounding: Self-Grounding

Amperage: 20 A

Voltage: 125 VAC Pole: 2

Wire: 3

Dielectric Voltage Withstand: 2000V minimum per UL 498

Maximum Working Voltage: 125V as rated

**Current Interrupting:** Certified for current interrupting at full rated current **Temperature Rise:** Max 30C after 100 cycles OL at 150 percent rated current

#### **Environmental Specifications**

Flammability: Rated V-2 per UL 94 Operating Temperature: -40°C to 60°C

Material Specifications

Cover Material: Nylon

Base Material: Polycarbonate Strap Material: Galvanized Steel with

Riveted Ground Contacts Line Contacts: Phosphor Bronze

Terminal Leads: 6", #12 AWG THHN

Grounding Leads: 6", #12 AWG THHN

Bushing: Die Cast Aluminum

Mounting Screws: Triple Combination Head, Steel

Wiring: 1 Hot Lead, 1 Neutral Lead, 1 Ground Lead

Color: Ivory

Mechanical Specifications

Lead Identification: Leads identified in accordance with UL 498 (black, white & green)

**Product ID:** Ratings are permanently marked on device

Termination: Pre-Wired Leads

Product Features NEMA: 5-20R

Color: Ivory


Device Type: Duplex Receptacle Outlet

Feature 4: Smooth Face Grade: Heavy-Duty Industrial Specification Grade

Standards and Certifications

NEMA: WD-6

ANSI: C-73 UL 498: File E13399 UL Fed Spec WC-596: File E13399 CSA C22.2 No. 42: File 152105 NOM: 057 Warranty: 10 Year Limited

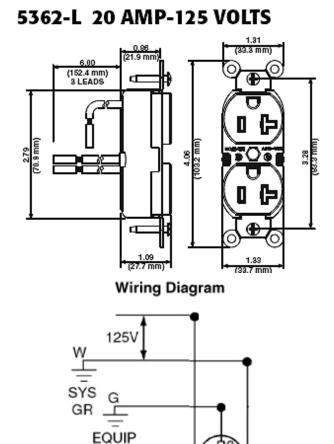

5-20R

# SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

GR

## Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747 Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

## Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

## Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

## Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

## Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

