


# Lev-Lok® Decora Plus™ Switches

Heavy-Duty Industrial Specification Grade

Single-Pole and 3-Way

15 A and 20 A, 120/277 VAC

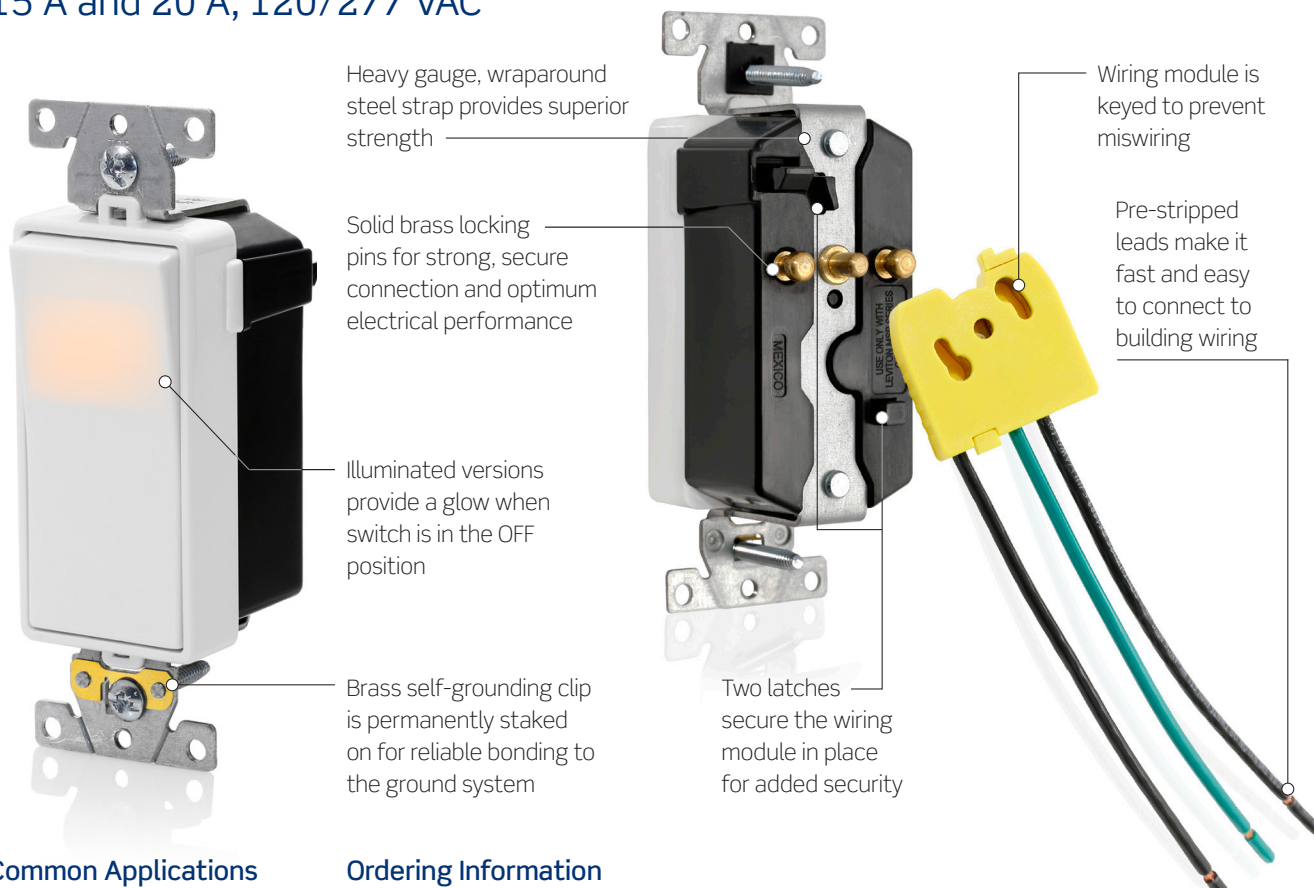

## Common Applications

- Educational
- Institutional
- Office
- Hospitality

## Ordering Information

Amps	Color	Standard		Illuminated	
		Single-Pole	3-Way	Single-Pole	3-Way
15 A	Ivory	M5691-I	M5693-I	—	—
	White	M5691-W	M5693-W	—	—
	Lt Almond	M5691-T	M5693-T	—	—
	Gray	M5691-GY	M5693-GY	—	—
20 A	Ivory	M5621-I	M5623-I	M5631-I	M5633-I
	White	M5621-W	M5623-W	M5631-W	M5633-W
	Lt Almond	M5621-T	M5623-T	M5631-T	M5633-T
	Gray	M5621-GY	M5623-GY	—	—
	Red	M5621-R	M5623-R	—	—

## Wiring Modules

Leads	Single-Pole	3-Way
Stranded	MSPSW-ST	M3WSW-ST
Solid	MSPSW-SD	M3WSW-SD


Additional wiring module options available – visit [www.leviton.com/levlok](http://www.leviton.com/levlok) for details

## Specifications


Series	M5691/M5693	M5621/M5623/ M5631/M5633
AC Horsepower Rating		
At Rated Voltage	½ hp @ 120 V, 2 hp @ 240 V	1 hp @ 120 V, 2 hp @ 240 V
Electrical Specifications		
Amperage	15 A	20 A
Voltage	120/277 VAC	
Grounding	Self-Grounding	
Dielectric Voltage	Withstands 1500 V for 1 minute	
Overload (UL 20)	100 cycles of OL at 4.8 times rated current	
Temperature Rise	Max 30°C rise	
Endurance	30,000 cycles min	
Environmental Specifications		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous 60°C, minimum -40°C (w/o impact)	
Material Specifications		
Strap	.046" Thick Galvanized Steel	
Base	Nylon	
Frame	Polycarbonate	
Contacts	Silver-Alloy	
Ground-Clip	Brass	
Actuator	Polycarbonate	
Mechanical Specifications		
Product ID	Ratings are permanently marked on the device	
Terminal ID	Labeled on wiring model, switch is keyed to ensure proper installation	
Terminal Accommodation	Wiring Module	
Standards & Certifications		
NEMA	WD 1 & WD 6	
ANSI	C-73	
Certification/ Listing	cULus (File #E7458)	
Applicable Standards	UL20, CSA C22.2 No. 111	
RoHS	Compliant	
Warranty		
Product Warranty	10-Year Limited	

## Dimensions


Front View, Both Single-Pole and 3-Way

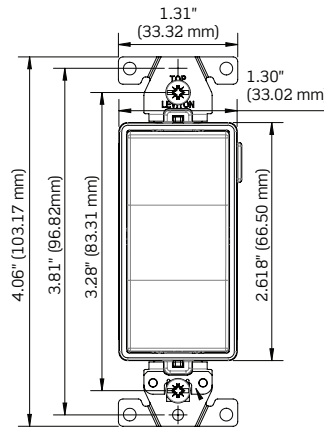


Side View, Single-Pole

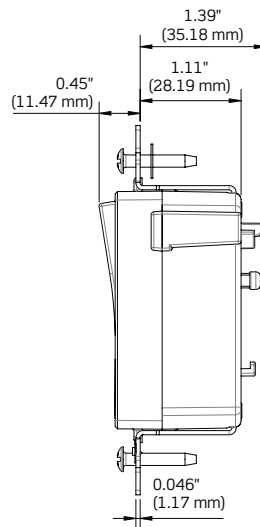


Front and Side View, MSPSW Module

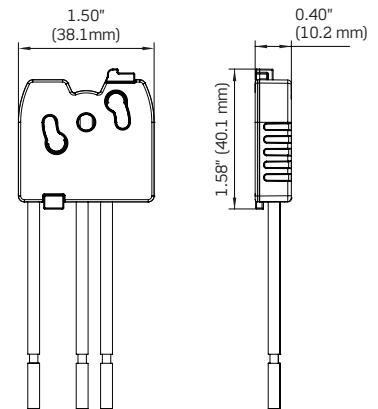

Side View, 3-Way

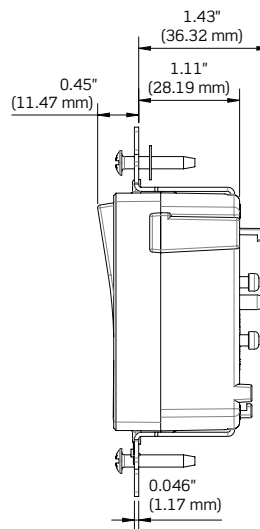

Front and Side View, M3WSW Module

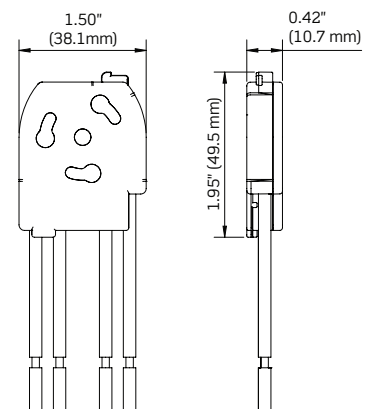

Visit our Website at:  
[www.leviton.com/levlok](http://www.leviton.com/levlok)  
 email: [commercial@leviton.com](mailto:commercial@leviton.com)

Q-1102A

051518

**Leviton Manufacturing Co., Inc.**  
 201 N Service Rd, Melville, NY 11747  
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538  
 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005  
 © 2018 Leviton Manufacturing Co., Inc. All rights reserved.

