

3775



Color: N/A Gray Metal

UPC Code: 07847784014

Country Of Origin: Mexico

NEMA:
Non-NEMA



Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

50 Amp, 250 Volt DC/600 Volt AC, Non-NEMA, 3P, 4W, Black & White Locking Flanged Inlet, Industrial Grade, Grounding - GRAY METAL

Technical Information

Electrical Specifications

Temperature Rise: Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Grounding: Grounding

Amperage: 50 A

Voltage: 250 VAC

Pole: 3

Wire: 4

Dielectric Voltage: Withstands 2000V per UL498

Maximum Working Voltage: 250V DC/600V AC as rated

Current Interrupting: Certified for current interrupting at full rated current

Environmental Specifications

Operating Temperature: -40°C to 75°C

Flammability: Rated V-2 per UL 94

Environment: Dry

Material Specifications

Line Contacts: Solid Brass

Face Module: Nylon

Body & Contract Carrier: Reinforced Nylon

Flanged Casing: Zinc Plated Steel

Inlet Blade: 0.100inch thick Brass

Terminal Block: 0.062inch thick Copper

Terminal Set Screw: SS 302/304

Ground Shunt: Bronze

Grounding Shunt Rivet: Brass

Color: Gray Metal

Mechanical Specifications

Terminal ID: X, W, Y, Z and Green for ground

Terminal Accom.: #10 min to #4max AWG Solid or Stranded Wire

Product ID: Ratings and Catalogue No. molded into face

Product Features

Color: Gray Metal

Standards and Certifications: UL

Warranty: Lifetime Limited

NEMA: Non-NEMA

Device Type: Locking Flanged Inlet

Brand: Black and White

Standards and Certifications


UL498: File E13399

CSA C22.2 No. 42: File 152105

NOM: 057

RoHS: Compliant

Warranty: Lifetime Limited

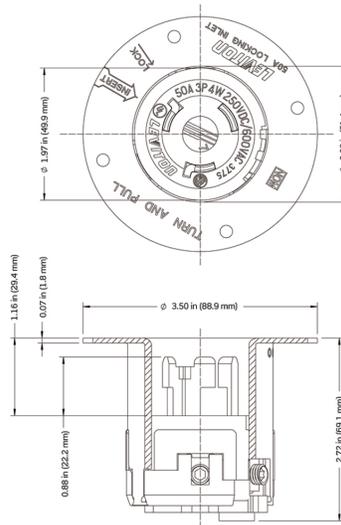

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

