



ISOSTATIC
LEADERS IN BRONZE BEARINGS...and MORE


Isostatic Industries, Inc.
4153 North Kostner Avenue
Chicago, IL 60641
Toll Free: 800.621.5500
Phone: 773.286.3444
Fax: 773.282.3323
Email: info@isostatic.com

Item # 706025, TP® Lead Free Steel-Backed PTFE Lined Flange Bearings - METRIC

Isostatic TP® Flange Bearings

- Standard stock products
- Self-lubricating dry sliding bearing
- A steel-backed composite material comprised of:
 - Low carbon steel backing for extremely high load capacity - .50 – 2.7 mm thick
 - Sintered bronze offers optimal heat dispersion – .20 - .35 mm thickness and
 - PTFE – lead free sliding surface creates a low friction coefficient and allows for a wide temperature range – thickness .2 mm
- Can be used where many liquid lubricants fail; also performs well with

[+ more](#)

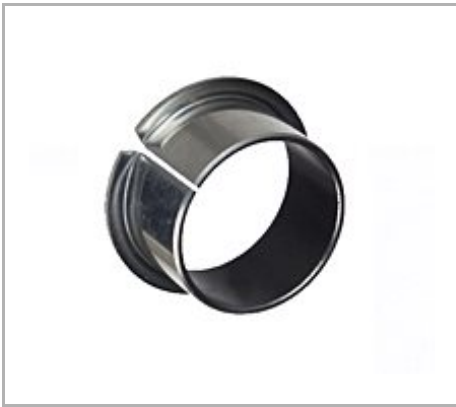

[Description](#) | [Specifications](#) | [Dimensions](#) | [Tolerances](#) | [Performance Data](#)

Description

Detailed Description

20 MM I.D. x 23 MM O.D. x 11.5 MM Length, TP, Lead Free Steel Back, PTFE Lined Composite, Flange Bearing, Metric

Specifications

Catalog Number	FM2011.5TP
Interchange #	EGF20115-E40
Unit of Measure	Each
Material	Lead Free Steel-Backed PTFE
Material Standard	Lead Free Steel-Backed PTFE

Avg Unit Weight	0.0232 lb
UPC Code	00846802081577

Dimensions

Nominal Inner Diameter	20 mm
Nominal Outer Diameter	23 mm
Nominal Length	12 mm
Flange Nominal Outer Diameter	30 mm
Flange Nominal Thickness	1.5 mm
Recommended Housing Bore	23.000 to 23.021 mm
Recommended Shaft Size	19.959 to 19.980 mm

Tolerances

Overall Length Tolerance	±.25 mm
Flange Diameter Tolerance	±.50 mm
Flange Thickness Tolerance	1.30 to 1.50 mm

Performance Data

Load - P Max Value	36,250 lb/in ²
Speed - V Max Value	1,900 ft ² /min
Load at Speed - PV Max Value (P.S.I. / S.F.M.)	102,000