



ISOSTATIC
LEADERS IN BRONZE BEARINGS...and MORE


Isostatic Industries, Inc.
4153 North Kostner Avenue
Chicago, IL 60641
Toll Free: 800.621.5500
Phone: 773.286.3444
Fax: 773.282.3323
Email: info@isostatic.com

Item # 706001, TP® Lead Free Steel-Backed PTFE Lined Flange Bearings - METRIC

Isostatic TP® Flange Bearings

- Standard stock products
- Self-lubricating dry sliding bearing
- A steel-backed composite material comprised of:
 - Low carbon steel backing for extremely high load capacity - .50 – 2.7 mm thick
 - Sintered bronze offers optimal heat dispersion – .20 - .35 mm thickness and
 - PTFE – lead free sliding surface creates a low friction coefficient and allows for a wide temperature range – thickness .2 mm
- Can be used where many liquid lubricants fail; also performs well with

[+ more](#)

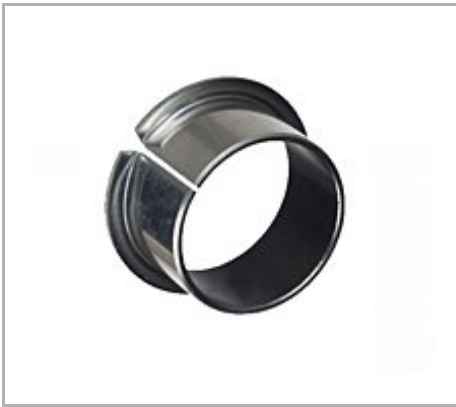

[Description](#) | [Specifications](#) | [Dimensions](#) | [Tolerances](#) | [Performance Data](#)

Description

Detailed Description

6 MM I.D. x 8 MM O.D. x 4 MM Length, TP, Lead Free Steel Back, PTFE Lined Composite, Flange Bearing, Metric

Specifications

Catalog Number	FM0604TP
Interchange #	BB0604DP4 EGF06040-E40
Unit of Measure	Each
Material	Lead Free Steel-Backed PTFE
Material Standard	Lead Free Steel-Backed PTFE

Avg Unit Weight	0.002 lb
UPC Code	00846802081331

Dimensions

Nominal Inner Diameter	6 mm
Nominal Outer Diameter	8 mm
Nominal Length	4 mm
Flange Nominal Outer Diameter	12 mm
Flange Nominal Thickness	1 mm
Recommended Housing Bore	8.000 to 8.015 mm
Recommended Shaft Size	5.978 to 5.990 mm

Tolerances

Overall Length Tolerance	±.25 mm
Flange Diameter Tolerance	±.50 mm
Flange Thickness Tolerance	.80 to 1.00 mm

Performance Data

Load - P Max Value	36,250 lb/in ²
Speed - V Max Value	1,900 ft ² /min
Load at Speed - PV Max Value (P.S.I. / S.F.M.)	102,000