



**Color:** White

**UPC Code:** 07847718834

## OSWHB-IOW

### Brand Features

Specifically designed for long, relatively narrow spaces such as warehouse aisle and corridors, the OSWHB-IOW Occupancy Sensor provides long range and high sensitivity. The OSWHB-IOW Occupancy Sensor is a "high bay" lens. This lens provides coverage up to 55 ft. when mounted 30 ft. above the floor. Can be mounted lower if needed. The mounting base, provided with the sensor, allows quick and easy mounting in corners, on walls or on ceilings. The most common applications are factory storage areas, warehouse aisles and corridors. The OSWHB-IOW sensor combines PIR technology with a microprocessor based digital architecture. By eliminating false triggering, the sensor provides a trouble-free "install and forget" solution for lighting control.

### Item Description

High-bay, PIR, Occupancy Sensor, Wall Mounted, 24VDC, 15mA power consumption, 30' mounting height, 55' length x 7' width (major motion only), Red LED=PIR, auto adapting, walk-through, time delay 30s-30m, test mode (6s time delay for 15m with auto exit), connect gray wire for photocell ambient light hold-off, 360 degree harmonic wheel (rotatable), mounting height 8'-10', Patented Canopy Knuckle for versatile wall and ceiling mounting options, cUL/NOM/ANCE listed, Color: off-white

### Features and Benefits

- Combines PIR Technology with a microprocessor based digital architecture. By eliminating false triggering, the sensor provides a trouble-free "install and forget" solution for lighting control
- Self-adjusting settings continuously analyze and adjust infrared sensitivity, timer operation, and long term performance
- Adjustable swivel neck rotates 80 degrees vertically and 60 degrees horizontally. Can be used for ceiling or wall mounting
- Ambient light override prevents lights from turning on when there is ample natural light
- Self-Adjusting delayed-off time interval settings for 30 seconds to 30 minutes. Compensates for real-time occupancy patterns- preventing unnecessary on/off switching
- Non-volatile memory preserves all automatic and manual settings during power outages.
- Fast, simple installation using 3 color-coded low-voltage wires and a single mounting post
- Excellent 5-Year Limited warranty
- Typical Applications: Long narrow spaces such as Warehouse Aisles and Corridors where a high mounting height (up to 30 Feet) is desirable

**Patents\***


US7211798

USD511705

US7560696

USD548125

\*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

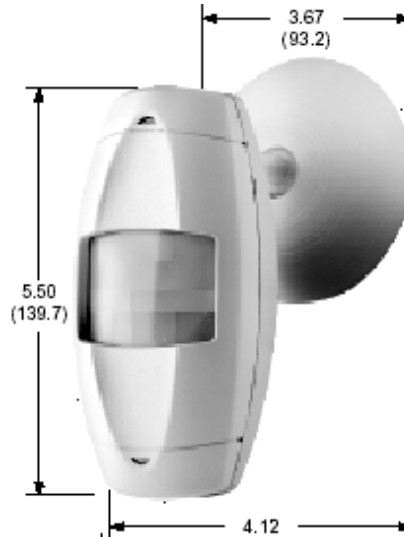

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

