



**Color:** White

**UPC Code:** 07847725978

**Country Of Origin:** Mexico

**NEMA:**  
5-20R



## 5362-LW

### Brand Features

Leviton's line of Extra Heavy-Duty Industrial Grade receptacles are designed and manufactured to withstand the harsh conditions typically associated with industrial environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, hospital grade, etc., these Industrial Grade devices are the electrical contractor's choice for use in factories, schools, hospitals and commercial office buildings.

### Item Description

Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

### Technical Information

#### AC Horsepower Ratings

**At Rated Voltage:** 1 HP

#### Electrical Specifications

**Temperature Rise:** Max 30C after 100 cycles OL at 150 percent rated current

**Grounding:** Self-Grounding

**Amperage:** 20 A

**Voltage:** 125 VAC

**Pole:** 2

**Wire:** 3

**Dielectric Voltage Withstand:** 2000V minimum per UL 498

**Maximum Working Voltage:** 125V as rated

**Current Interrupting:** Certified for current interrupting at full rated current

#### Environmental Specifications

**Flammability:** Rated V-2 per UL 94

**Operating Temperature:** -40°C to 60°C

#### Material Specifications

**Terminal Screws:** 12GA THHN Wire Lead 6 Inch

**Grounding Screw:** 12GA THHN Green Wire Lead 6 Inch

**Cover Material:** Nylon

**Base Material:** Polycarbonate

**Strap Material:** Galvanized Steel with Riveted Ground Contacts

**Line Contacts:** Phosphor Bronze

**Terminal Leads:** 6", #12 AWG THHN

**Grounding Leads:** 6", #12 AWG THHN

**Bushing:** Die Cast Aluminum

**Mounting Screws:** Triple Combination Head, Steel

**Wiring:** 1 Hot Lead, 1 Neutral Lead, 1 Ground Lead

**Color:** White

#### Mechanical Specifications

**Terminal ID:** Black-Hot, White-Neutral, Green-Ground

**Lead Identification:** Leads identified in accordance with UL 498 (black, white & green)

**Product ID:** Ratings are permanently marked on device

**Termination:** Pre-Wired Leads

#### Product Features

**NEMA:** 5-20R

**Termination:** Pre-Wired Leads

**Color:** White

**Device Type:** Duplex Receptacle Outlet

**Feature 4:** Smooth Face

**Grade:** Heavy-Duty Industrial Specification Grade

#### Standards and Certifications

**NEMA:** WD-6

**ANSI:** C-73

**UL 498:** File E13399


**UL Fed Spec WC-596:** File E13399

**CSA C22.2 No. 42:** File 152105


**NOM:** 057

**Warranty:** 10 Year Limited

## 5362-L 20 AMP-125 VOLTS

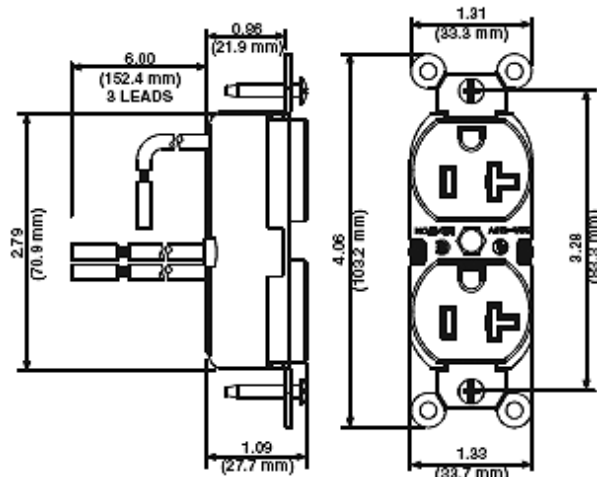

Wiring Diagram

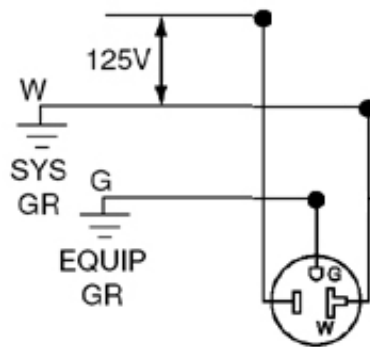

5-20R

### SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

#### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

#### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

