



**UPC Code:** 07847748033

**Country Of Origin:** Mexico

## MS4X-402

### Brand Features

Powerswitch® Industrial Grade AC Manual Motor Controllers provide safe, reliable control of a variety of motor loads. Typical applications include manual ON/OFF switching control of conveyor systems, pumping machines, HVAC systems, air compressors and other heavy manufacturing equipment. These motor controllers are available for both single-phase and three-phase applications.

### Item Description

40 Amp, 600 VAC, 2-Pole, Non-Fused Manual Motor Controller, Suitable as Motor Disconnect, Type 4X Thermoplastic Enclosure, IP67-Watertight, NSF Certified

## Technical Information

### AC Horsepower Ratings

**tsa\_120vac:** 2HP

**tsa\_240vac:** 5HP

**tsa\_480vac:** 10HP

**tsa\_600vac:** 15HP

### Electrical Specifications

**Amperage:** 40 A

**Dielectric Voltage:** Withstands 2200V for 1 min.

**Endurance:** 6,000 cycles inductive motor type load

**Flammability:** Rated V-0 per UL 94

**Grounding:** Non-Grounding

**Operating Temperature:** -40°C to 60°C

**Overload UL20 Test:** 100 cycles of OL at 4.8 times rated current

**Pole:** 2

**tsa\_short\_circuit\_rating:** 10,000 RMS symmetrical amps at 600VAC (when fuse protected)

**Temperature Rise:** 50°C Max at full rated current

**Voltage:** 600 VAC

### Environmental Specifications

**Dust:** Type 12K per UL 50

**Enclosure Rating:** Type 4X

**Hosedown:** Type 4X per UL 50

**Rain:** Type 3R per UL 50

### Material Specifications

**Contacts:** Silver-Cadmium .031 Thick

**Enclosure:** Thermoplastic Polyester

**tsa\_external\_handle:** Thermoplastic Polyester

**tsa\_external\_hardware:** Stainless Steel

**tsa\_switch\_mechanism\_base:** Thermoplastic Polyester

**tsa\_switch\_mechanism\_face:** Thermoplastic Polyester

**tsa\_switch\_mechanism\_strap:** Nickel Plated Brass

**tsa\_switch\_mechanism\_toggle:** Thermoplastic Polyester

**Terminal Screws:** Nickel-Plated Brass 10-32

### Mechanical Specifications

**Crush Test:** 100 lbs

**Impact:** 1.2 lb ball dropped from 5 ft

**tsa\_knockout\_test:** Remains in place with 20lb push

**Mold Stress Relief:** 70°C for 7 hours

**Product ID:** Ratings are permanently marked on device

**Terminal Accom.:** #10-#8 AWG

**Terminal ID:** T1, T2, L1, L2 marked on back of switch mechanism

**Termination:** Switch Mechanism Back & Side

**Torque Range:** 20 inch pounds

### Standards and Certifications

**ANSI:** C-73

**cUL per CSA C22.2 No. 111:** File #E63969

**NEMA:** WD-1 & WD-6

**NOM:** NOM-ANCE


**tsa\_nsf:** 14159-1 Meat & Poultry Processing Equipment

**UL 60947-4-1:** supersedes UL 508

**Warranty:** 10-Year Limited

### Product Features

**Device Type:** Manual Motor Controller

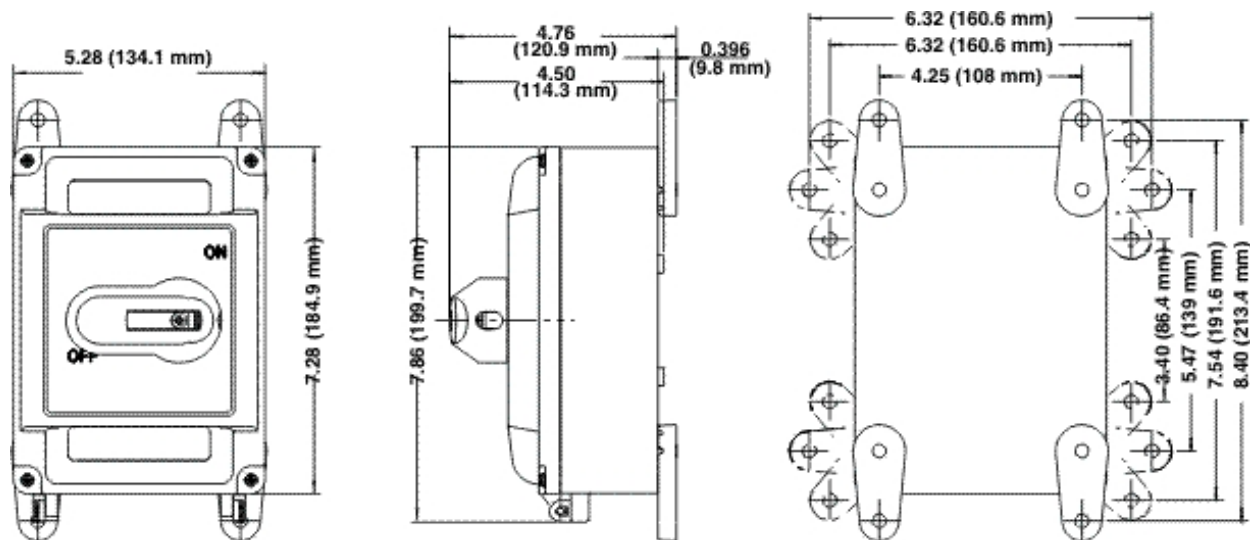

## SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

