



ISOSTATIC
LEADERS IN BRONZE BEARINGS...and MORE


Isostatic Industries, Inc.
4153 North Kostner Avenue
Chicago, IL 60641
Toll Free: 800.621.5500
Phone: 773.286.3444
Fax: 773.282.3323
Email: info@isostatic.com

Item # 502029, TU® Steel-Backed PTFE Lined Flange Bearings - INCH

Isostatic TU® Flange Bearings

- Standard stock products
- Self-lubricating dry sliding bearing
- A steel-backed composite material comprised of:
 - Low carbon steel backing for extremely high load capacity-.50 – 2.7mm thick
 - Sintered bronze offers optimal heat dispersion –.20 - .35 mm thickness and
 - PTFE – lead sliding surface creates a low friction coefficient and allows for a wide temperature range – thickness .2 mm
- Can be used where many liquid lubricants fail; also performs well with

[+ more](#)

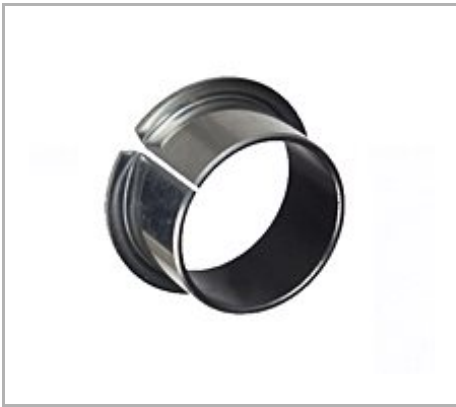

[Description](#) | [Specifications](#) | [Dimensions](#) | [Tolerances](#) | [Performance Data](#)

Description

Detailed Description

1.5 IN I.D. x 1.6563 IN O.D. x 1.5000 IN Length, TU, Steel Back, PTFE & Pb Lined Composite, Flange Bearing

Specifications

Catalog Number	24FTU24
Interchange #	24FDU24
Unit of Measure	Each
Material	Steel-Backed PTFE Lined
Material Standard	Steel-Backed PTFE Lined

Avg Unit Weight	0.1738 lb
UPC Code	00846802058173

Dimensions

Nominal Inner Diameter	1 1/2 in
Nominal Outer Diameter	1 21/32 in
Nominal Length	1 1/2 in
Flange Nominal Outer Diameter	2 in
Flange Nominal Thickness	5/64 in
Recommended Housing Bore	1.6558 to 1.6568 in
Recommended Shaft Size	1.4972 to 1.4988 in

Tolerances

Overall Length Tolerance	±.01 in
Flange Diameter Tolerance	±.02 in
Flange Thickness Tolerance	.075 to .083 in

Performance Data

Load - P Max Value	36,250 lb/in ²
Speed - V Max Value	1,900 ft ² /min
Load at Speed - PV Max Value (P.S.I. / S.F.M.)	102,000